MIL-C-24308/22B
20 May 1983
SUPERSEDING
MIL-C-24308/22A
30 April 1980

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHIELD, STRAIGHT, NONENVIRONMENTAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-24308.

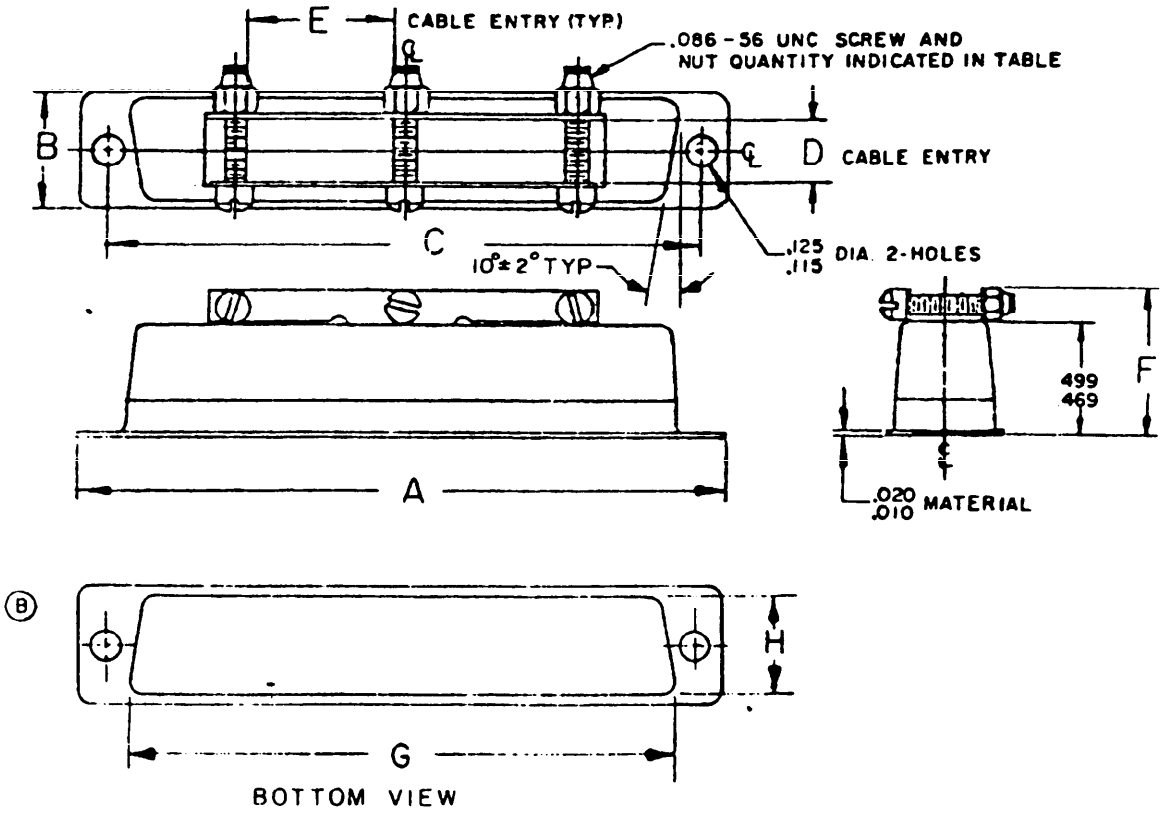


FIGURE 1. Configuration and dimensions.

(B) denotes changes.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 202610-19T21:09Z
Check the source to verify that this is the current version before use.

Ⓑ

Part number Steel	Part number Nonmagnetic	Shell size	No of screws	A	B	C	D	E	F	G	H
M24308/22-2	M24308/22-7	2	2	1.546 1.516	.515 .485	1.317 1.307	.311 .281	.327 .297	.679 .609	1.106 1.076	.457 .427
M24308/22-3	M24308/22-8	3	2	2.093 2.063	.515 .485	1.857 1.847	.311 .281	.811 .781	.679 .609	1.646 1.616	.457 .427
M24308/22-4	M24308/22-9	4	3	2.733 2.703	.515 .485	2.505 2.495	.311 .281	.702 .672	.679 .609	2.297 2.267	.457 .427
M24308/22-5	M24308/22-10	5	3	2.640 2.610	.624 .594	2.411 2.401	.405 .375	.702 .672	.703 .685	2.220 2.190	.580 .550

Part name	Material	Finish
Nut .086-56	Steel	Yellow chromate over cadmium per QQ-P-416, type II class 2 or zinc per QQ-Z-325 type II, .0002 minimum thickness
	Brass	
Screw .086-56 UNC x .437 LG.	Steel	
	Brass	
.500 LG. for shell size 5		
Shell	Low carbon steel sheet S.A.E. 1010	
	Soft rolled brass per QQ-B-613, comp. 2, Anl. temper	

Ⓑ

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.010	.25	.469	11.91	.703	17.86	2.093	53.16
.020	.51	.485	12.32	.781	19.84	2.190	55.63
.086	2.18	.499	12.67	.811	20.60	2.220	56.39
.115	2.92	.500	12.70	1.076	27.33	2.267	57.58
.125	3.18	.515	13.08	1.106	28.09	2.297	58.34
.281	7.14	.550	13.97	1.307	33.20	2.401	60.99
.297	7.54	.580	14.73	1.317	33.45	2.411	61.24
.311	7.90	.594	15.09	1.516	38.51	2.495	63.37
.327	8.31	.609	15.46	1.546	39.27	2.505	63.63
.375	9.53	.624	15.85	1.616	41.05	2.610	66.29
.405	10.29	.672	17.07	1.646	41.81	2.640	67.06
.427	10.85	.679	17.25	1.847	46.91	2.703	68.66
.437	11.10	.685	17.40	1.857	47.17	2.733	69.42
.457	11.61	.702	17.83	2.063	52.40		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Screws and nuts are shown assembled for reference only and are to be shipped unassembled in a common container with the junction shell.

FIGURE 1. Configuration and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:09Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI, AR
Navy - AS
Air Force - 11, 99
DLA - ES

User activities:
Army - ME, AT
Navy - CG, MC, OS

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3268-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:09Z
Check the source to verify that this is the current version before use.

• Ensuring that production activities delegated authority for

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:09Z
Check the source to verify that this is the current version before use.