
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SCREW-LOCK ASSEMBLY, MALE

PART NUMBERS M24308/25-1 AND -5 ARE INACTIVE FOR NEW DESIGN AS OF THE DATE OF THIS SPECIFICATION. FOR NEW DESIGN USE M24308/25-9 AND -10 RESPECTIVELY.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the assemblies described herein shall consist of this specification and the latest issue of MIL-C-24308.

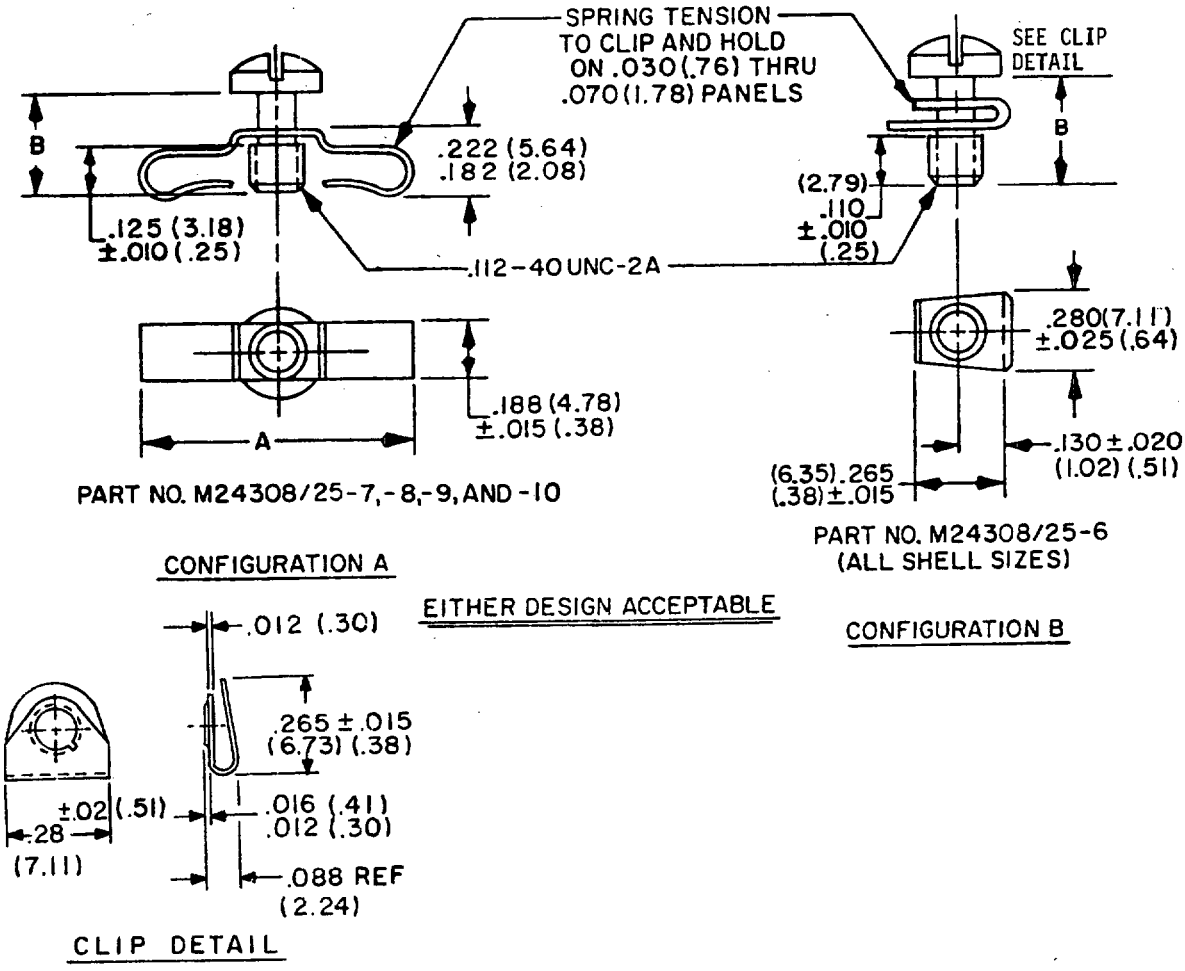

Ⓔ FIGURE 1. Dimensions and configurations.

Ⓔ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:13Z
Check the source to verify that this is the current version before use.

Dash number	Applicability				Dimensions 1/ 2/ 3/		Superseded dash number
	Without shields per MIL-C-24308/21, /22		With shields per MIL-C-24308/21, /22		A	B	
	Connector MIL-C-24308/	Shell size	Connector MIL-C-24308/	Shell size			
Ⓔ -6	1, 2, 3, 4	1,2,3 4,5,6			See configuration B	+.000 .250 (.00) (6.35) -.031 (.78)	---
-7			3, 4	3, 4	.555 ±.015 (14.10) (.38) See configuration A	.312 ±.010 (7.92) (.25)	---
-8			3, 4	5	.656 ±.015 (16.66) (.38) See configuration A	.312 ±.010 (7.92) (.25)	---
-9 4/	1, 2, 3, 4	1,2,3, 4	3, 4 1, 2	1,2 1,2,3, 4	.555 ±.015 (14.10) (.38) See configuration A	.281 ±.010 (7.14) (.25)	-1, -2, -3, -4
-10 4/	1, 2, 3, 4	5	1, 2	5	.656 ±.015 (16.66) (.38) See configuration A	.281 ±.010 (7.14) (.25)	-5

NOTES:

1/ Dimensions are in inches.
2/ Metric equivalents are in parentheses.
3/ Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4/ Used for government logistics support of items previously covered by -1 and -5.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Screws - Cold rolled steel.
Clips - Sheet steel.

Finish: Dash numbers 7, 8, 9, and 10 - Yellow chromate over cadmium per QQ-P-416.

Dash number 6: Screw - Yellow chromate over zinc per QQ-Z-325.

Clip - Yellow chromate over zinc per QQ-Z-325 or aluminum coating.

Screws shall be captive in the clip.

Qualification inspection: The following tests shall be performed on 3 samples (defined below) in accordance with MIL-C-24308:

Visual examination

Shock

Vibration

Visual examination

Test sample: Each sample shall consist of a M24308/25 dash number assembled to the applicable pair of mated connectors with M24308/26-9 attached.

Part number: M24308/25 - (dash number from figure 1).

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI, AV
Navy - AS, SH
Air Force - 11, 99
DLA - ES

User activities:
Army - ME, AT
Navy - CG, MC

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3478)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:13Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-24308/25E	Connectors, Electric, Rectangular, Miniature, Polarized Shell, Rack and Panel, Screw-Lock Assembly, Male

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:13Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:13Z
Check the source to verify that this is the current version before use.