INCH-POUND


MIL-C-24308/25F
19 January 1993
SUPERSEDING
MIL-C-24308/25E
19 November 1984


MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SCREW-LOCK ASSEMBLY, MALE

This specification is approved for use by all Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-24308

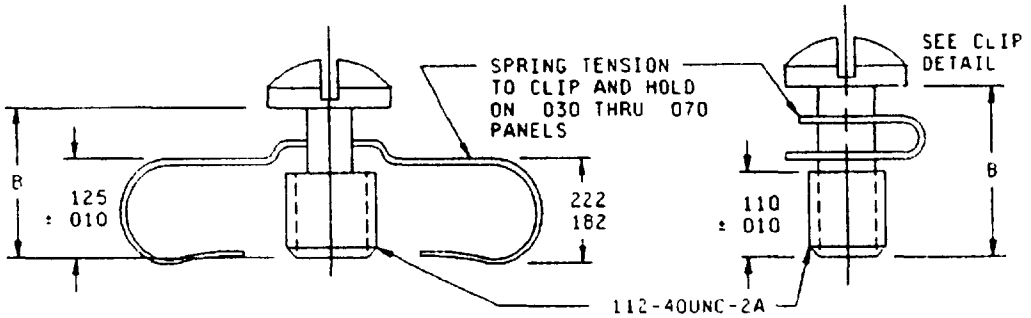

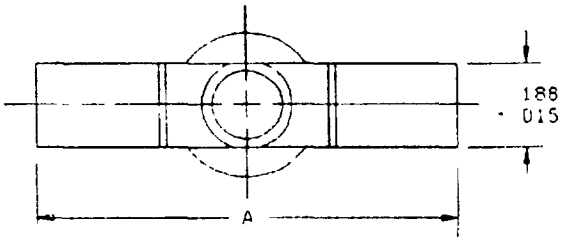

MS24308/25-7-,-8,-9, AND -10

CONFIGURATION A



MS24308/25-6
(ALL SHELL SIZES)

CONFIGURATION B


EITHER DESIGN IS ACCEPTABLE

FIGURE 1 Dimensions and configurations

(F) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:13Z
Check the source to verify that this is the current version before use.

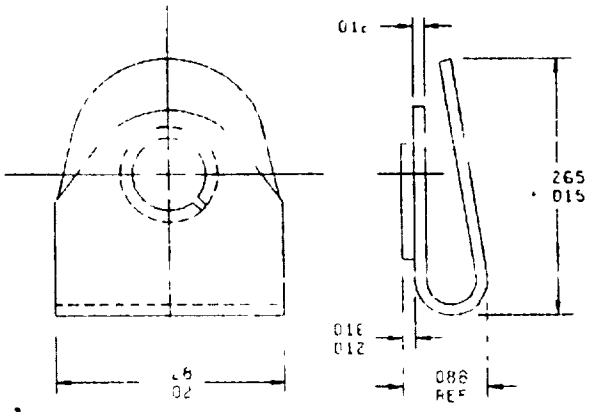

Inches	mm	Inches	mm	Inches	mm	Inches	mm
010	0 25	020	0 51	110	2 79	188	4 78
012	0 30	025	0 64	112	2 84	222	5 64
015	0 38	030	0 76	125	3 18	265	6 73
016	0 41	070	1 78	130	3 30	28	7 1
02	0 5	088	2 24	182	4 62	280	7 11

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:13Z
Check the source to verify that this is the current version before use.

Dash no	Applicability				Dimensions 1/ 2/ 3/		Superseded dash number
	Without shields per MIL-C-24308/21, /22		With shields per MIL-C-24308/21, /22		A	B	
	Connector MIL-C-24308/	Shell size	Connector MIL-C-24308/	Shell size			
-6	1, 2, 3, 4	1,2,3 4,5,6			See configuration B	+ 000 250 (0 00) (6 35)- 031 (0 79)	---
-7			3, 4	3, 4	555 ± 015 (14 10) (0 38) See configuration A	312 ± 010 (7 92) (0 25)	---
-8			3, 4	5	656 ± 015 (16 66) (0 38) See configuration A	312 ± 010 (7 92) (0 25)	---
-9 4/	1, 2, 3, 4	1,2,3 , 4	3, 4 1, 2	1,2 1,2,3 4	555 ± 015 (14 10) (0 38) See configuration A	281 ± 010 (7 14) (0 25)	-1,-2, -3,-4
-10 4/	1, 2, 3, 4	5	1, 2	5	656 ± 015 (16 66) (0 38) See configuration A	281 ± 10 (7 14) (0 25)	-5

NOTES
1/ Dimensions are in inches
2/ Metric equivalents are in parentheses
3/ Metric equivalents are given for general information only
(F) 4/ M24308/25-1 through -5 are canceled, for new design use -9 or -10

FIGURE 1 Dimensions and configurations - Continued

REQUIREMENTS

Dimensions and configuration See figure 1

(F) Material

Screws Cold rolled steel or corrosion resistant steel in accordance with ASTM-A-582

Clips Sheet steel or corrosion resistant steel in accordance with ASTM-A-666

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:13Z
Check the source to verify that this is the current version before use.

(F) Finish Dash numbers 7, 8, 9, and 10 (cold rolled and sheet steel), yellow chromate over cadmium in accordance with QQ-P-416

Dash number 6

Screw (cold rolled steel), yellow chromate over zinc in accordance with QQ-Z-325

Clip (sheet steel), yellow chromate over zinc in accordance with QQ-Z-325 or aluminum coating

Dash numbers 6, 7, 8, 9, 10 (corrosion resistant steel), shall be passivated in accordance with QQ-P-35

(F) Screws shall be captive in the clip after assembly by the end user and corrosion resistant steel screws shall be used with corrosion resistant steel clips and cold rolled screws shall be used with sheet steel clips

Qualification inspection The following tests shall be performed on three samples (defined below) in accordance with MIL-C-24308

Visual examination

Shock

Vibration

Visual examination

(F) Test sample Each sample shall consist of a M24308/25 dash number assembled to the applicable pair of mated connectors with M24308/26-1 or 24308/26-2 attached

Part number example M24308/25 - 6 P

(Dash number from figure 1) 6

Finish P

(F) F - Cadmium, P - Passivated stainless steel, no suffix cadmium or zinc

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI, AV
Navy - AS, SH
Air Force - 11, 99
DLA - ES

User activities
Army - ME, AT
Navy - CG, MC

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5935-3909-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:13Z
Check the source to verify that this is the current version before use.