INCH-POUND

MIL-DTL-24308/25H
19 July 2000
SUPERSEDING
MIL-PRF-24308/25G
2 December 1996

DETAIL SPECIFICATION SHEET

# CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SCREW-LOCK ASSEMBLY, MALE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24308.

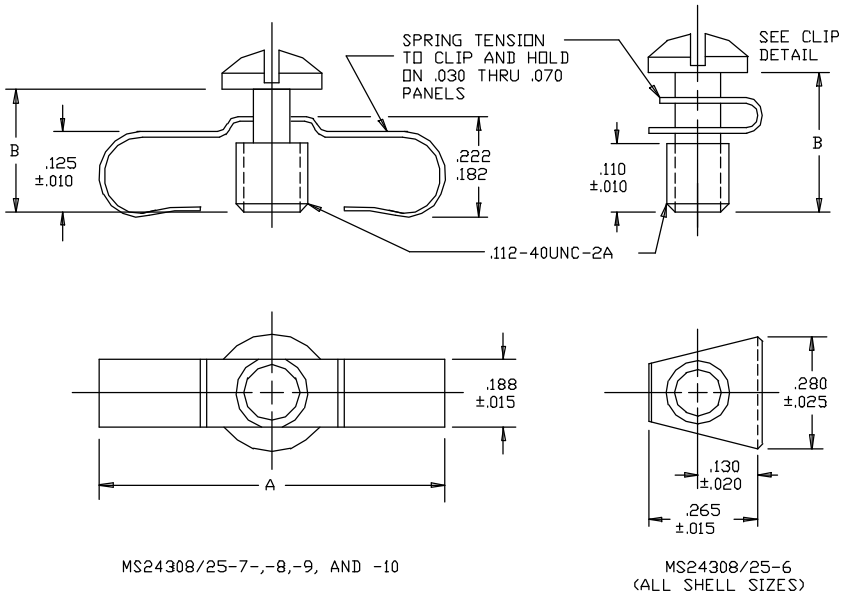


CONFIGURATION A CONFIGURATION B

EITHER DESIGN IS ACCEPTABLE

FIGURE 1. Dimensions and configurations.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:12Z
Check the source to verify that this is the current version before use.

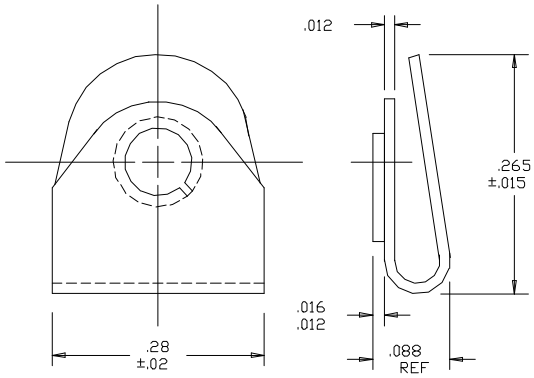


| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .010 | 0.25 | .020 | 0.51 | .110 | 2.79 | .188 | 4.78 |
| .012 | 0.30 | .025 | 0.64 | .112 | 2.84 | .222 | 5.64 |
| .015 | 0.38 | .030 | 0.76 | .125 | 3.18 | .265 | 6.73 |
| .016 | 0.41 | .070 | 1.78 | .130 | 3.30 | .28 | 7.1 |
| .02 | 0.5 | .088 | 2.24 | .182 | 4.62 | .280 | 7.11 |

FIGURE 1. Dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:12Z
Check the source to verify that this is the current version before use.

| Dash no. | Applicability | | | | Dimensions 1/ 2/ 3/ | | Superseded dash number |
|---|---|---|---|---|---|---|---|
| | Without shields in accordance with MIL-C-85049/48-2, -3 | | With shields in accordance with MIL-C-85049/48-2, -3 | | A | B | |
| | Connector MIL-DTL-24308/ | Shell size | Connector MIL-DTL-24308/ | Shell size | | | |
| -6 | 1, 2, 3, 4 | 1,2,3<br>4,5,6 | | | See configuration B | +.000<br>.250 (0.00)<br>(6.35)-.031<br>(0.79) | --- |
| -7 | | | 3, 4 | 3, 4 | .555 ±.015<br>(14.10) (0.38)<br>See configuration A | .312 ±.010<br>(7.92) (0.25) | --- |
| -8 | | | 3, 4 | 5 | .656 ±.015<br>(16.66) (0.38)<br>See configuration A | .312 ±.010<br>(7.92) (0.25) | --- |
| -9 4/ | 1, 2, 3, 4 | 1,2,3,<br>4 | 3, 4<br>1, 2 | 1,2<br>1,2,3<br>4 | .555 ±.015<br>(14.10) (0.38)<br>See configuration A | .281 ±.010<br>(7.14) (0.25) | -1,-2,<br>-3,-4 |
| -10 4/ | 1, 2, 3, 4 | 5 | 1, 2 | 5 | .656 ±.015<br>(16.66) (0.38)<br>See configuration A | .281 ±.10<br>(7.14) (0.25) | -5 |

NOTES:

1/ Dimensions are in inches.
2/ Metric equivalents are in parentheses.
3/ Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4/ M24308/25-1 through -5 are inactive for new design, for new design or government logistic support use -9 or -10.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Screws - Cold rolled steel or corrosion resistant steel in accordance with ASTM-A-582.

Clips - Sheet steel or corrosion resistant steel in accordance with ASTM-A-666.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:12Z
Check the source to verify that this is the current version before use.

Finish: Cold rolled and sheet steel - Yellow chromate over cadmium in accordance with QQ-P-416 or an equivalent industry standard when available.

Screw (Cold rolled steel) - Yellow chromate over zinc in accordance with ASTM B633 or an equivalent industry standard when available.

Clip (sheet steel) - Yellow chromate over zinc in accordance with ASTM B633 or an equivalent industry standard when available or aluminum coating.

Corrosion resistant steel - Shall be passivated in accordance with ASTM A967.

Screws shall be captive in the clip after assembly by the end user and corrosion resistant steel screws shall be used with corrosion resistant steel clips and cold rolled screws shall be used with sheet steel clips.

Qualification inspection: The following tests shall be performed on 3 samples (defined below) in accordance with MIL-DTL-24308:

Visual examination

Shock

Vibration

Visual examination

Test sample: Each sample shall consist of a M24308/25 dash number assembled to the applicable pair of mated connectors with M24308/26-1 or 24308/26-2 attached.

Part number example: M24308/25 - 6 P

(Dash number from figure 1).

Finish

F - Cadmium, P - Passivated stainless steel, No suffix - zinc

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA - NA
DLA - CC

Review activities:
Army - AT, AV, CR-4, MI
Navy - AS, CG, MC, SH,
Air Force - 99

Preparing activity:
DLA - CC

(Project 5935-4249-09)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:12Z
Check the source to verify that this is the current version before use.