
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SCREW-LOCK ASSEMBLY, FEMALE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the assemblies described herein shall consist of this specification and the latest issue of MIL-C-24308.

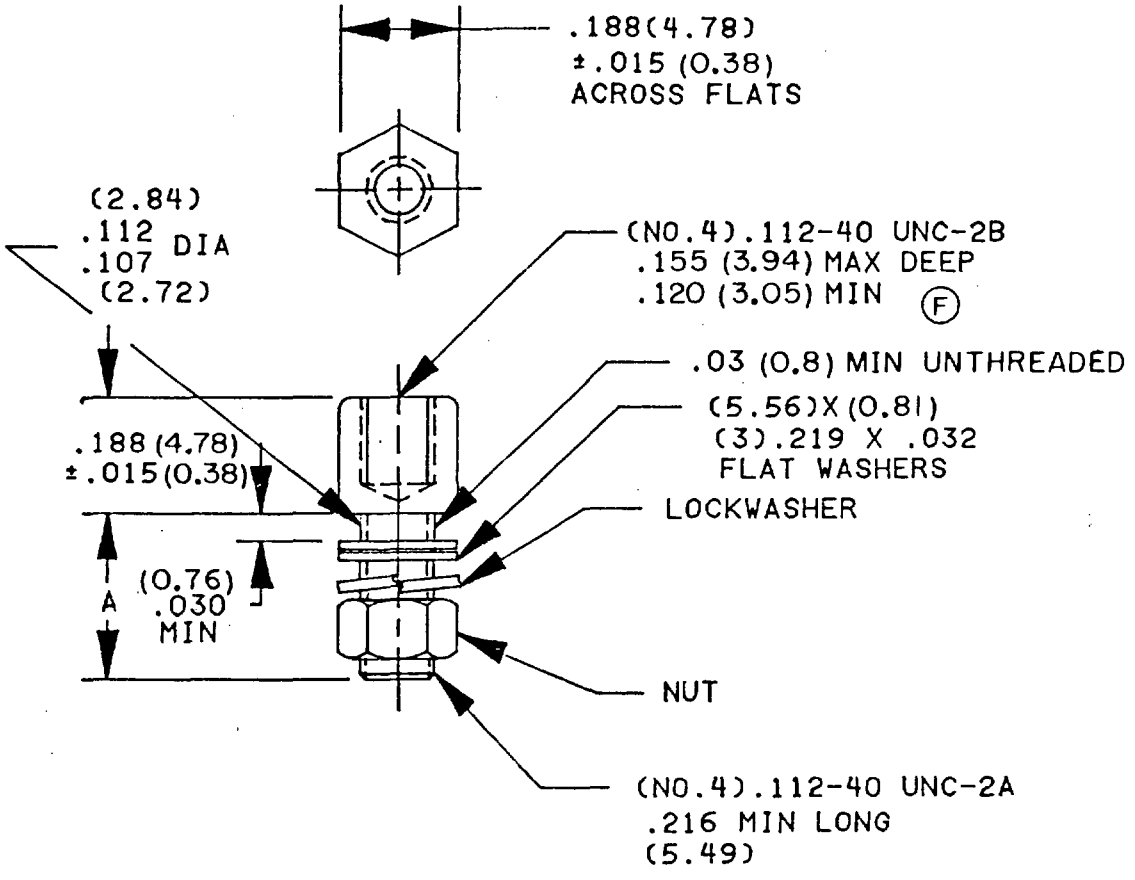

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only.
4. When a connector using the alternate method of securing the shell (tab type) is front mounted, one flat washer shall be used as a spacer between the mounting surface and the connector.

FIGURE 1. Dimensions and configuration.

Ⓕ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-01-07 12:13:32
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Cold rolled steel.

Finish: Yellow chromate over cadmium in accordance with QQ-P-416, or yellow chromate over zinc in accordance with QQ-Z-325 type II, class 3.

Qualification requirements: See MIL-C-24308/25.

Part number: M24308/26- (dash number from table I).

TABLE I. Dash number.

Dash no.	A ±.015
-1	.312
-2	.625

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AV, MI
Navy - AS
Air Force - 11, 99
DLA - ES

User activities:
Army - AT, ME
Navy - CG, MC

Preparing activity:
Navy - EC

Agent:
DLA -ES

(Project 5935-3606)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:13Z
Check the source to verify that this is the current version before use.