INCH-POUND

MIL-DTL-24308/26L
w/AMENDMENT 2
29 August 2012
SUPERSEDING
MIL-DTL-24308/26L
w/AMENDMENT 1
18 July 2011

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SCREW-LOCK ASSEMBLY, FEMALE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24308.

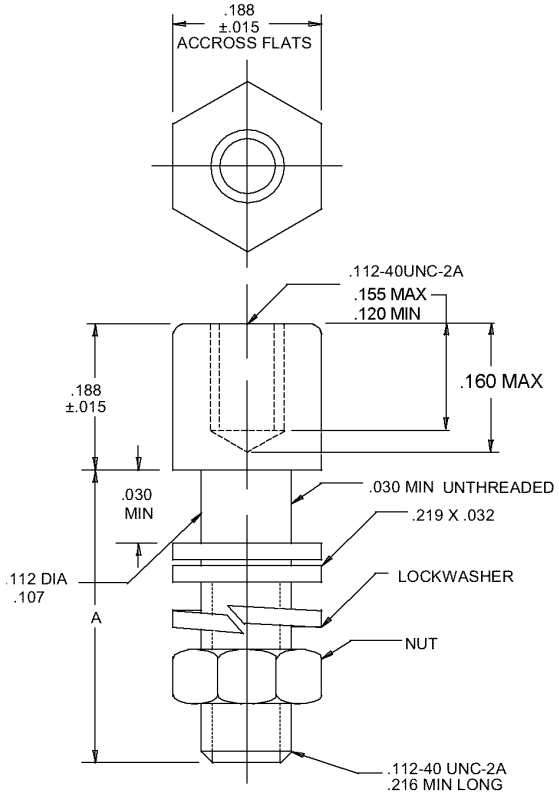

Inches	mm
.015	0.38
.030	0.76
.032	0.81
.107	2.72
.112	2.84
.120	3.05
.155	3.94
.188	4.78
.216	5.49
.219	5.56

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. When a connector using the alternate method of securing the shell (tab type) is front mounted, one flat washer shall be used as a spacer between the mounting surface and the connector.
4. Female screw-lock assembly supplied as an individual order, not by the pair.

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Cold rolled steel or corrosion resistant steel in accordance with ASTM A582/A582M.

Washer and lock washer: Cold rolled steel or corrosion resistant steel in accordance with ASTM A582/A582M or ASTM A666.

Finish: Cold rolled steel - Yellow chromate over cadmium in accordance with SAE AMS-QQ-P-416, or yellow chromate over zinc in accordance with ASTM B633 or zinc nickel alloy in accordance with ASTM B841 over a suitable underplate or Nickel fluorocarbon polymer over a suitable underplate or pure electrodeposited aluminum in accordance with MIL-DTL-83488.

Corrosion resistant steel - Shall be passivated in accordance with SAE AMS2700, type 6.

Jackpost installation torque: 5 inch pounds min.
6 inch-pounds max.

Jackpost mating torque: 4 inch-pounds max.

Qualification requirements: See MIL-DTL-24308/25.

Part or Identifying Number (PIN) example: M24308/26 - 1 F

Dash number, see table I

Finish

A = Pure electrodeposited aluminum.
F = Cadmium.
K = Zinc nickel.
P = Passivated stainless steel
T = Nickel fluorocarbon polymer.
Z or No suffix = zinc.
(See MIL-DTL-24308 for disposition of stock for “No suffix” finish)

TABLE I. Dash number.

Dash no.	A ±.015
-1	.312
-2	.625

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:13Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate where modifications from this amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-24308, this document references the following:

MIL-DTL-24308/25
MIL-DTL-83488
ASTM A582/A582M
ASTM A666
ASTM B633
ASTM B841
SAE AMS-QQ-P-416
SAE AMS2700

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA
DLA - CC

Review activities:
Army - AT, AV, CR4, MI
Navy - AS, CG, MC, SH
Air Force - 99

Preparing activity:
DLA - CC

(Project 5935-2012-201)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:13Z
Check the source to verify that this is the current version before use.