MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, INSULATION DISPLACEMENT, SOCKET CONTACTS, NONENVIRONMENTAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation. MIL-C-24308.


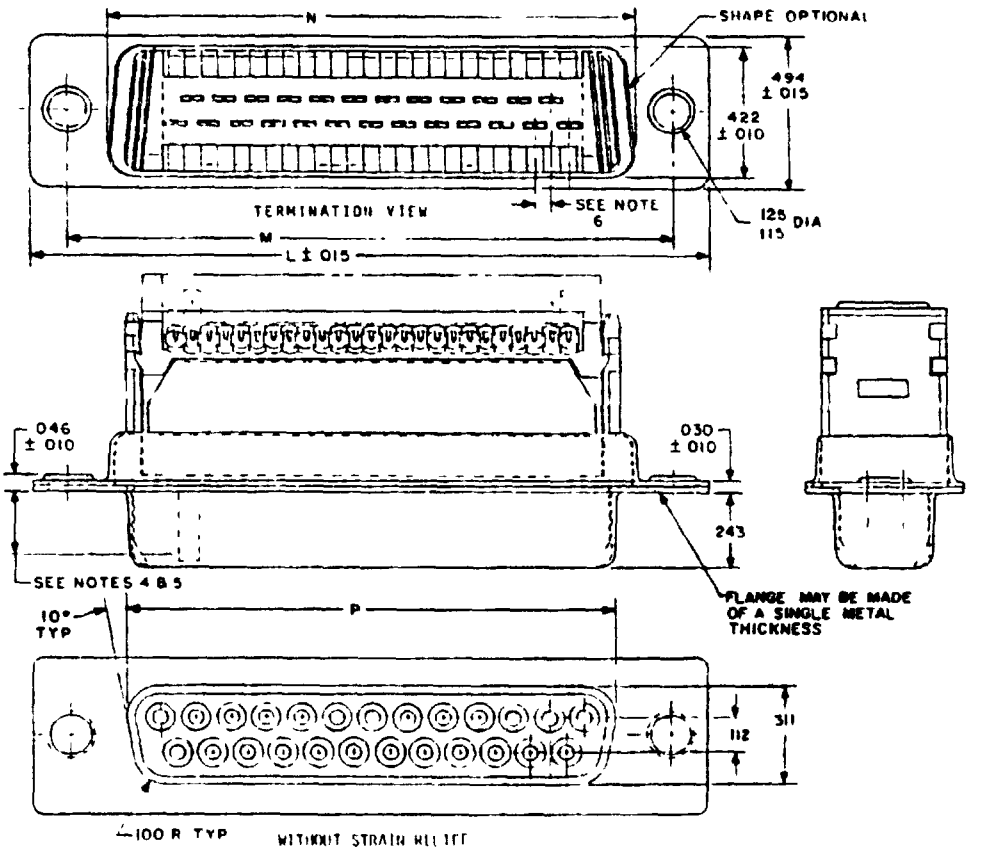



FIGURE 1. Configuration and dimensions

Ⓐ denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.



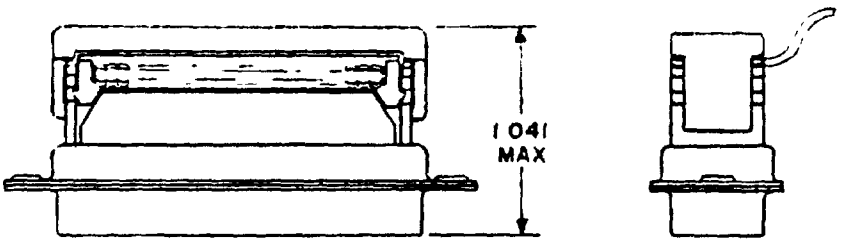

With strain relief

Inches	mm	Inches	mm	Inches	mm
.010	.25	.070	1.78	.243	6.17
.015	.38	.100	2.54	.311	7.90
.030	.76	112	2 84	.422	10.72
.046	1.17	.115	2.92	.494	12.55
.050	1.27	.125	3.18	1.030	26.16

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are ±.005 (.13 mm) for three place decimals and ±.01 (.25 mm) for two place decimals.
4. Use .041/.039 (1.04/.99 mm) diameter pin.
5. Depth of hole is .143 (3.63 mm) minimum as measured with a square ended test pin.
6. Interface - Round conductor flat cable on .050 (1.27 mm) centers.
7. Mating end of contact size 20.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction

Dimensions and configuration. See figure 1 and table I.

Mating connector: MIL-C-24308/3, MIL-C-24308/4, MIL-C-24308/7, MIL-C-24308/8, MIL-C-24308/9, MIL-C-24308/11, MIL-C-24308/13, MIL-C-24308/14, MIL-C-24308/17, MIL-C-24308/24, and MIL-C-24308/28

Conductor accommodation 28 AWG stranded round conductor flat cable with conductors on .050 inch (1.27 mm) centers.

Contact plating shall be in accordance with MIL-C-24308 for solder contacts

Contact retention. Not applicable

TABLE I. Dash numbers and characteristics.

Dash number	Shell size	Number of contacts	Dimensions 1/ L ± 015 (0.38)	M	N Max	P	Insert arrangement
-01	1	9	1.213 (30.81)	.984 (24.99)	769 (19 53)	.643 (16.33)	MS18273-1
-02	2	15	1 514 (39.14)	1.312 (33 32)	1.093 (27.76)	.971 (24.66)	MS18274-1
-03	3	25	2.088 (53 04)	1.852 (47.04)	1.635 (41.35)	1.511 (38.38)	MS18275-1
-04	4	37	2.729 (69 32)	2.500 (63.50)	2.282 (57.96)	2.159 (54.84)	MS18276-1

1/ Metric equivalents are given for general information only.

Materials

Contacts: Any suitably conductive copper based alloy.

Strain relief: Polyester in accordance with MIL-M-24319 or 300 series stainless steel.

Ⓐ PIN: Consists of the letter M, the basic number of the specification sheet, and a dash number compiled from the code.

PIN example: M24308/27 -01 F

Specification sheet number

Dash sheet number from table I

Finish: Cadmium = F
No suffix letter = cadmium or zinc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians.
Army - CR
Navy - EC
Air Force - 85
NASA - NA

Review activities.
Army - MI, MR
Navy - AS
Air Force - 11, 99
DLA - ES

User activities.
Army - AT, ME
Navy - CG, MC, OS

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5935-3672-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.