INCH-POUND

MIL-DTL-24308/27C
19 July 2000
SUPERSEDING
MIL-PRF-24308/27B
2 December 1996

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, INSULATION DISPLACEMENT, SOCKET CONTACTS, NONENVIRONMENTAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24308.


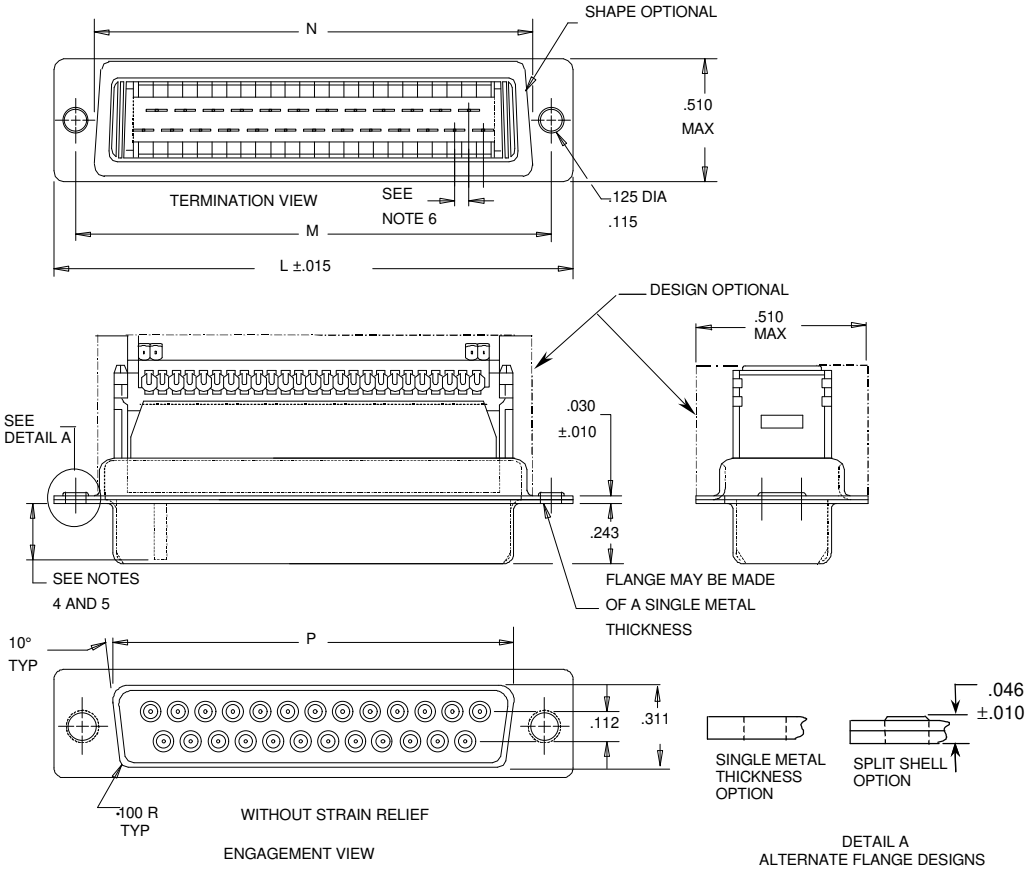



FIGURE 1. Configuration and dimensions.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.

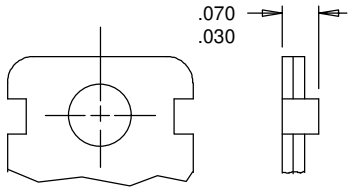

ALTERNATE METHOD
OF SECURING SHELL

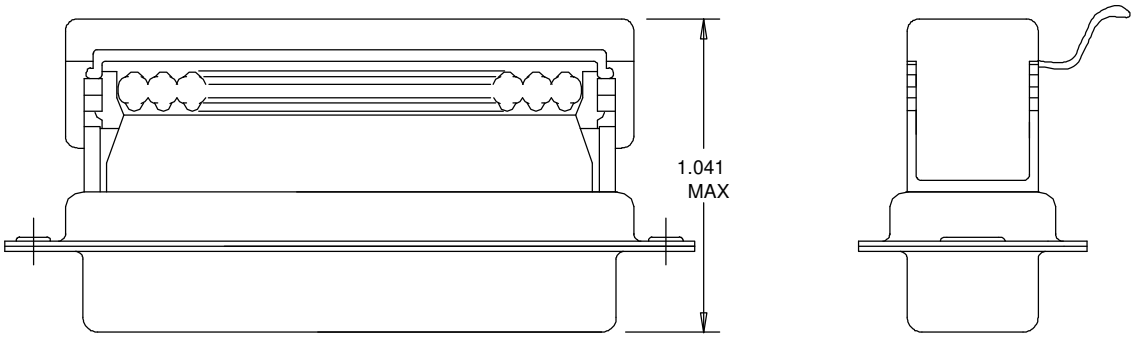

Inches	mm	Inches	mm	Inches	mm
.010	0.25	.070	1.78	.243	6.17
.015	0.38	.100	2.54	.311	7.90
.030	0.76	.112	2.84	.422	10.72
.046	1.17	.115	2.92	.494	12.55
.050	1.27	.125	3.18	1.030	26.16

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are ±.005 (0.13 mm) for three place decimals and ±.01 for two place decimals.
4. Use .041/.039 (1.04/0.99 mm) diameter pin.
5. Depth of hole is .143 (3.6.3 mm) minimum as measured with square ended test pin.
6. Interface - Round conductor flat cable on .050 (1.27 mm) centers.
7. Mating end of contact size 20.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

Mating connector: MIL-DTL-24308/3, MIL-DTL-2408/4, MIL-DTL-24308/7, MIL-DTL-24308/8, MIL-DTL-24308/9, MIL-DTL-24308/28.

Conductor accommodation: 28 AWG stranded round conductor flat cable with conductors on .050 inch (1.27 mm) centers.

Contact plating shall be in accordance with MIL-DTL-24308 for solder contacts.

Contact retention: Not applicable.

TABLE I. Dash numbers and characteristics.

Dash Number	Shell size	Number of contacts	Dimensions 1/				
			L ±.015 (0.38)	M	N Max	P	Insert arrangement 2/
-01	1	9	1.213 (30.81)	.984 (24.99)	.769 (19.53)	.643 (16.33)	A-1-1
-02	2	15	1.541 (39.14)	1.312 (33.32)	1.093 (27.76)	.971 (24.66)	A-2-1
-03	3	25	2.088 (53.04)	1.852 (47.04)	1.635 (41.35)	1.511 (38.38)	A-3-1
-04	4	37	2.729 (69.32)	2.500 (63.50)	2.282 (57.96)	2.159 (54.84)	A-4-1

1/ Metric equivalents are given for general information only.
2/ See MIL-DTL-24308 Appendix A for insert arrangements.

Materials:

Contacts: Any suitably conductive copper based alloy.

Strain relief: Polyester in accordance with MIL-M-24519 or 300 series stainless steel or an equivalent industry standard.

Part or Identification Number (PIN): Consists of the letter M, the basic number of the specification sheet, and a dash number compiled from the code.

PIN example: M24308/27 -01 F

Specification sheet number

Dash sheet number from table I

Finish: Cadmium = F
No suffix letter = Zinc

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA – NA
DLA - CC

Review activities:
Army - AT, AV, CR-4, MI
Navy - AS, CG, MC, SH
Air Force - 99

Preparing activity:
DLA - CC

(Project 5935-4249-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.