MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE,
POLARIZED SHELL, RACK AND PANEL, INSULATION
DISPLACEMENT, PIN CONTACT, NONENVIRONMENTAL, CLASS G

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-24308.


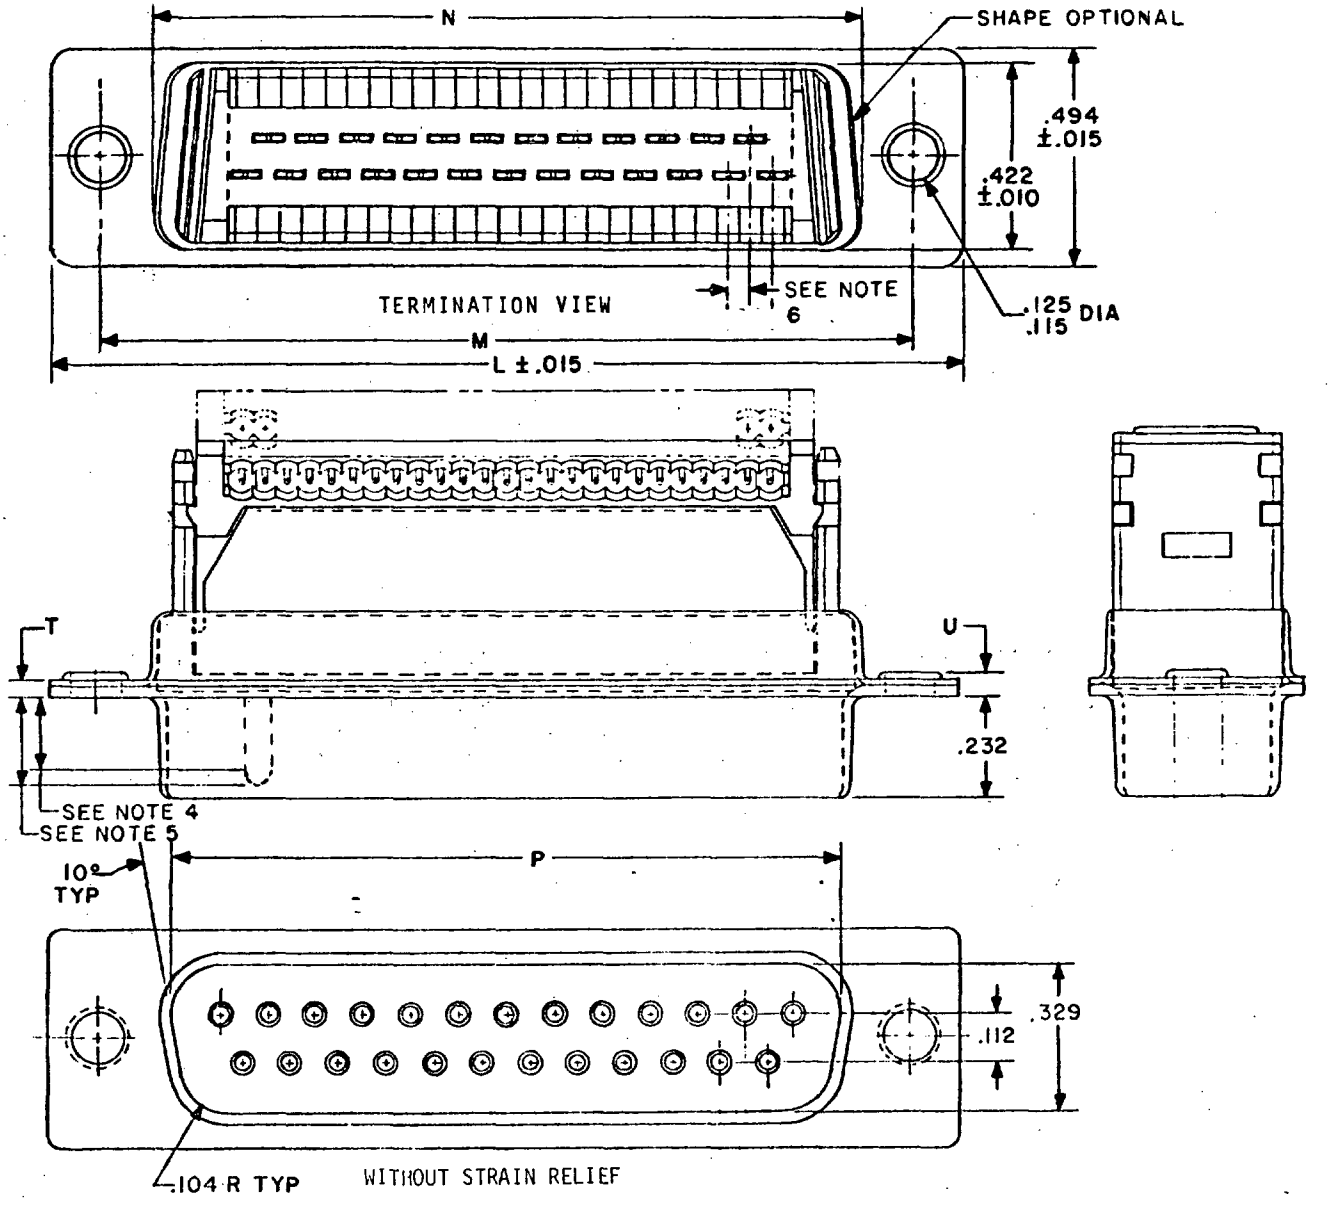



FIGURE 1. Configuration and dimensions.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.



ALTERNATE METHOD
OF SECURING SHELL

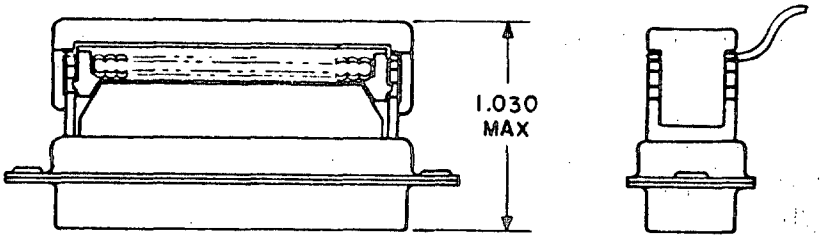

WITH STRAIN RELIEF

INCHES	MM	INCHES	MM	INCHES	MM
.010	.25	.100	2.54	.232	5.89
.015	.38	.104	2.64	.329	8.36
.030	.76	.112	2.84	.422	10.72
.050	1.27	.115	2.92	.494	12.55
.070	1.78	.125	3.18	1.030	26.16

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified tolerances are ±.005 (.13 mm) for three place decimals and ±.01 (.25 mm) for two place decimals.
4. Dimensions are .164 (4.17 mm) minimum full pin diameter, extension (shell sizes 1,2) and .155 (3.94 mm) minimum full pin diameter, extension (shell sizes 3,4).
5. Length for .164 and .155 pin diameter is .220 (5.59 mm) max.
6. Interface - Round conductor flat cable on .050 (1.27 mm) centers.
7. Mating end of contact size 20.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics.

Dash number	Shell size	Number of contacts	Dimensions 1/						Insert arrangement
			L ±.015 (.38)	M	N Max	P	U ±.010 (.25)	T ±.010 (.25)	
-01	1	9	1.213 (30.81)	.984 (24.99)	.769 (19.53)	.666 (16.91)	.046 (1.17)	.030 (.76)	MS18273-1
-02	2	15	1.541 (39.14)	1.312 (33.32)	1.093 27.76)	.994 (25.25)	.046 (1.17)	.030 (.76)	MS18274-1
-03	3	25	2.088 (53.04)	1.852 (47.04)	1.635 (41.53)	1.534 (38.96)	.064 (1.63)	.039 (.99)	MS18275-1
-04	4	37	2.729 (69.32)	2.500 (63.50)	2.282 (57.96)	2.182 (55.42)	.064 (1.63)	.039 (.99)	MS18276-1

1/ Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See FIGURE 1 and TABLE I.

Mating connector: MIL-C-24308/1, 2, 5, 6, 10, 12, 15, 16, 23, and 27.

Conductor accommodation: 28 AWG stranded round conductor flat cable with conductors on .050 inch centers.

Contact plating shall be in accordance with MIL-C-24308 for solder contacts.

Materials:

Contacts: Any suitably conductive copper based alloy.

Strain relief: Polyester in accordance with MIL-M-24519 or 300 series stainless steel.

Part number: M24308/28 (dash number from TABLE I).

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI, MR
Navy - AS
Air Force - 17, 99
DLA - ES

User activities:
Army - ME, AT
Navy - CG, MC, OS

Agent:
DLA - ES

Preparing activity:
Navy - EC
(Project 5935-3268-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-24308/28	Connectors, Electric, Rectangular, Miniature, Polarized Shell, Rack and Panel, Insulation Displacement, Pin Contact,

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
Nonenvironmental, Class G	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.