INCH-POUND

MIL-C-24308/28A
26 January 1989
SUPERSEDING
MIL-C-24308/28
20 May 1983

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, INSULATION DISPLACEMENT, PIN CONTACTS, NONENVIRONMENTAL, GLASS G

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-24308.


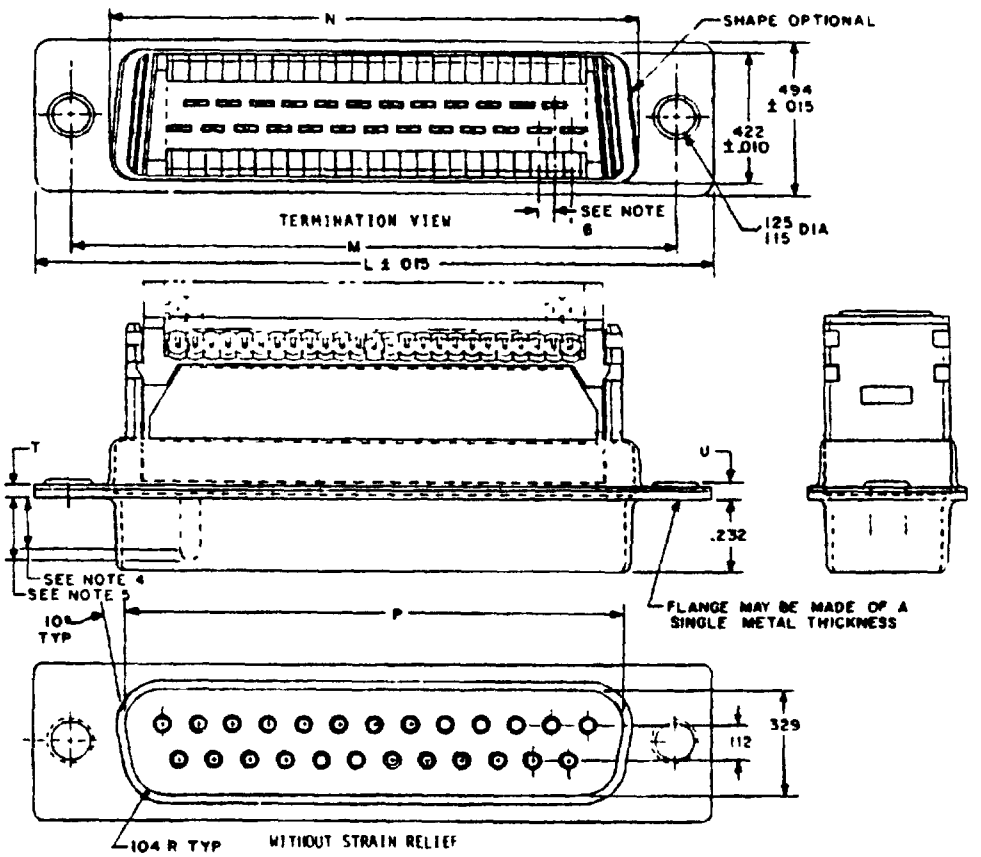



FIGURE 1 Configuration and dimensions
Ⓐ denotes changes

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.



ALTERNATE METHOD
OF SECURING SHELL

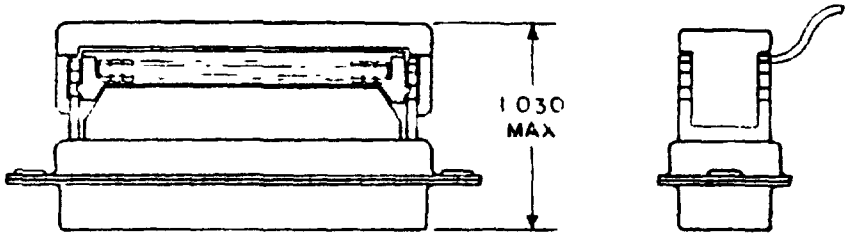

With strain relief

Inches	mm	Inches	mm	Inches	mm
.010	0.25	.100	2.54	.232	5.89
.015	0.38	.104	2.64	.329	8.36
.030	0.76	.112	2.84	.422	10.72
.050	1.27	.115	2.92	.494	12.55
.070	1.78	.125	3.18	1.030	26.16

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for information only
3. Unless otherwise specified tolerances are ±.005 (0.13 mm) for three place decimals and ±.01 (0.25 mm) for two place decimals
4. Dimensions are .164 (4.17 mm) minimum full pin diameter, extension (shell sizes 1,2) and .155 (3.94 mm) minimum full pin diameter, extension (shell sizes 3,4).
5. Length for .164 and .155 pin diameter is .220 (5.59 mm) maximum
6. Interface - Round conductor flat cable on .050 (1.27 mm) centers
7. Mating end of contact size 20

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction.

Dimensions and configuration. See figure 1 and table I.

Mating connector MIL-C-24308/1, MIL-C-24308/2, MIL-C-24308/5, MIL-C-24308/6, MIL-C-24308/10 MIL-C-24308/12, MIL-C-24308/15, MIL-C-24308/16, MIL-C-24308/23, and MIL-C-24308/27

Conductor accommodation 28 AWG stranded round conductor flat cable with conductors on .050 inch (1.27 mm) centers.

Contact plating shall be in accordance with MIL-C-24308 for solder contacts

TABLE I. Dash numbers and characteristics.

Dash number	Shell size	Number of contacts	Dimensions 1/ L ±.015 (0.38)	M	N Max	P	U ±.010 (0.25)	T ±.010 (0.25)	Insert arrangement
-01	1	9	1.213 (30.81)	.984 (24.99)	.769 (19.53)	.666 (16.91)	.046 (1.17)	.030 (0.76)	MS18273-1
-02	2	15	1.541 (39.14)	1.312 (33.32)	1.093 (27.76)	.994 (25.25)	.046 (1.17)	.030 (0.76)	MS18274-1
-03	3	25	2.088 (53.04)	1.852 (47.04)	1.635 (41.53)	1.534 (38.96)	.064 (1.70)	.039 (0.99)	MS18275-1
-04	4	37	2.729 (69.32)	2.500 (63.50)	2.282 (57.96)	2.182 (55.42)	.064 (1.70)	.039 (0.99)	MS18276-1

1/ Metric equivalents are given for general information only

Materials

Contacts Any suitably conductive copper based alloy.

Strain relief. Polyester in accordance with MIL-M-24519 or 300 series stainless steel.

Ⓐ PIN Consists of the letter M, the basic number of the specification sheet, and a dash number compiled from the code.

PIN example M24308/28 -01 F

Specification sheet number

Dash sheet number from table I

Finish. Cadmium = F
No suffix letter = cadmium or zinc

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians.
Army - CR
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Army - MI, MR
Navy - AS
Air Force - 11, 99
DLA - ES

User activities:
Army - AT, ME
Navy - CG, MC, OS

Preparing activity.
Navy - EC

Agent
DLA - ES

(Project 5935-3672-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.