INCH-POUND

MIL-DTL-24308/28D
25 June 2007
SUPERSEDING
MIL-DTL-24308/28C
19 July 2000

DETAIL SPECIFICATION SHEET

# CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, INSULATION DISPLACEMENT, PIN CONTACTS, NONENVIRONMENTAL, CLASS G

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24308.


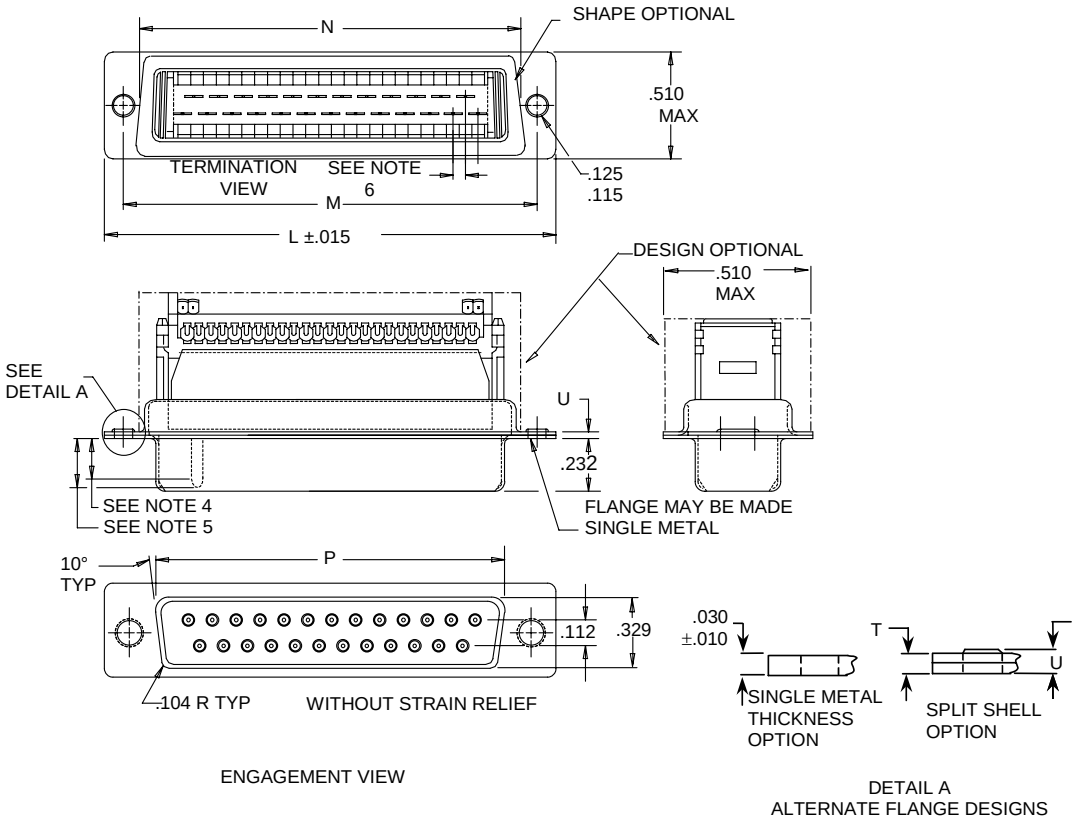



FIGURE 1. Configuration and dimensions.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.

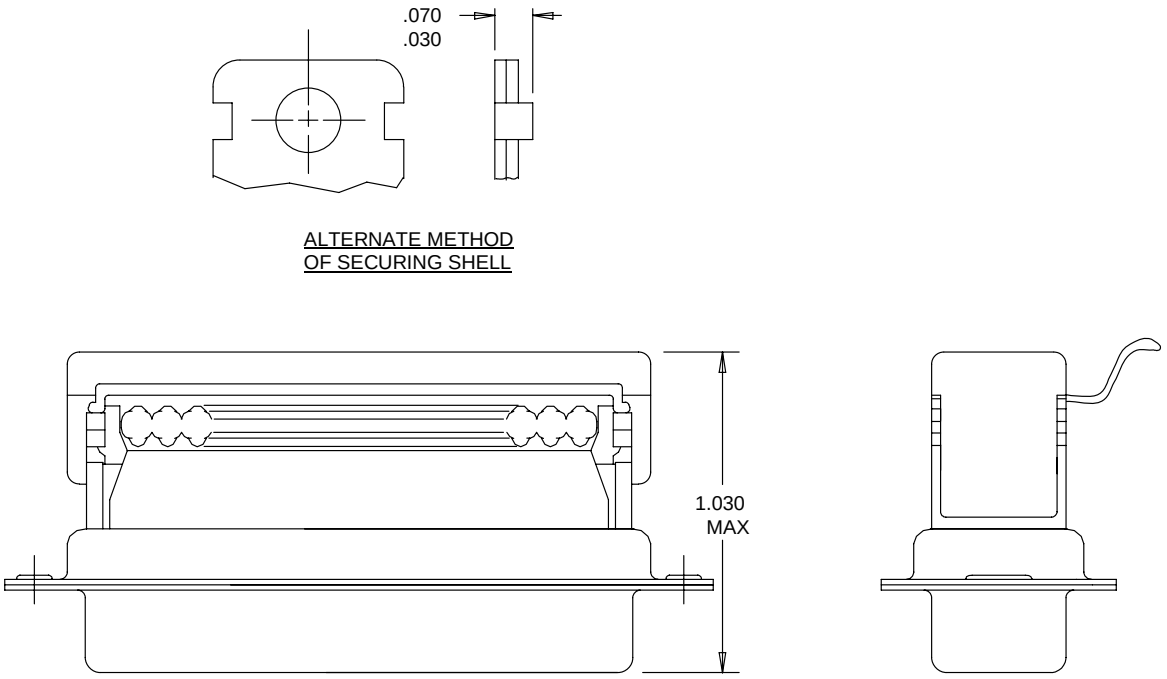


| Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|
| .010 | 0.25 | .100 | 2.54 | .232 | 5.89 |
| .015 | 0.38 | .104 | 2.64 | .329 | 8.36 |
| .030 | 0.76 | .112 | 2.84 | .422 | 10.72 |
| .050 | 1.27 | .115 | 2.92 | .494 | 12.55 |
| .070 | 1.78 | .125 | 3.18 | 1.030 | 26.16 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are ±.005 (0.13 mm) for three place decimals and ±.01 (0.25 mm) for two place decimals.
4. Dimensions are .164 (4.17 mm) minimum full pin diameter, extension (shell sizes 1 and 2) and .155 (3.94 mm) minimum full pin diameter, extension (shell sizes 3 and 4).
5. Length for .164 and .155 pin diameter is .220 (5.59 mm) maximum.
6. Interface - Round conductor flat cable on .050 (1.27 mm) centers.
7. Mating end of contact size 20.

FIGURE 1. Dimensions and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

Mating connector: MIL-DTL-24308/1, MIL-DTL-2408/2, MIL-DTL-24308/5, MIL-DTL-24308/6, MIL-DTL-24308/23, MIL-DTL-24308/27.

Conductor accommodation: 28 AWG stranded round conductor flat cable with conductors on .050 inch (1.27 mm) centers.

Contact plating shall be in accordance with MIL-DTL-24308 for solder contacts.

Contact retention: Not applicable.

TABLE I. Dash numbers and characteristics.

| Dash number | Shell size | Number of contacts | Dimensions 1/ | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| | | | L ±.015 (0.38) | M | N MAX | P | U ±.010 (0.25) | T ±.010 (0.25) | Insert arrangement 2/ |
| -01 | 1 | 9 | 1.213 (30.81) | .984 (24.99) | .769 (19.53) | .666 (16.91) | .046 (1.17) | .030 (0.76) | A-1-1 |
| -02 | 2 | 15 | 1.541 (39.14) | 1.312 (33.32) | 1.093 (27.76) | .994 (25.25) | .046 (1.17) | .030 (0.76) | A-2-1 |
| -03 | 3 | 25 | 2.088 (53.04) | 1.852 (47.04) | 1.635 (41.53) | 1.534 (38.96) | .064 (1.70) | .039 (0.99) | A-3-1 |
| -04 | 4 | 37 | 2.729 (69.32) | 2.500 (63.50) | 2.282 (57.96) | 2.182 (55.42) | .064 (1.70) | .039 (0.99) | A-4-1 |

1/ Metric equivalents are given for general information only.
2/ For insert arrangements see MIL-DTL-24308 Appendix A.

Materials:

Contacts: Any suitably conductive copper based alloy.

Strain relief: Polyester in accordance with ASTM D5927 or MIL-M-24519 or 300 series stainless steel or an equivalent industry standard.

Part or Identifying Number (PIN): Consists of the letter M, the basic number of the specification sheet, and a dash number compiled from the code.

PIN example: M24308/28 01 F

Specification sheet number

Dash sheet number from table I

Finish: Cadmium = F
Z = zinc (See MIL-DTL-24308 for disposition of stock for “No suffix” finish).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.

Reference documents. In addition to MIL-DTL-24308, this document references the following:

MIL-DTL-24308/1
MIL-DTL-24308/2
MIL-DTL-24308/5
MIL-DTL-24308/6
MIL-DTL-24308/23
MIL-DTL-24308/27
MIL-M-24519
ASTM D5927

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA - NA
DLA - CC

Review activities:
Army - AT, AV, CR4, MI
Navy - AS, CG, MC, SH
Air Force – 99

Preparing activity:
DLA - CC

(Project 5935-4813-000)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil .



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:14Z
Check the source to verify that this is the current version before use.