INCH-POUND

MIL-DTL-14631/2D
11 April 2000
SUPERSEDING
MIL-DTL-14631/2C
21 March 1997

DETAIL SPECIFICATION SHEET

PLATE, AUTOMOBILE, INDIVIDUAL, VICE PRESIDENT OF THE UNITED STATES

Inactive for new design after 8 January 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-14631 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

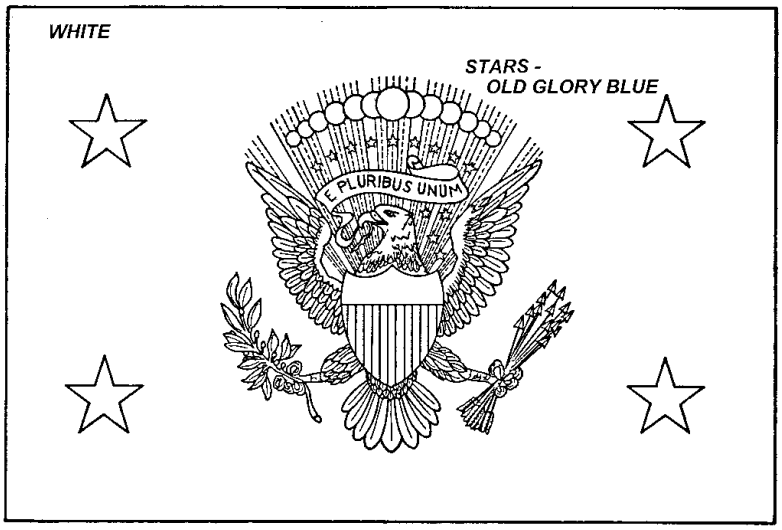

MATERIAL: Aluminum

DIMENSIONS:

BASE:
HEIGHT (overall): 6 inches ± 1/16 inch
WIDTH: 9 inches ± 1/16 inch
THICKNESS: 0.064 inch ± 0.003 inch
VICE PRESIDENTIAL EMBLEM (wing tip to wing tip): 3-1/2 inches
STARS (circumscribed diameter): 1 inch

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:32Z
Check the source to verify that this is the current version before use.

COLORS:	FED-STD-595	PMS✳
BASE: White	17925	-
VICE PRESIDENTIAL EMBLEM:		
Scarlet	11350	200
White	17925	-
Old Glory Blue	15056	280
Black	17038	-
Old Gold	13637	117
Silver Gray	16492	422
Dark Gray	-	425
Bronze	-	847
African Brown	10032	5185
Lemon Yellow	13591	114
Mosstone Green	-	377
Olive	14097	574
STARS: Old Glory Blue	15056	280

✳ See Note 1.

NOTES:

1. Colors shall conform to the chip numbers listed in FED-STD-595. Pantone Matching System (PMS) colors are shown for color matching in the absence of other standards. Placement of individual colors shall be in accordance with The Institute of Heraldry (TIOH) drawing number 4-4-95 and the color guide.

2. The size of the emblem and the stars shall be controlled by TIOH drawing number 4-4-95, which has been drawn full size (1-1).

3. The emblem shall be centered on the plate as illustrated by TIOH drawing number 4-4-95.

4. The stars shall be centered at the intersection of two vertical lines located 1-1/4 inches in from each side and two horizontal lines located as follows:

for top stars: 1-9/16 inch below the top edge of plate.

for bottom stars: 1-3/8 inch above the bottom edge of plate.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA-CT

(Project No. 8345-0231)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:32Z
Check the source to verify that this is the current version before use.