MIL-S-14630B
25 July 1977

Superseding
MIL-S-14630A
22 December 1969

MILITARY SPECIFICATIONS

STREAMER SET ATTACHMENT, CAMPAIGN AND WAR SERVICE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers two types of attachments for streamers.

1.2 Classification.- Streamer attachment sets shall be as specified (see 6.2).

Type I - 18 Hole

Type II - 15 Hole

2. APPLICABLE DOCUMENTS

2.1 Issue of documents.- The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-B-613	-	Brass, Leaded and Non-Leaded; Flat Products (Plate, Bar, Sheet and Strip)
QQ-I-666	-	Iron, Malleable, Ferritic, for Castings
QQ-N-290	-	Nickel Plating, (Electrodeposited)
PPP-B-636	-	Box, Shipping, Fiberboard
PPP-B-676	-	Boxes, Setup

STANDARDS

MILITARY

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: Director, The Institute of Heraldry, US Army, Cameron Station, Alexandria, VA 22314, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

/FSC 8345/

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:31Z
Check the source to verify that this is the current version before use.

MIL-STD-105 - Sampling Procedures and Table for Inspection by Attributes

MIL-STD-129 - Marking for Shipment and Storage

DRAWING

THE INSTITUTE OF HERALDRY

B-13-3 - Streamer Set Attachment, Campaign War Service (Miniature copy of drawing B-13-3, identified as figure 1, is attached for information purposes only.)

(Copies of specifications, standards and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 First article.- Unless otherwise specified (see 6.2) before production is commenced, a sample of the finished attachment shall be submitted or made available to the contracting officer or his authorized representative for inspection and tests as specified in 4.2. The approval of the first article authorizes the commencement of production but does not relieve the contractor of responsibility for compliance with all applicable provisions of this specification. The first article shall be manufactured in the same facilities to be used for the manufacture of the product items.

3.2 Materials.- Materials shall conform to the referenced specification and to the requirements specified herein.

3.2.1 Brass.- Brass for the header shall be sheet or strip conforming to QQ-B-613, annealed temper.

3.2.2 Iron castings, malleable.- Malleable iron castings shall conform to grade II (32510) of QQ-I-666.

3.2.3 Spring steel.- Spring steel shall be cold rolled, general purpose sheet or strip spring steel conforming to commercial flat spring quality of .70 - .80 percent carbon (AISIC-1074).

3.3 Design.- The streamer set attachment shall consist of a header and eighteen (18) swivel eye snaps for type I and (15) swivel eye snaps for type II. The design for the type I header shall be as specified on drawing B-13-3. The design of the type II header shall be an exact replica of the design on the Government furnished hub (see 3.7), from which the contractor's working

Source: https://assist.dla.mil -- Downloaded: 20261O-18T03:31Z
Check the source to verify that this is the current version before use.

dies shall be extracted. The contractor's dies shall be tooled and polished to remove any dents, nicks, scratches or other imperfections and the unornamented sections shall be smooth and polished.

3.4 Construction.- The construction of the streamer set attachment shall conform to the requirements specified herein and as shown on drawing B-13-3. The swivel eye spring snaps shall be attached to the header with the snap spring facing the center of the header. Except for the snap spring the snaps shall be fabricated from iron specified in 3.2.2. The snap spring shall be fabricated from spring steel specified in 3.2.3. The headers shall be made from brass specified in 3.2.1.

3.4.1 Stamping and trimming.- The header shall be stamped in a manner to insure a well defined die struck edge and accurately trimmed to the die struck edge. All edges shall be clean, smooth and free from burrs, drag and step.

3.5 Finish.-

3.5.1 Header.- Headers shall be nickel plated. The plating thickness shall be a minimum of 0.00025 inch thick.

3.5.2 Swivel eye spring snap.- The swivel eye spring snap shall be nickel plated with a minimum plating thickness of 0.00025 inch.

3.6 Marking.- In addition to any special marking required by the contract or order see (6.2), the manufacturer shall stamp his identification mark inconspicuously but legibly on the concave side of the header adjacent to the center hole.

3.7 Government loan property. Hubs for the type II header will be loaned by the government and shall be used for making the contractor's dies necessary for one contract or order. There are no hubs for the type I header. It shall be fabricated in accordance with Drawing B-13-3.

3.8 Workmanship.- The streamer set attachment shall be clean, well made and shall meet the acceptable quality levels established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility - Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:31Z
Check the source to verify that this is the current version before use.

purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.2 First article inspection.- When a first article is required, inspection of the first article shall be made for all provisions of this specification applicable to the end product examination.

4.3 Sampling for inspection and acceptance.- Sampling for inspection and testing shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.3.1 Component testing.- The quality assurance provisions for components and materials, except as otherwise required by this specification, shall be in accordance with applicable specifications and standards referenced herein. When there is a conflict in quality assurance provisions, this specification shall govern.

4.3.2 Certification of compliance.- Components and materials listed below may be accepted on the basis of a contractor's certification of compliance for chartacteristics indicated.

Component	Characteristic	Rqm't para
Header	Nickel plating and thickness	3.5.1
Swivel eye spring snap	Nickel plating	3.5.2

4.3.3 End item examination.- The defects found during examination shall be classified in accordance with 4.3.3.1 and 4.3.3.2. The lots shall be inspected in accordance with 4.3.3.3. The sample unit for these examinations shall be one streamer set attachment.

4.3.3.1 Examination of streamer set attachment for visual defects.- Defects so designated by an asterisk (*) shall be classified as major when seriously affecting serviceability or appearance and minor when affecting serviceability and appearance but not seriously.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:31Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	*	Minor
Finish of plated surfaces	Type of plating not as specified.	x	-	-
	Plating is not adherent, is not continuous, or is not uniform.....	x	-	-
	Area of no plating.....	x	-	-
	Dirt or foreign matter inbedded in finish.....	-	-	x
	Discolored; i.e., spots or stains.....	-	-	x
	Plating is scratched, pitted, blistered or otherwise impaired.....	x	-	-
	Unornamented section not smooth or not polished.....	-	*	-
Material and design	Not fabricated of specified material.....	x	-	-
	Design or shape altered; i.e., does not conform to Government hub or applicable drawing.....	x	-	-
	Significant detail missing, reduced or obliterated.....	x	-	-
	Not type specified.....	x	-	-
Construction and workmanship	Any component missing.....	x	-	-
	Sharp edge or burr.....	-	-	x
	Drag, step or rough edge.....	-	-	x
	Die struck edge not well defined.	-	*	-
	Any functioning component that is inoperative or requires undue force to operate.....	x	-	-
	Any forming operation omitted; e.g., not chamfered where required.....	x	-	-
	Warped, twisted, distorted, bent out of shape or otherwise impaired.....	-	*	-
	Any detail struck over, resulting in a double impression.....	-	*	-
Identification marking	Missing, illegible or not placed on the concave side of the header.....	-	-	x

4.3.3.2 Dimensional examination of streamer set attachment.- Any dimension that is not within the specified tolerances shall be classified as a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:31Z
Check the source to verify that this is the current version before use.

4.3.3.3 Inspection levels and acceptable quality levels (AQL's).- The inspection levels and the acceptable quality levels (AQL's) expressed in defects per hundred units shall be as follows:

	Inspection level	AQL Major	AQL Total
For defects applicable to 4.3.3.1	II	2.5	10.0
For defects applicable to 4.3.3.2	S-2	(one class)	4.0

4.3.4 Examination for count of streamer set attachments in intermediate containers.- Streamer set attachments packaged for shipment shall be examined to determine conformance with package markings and specified quantity. The sample unit for this examination shall be one box (interior package). Any box containing less than the specified or marked quantity of streamer set attachments shall be classified as a defect. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units. The lot size shall be the number of intermediate containers.

4.3.5 Examination of preparation for delivery requirements.- An examination shall be made to determine that applicable packaging, packing and marking requirements are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible or improper size, location sequence, or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as, incomplete closure of case liners, container flaps, loose strapping, inadequate sealing. Bulging or distortion of containers.
Content (exterior and interior)	Number per container is more or less than required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:31Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Each streamer set attachment, consisting of one header with fifteen, or eighteen swivel eye spring snaps attached, shall be placed in a snug-fitting, transparent polyethylene bag. The polyethylene film shall be a minimum of 0.0015 inch thick. All seams shall be affected by heat sealing. Prior to or during the heat sealing closure operation excess air within the bag shall be expelled. Each prepackaged attachment shall then be packaged in a snug-fitting set-up paperboard box conforming to variety 1, class A or B, style 1 of PPP-B-676. Closure shall be in accordance with the appendix of the box specification.

5.1.2 Level C. Each streamer set attachment shall be packaged to afford adequate protection against deterioration and damage from the supply source to the first receiving station. The supplier may use his standard practice when it meets these requirements.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- Streamer set attachments packaged as specified in 5.1 shall be packed in a snug - fitting fiberboard box conforming to either class weather resistant V3s, V3c or V4s of PPP-B-636. Closure shall be in accordance with the appendix of the applicable box specification. The weight of the contents of each shipping container shall not exceed 65 lbs.

5.2.2 Level B.- Streamer set attachments packaged in 5.1, shall be packed in a snug-fitting fiberboard box conforming to class Domestic, grade 275 of PPP-B-636. Closure shall be in accordance with appendix of the container specification. The weight of the contents of each shipping container shall not exceed 65 lbs.

5.2.3. Level C.- The streamer set attachments shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rates for such supplies. Containers shall be in accordance with the rules and regulations of the carriers applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract or purchase order, unit packages and shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:31Z
Check the source to verify that this is the current version before use.

5.3.1 Polyethylene bagged packages.- Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The white paper label shall contain the following information:

STOCK NUMBER
NOMENCLATURER'S NAME
MANUFACTURER'S NAME
CONTRACT NUMBER

6. NOTES

6.1 Intended use.- The streamer set attachment is intended to be used to display US decoration and campaign streamers. The type I header is to be used for units with over 150 streamers while the type II header is intended for use with 150 or less streamers.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) Type required (see 1.2).

(c) When a first article sample is not required (see 3.1).

(d) Marking required (see 3.6).

(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

Custodians:
Army - IH
Navy - SA
Air Force - 11
Review Activities:
Navy - MC
Air Force - 99
DLA - CT
Project No. 83450095

Preparing Activity:

The Institute of Heraldry,
United States Army

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:31Z
Check the source to verify that this is the current version before use.

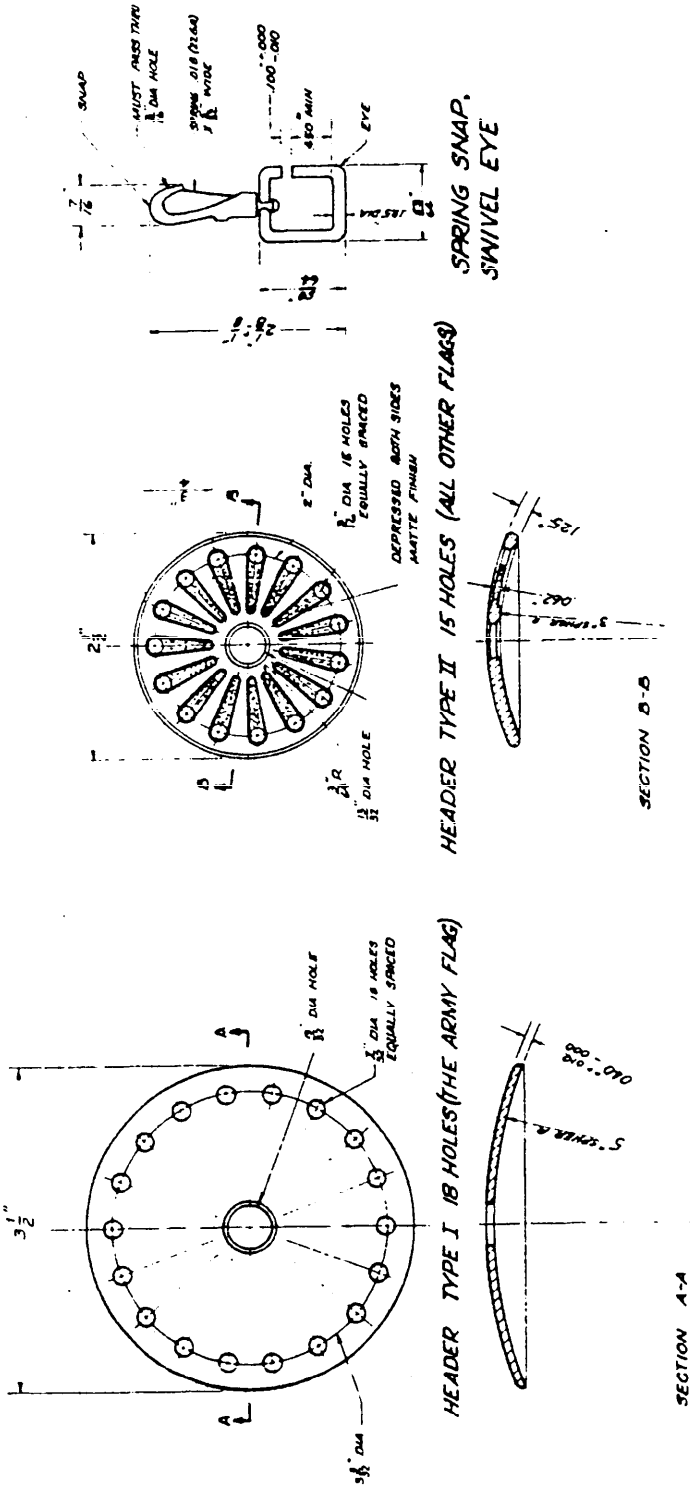


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-S-14630B Streamer Set Attachment, Campaign and War Service

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:31Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
THE INSTITUTE OF HERALDRY, US ARMY
CAMERON STATION
ALEXANDRIA, VA 22314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314

U.S. MAIL

DIRECTOR
THE INSTITUTE OF HERALDRY, US ARMY
CAMERON STATION
ALEXANDRIA, VA 22314

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:31Z
Check the source to verify that this is the current version before use.