
MILITARY SPECIFICATION SHEET

HEADSET-NONELECTRICAL, HEARING PROTECTIVE TYPE HIGH AMBIENT NOISE LEVELS, 105 125 dB M87819/3-01

This specification sheet is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the headset-nonelectrical described herein shall consist of this specification and the latest issue of MIL-H-87819

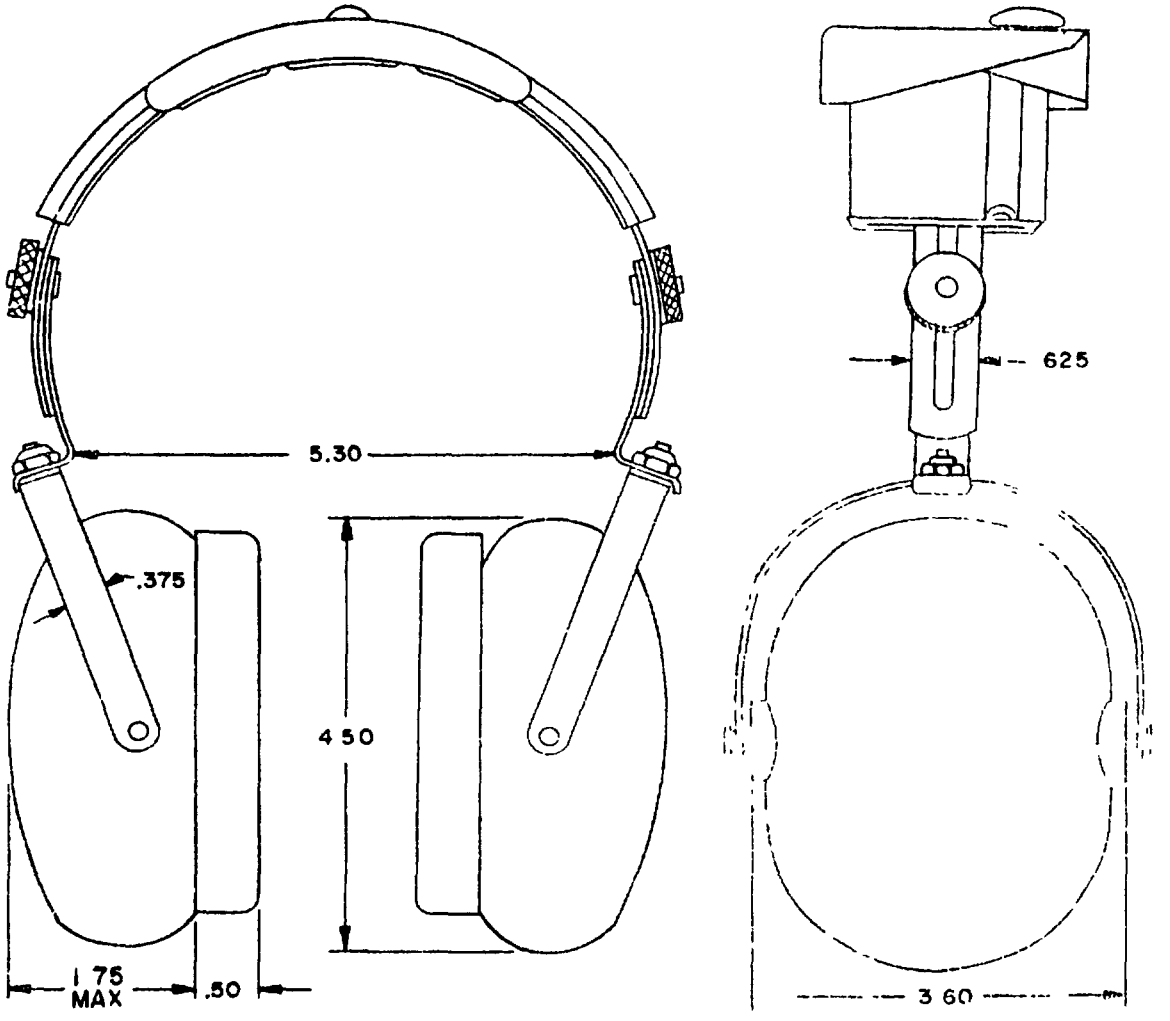


INCHES	MM
.50	12.7
.375	9.53
.625	15.88
1.68	42.7
1.75	44.45
3.60	91.4
4.50	114.3
5.30	135.0

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ±.015 (0.38 mm) and for two place decimals is ±.15 (3.8 mm).

FIGURE 1. Headset-microphone assembly M87819/3-01.


Source: https://assist.dla.mil -- Downloaded: 202640-23T12:23Z
Check the source to verify that this is the current version before use.

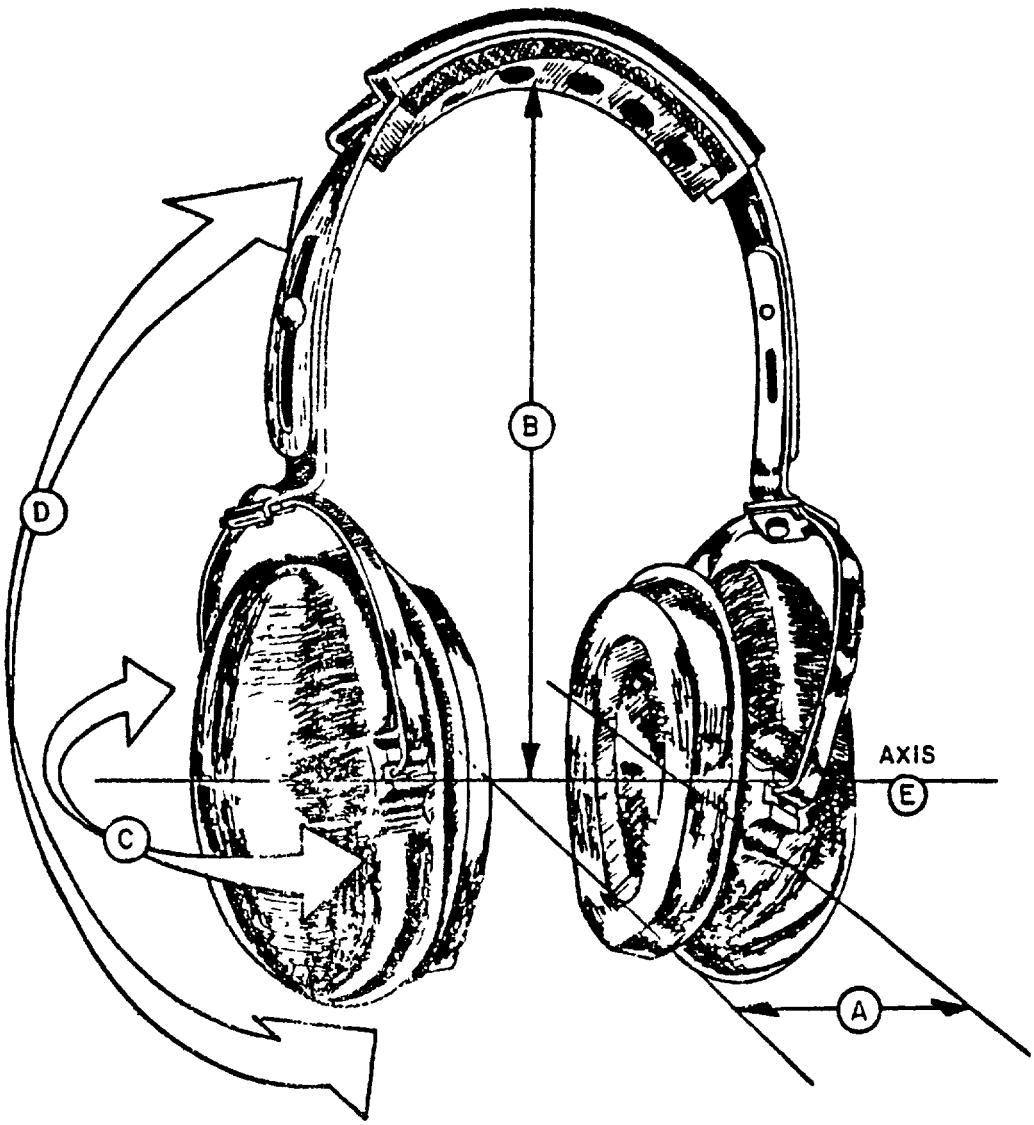

NOTES
1. Dimension "B" - 4.57 (116.1 , with dimension "A" set at 5.12 (130.0 mm), 5.59 (142.0 mm) with dimension "A" set at 6.10 (155.0 mm)
2. The force required to maintain a dimension of 6.10 (155.0 mm) shall not be greater than 3.5 pounds.
3. Angular deflection "C" as with respect to axis "E".
4. Angular deflection "D" - the earcup plane shall be freely movable between vertical and angle of 5° (top in - bottom in) at all settings of dimension "A".
5. Angular displacement from the neutral position shall not generate couples causing uneven earseal pressure.
6. The earcup shall be suspended by yokes (stirrup) from the headband to allow quick adjustment and suitable pressure to the head of the user.
7. Metric equivalents are in parentheses
8. Metric equivalents are given for general information only

FIGURE 2 Anthropometric dimensioning

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:23Z
Check the source to verify that this is the current version before use.

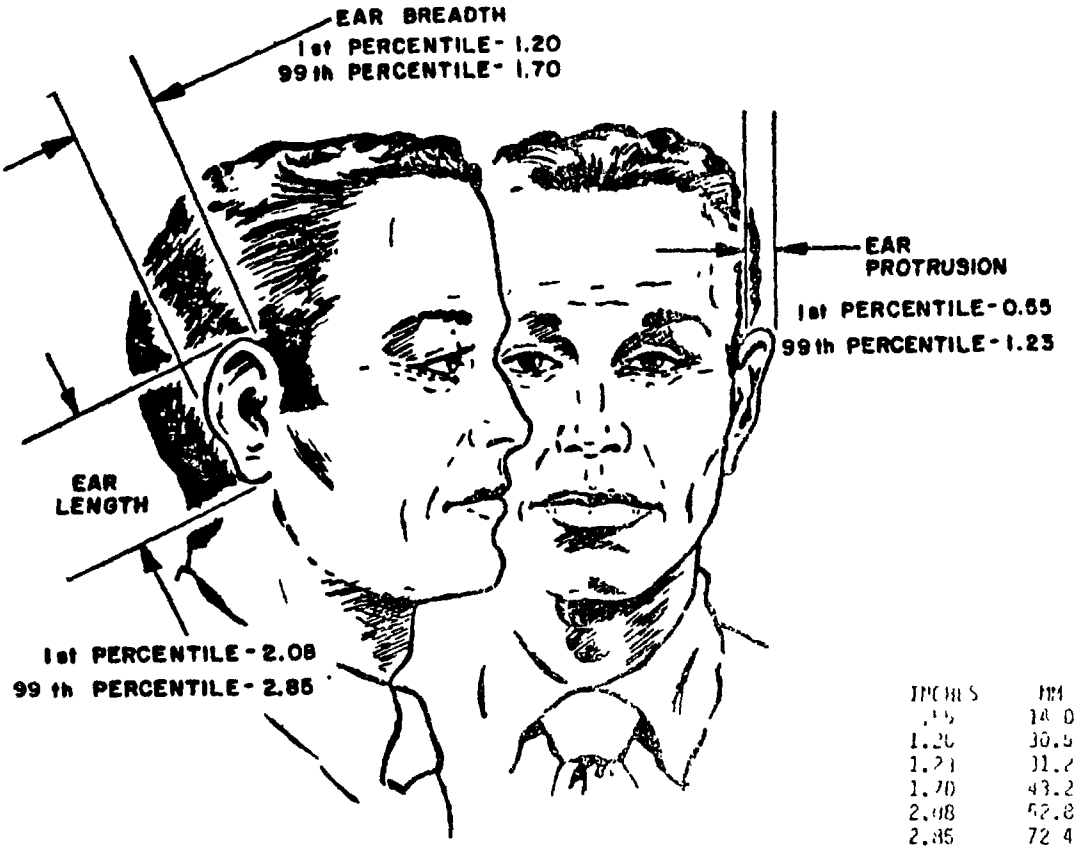



INCHES	MM
.55	14.0
1.20	30.5
1.23	31.2
1.70	43.2
2.08	52.8
2.85	72.4

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Earcushion shall comfortably accommodate 1st thru 99th percentile ear.

FIGURE 2. Anthropometric dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 202640-23T12:23Z
Check the source to verify that this is the current version before use.

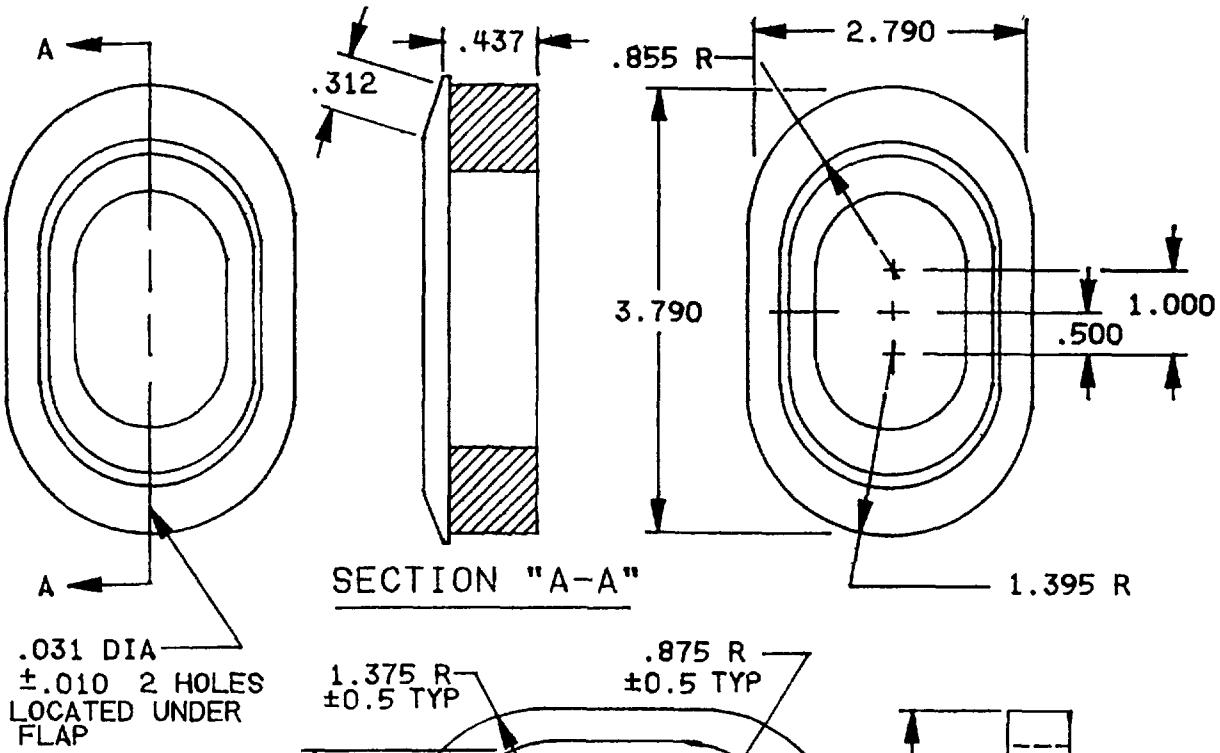

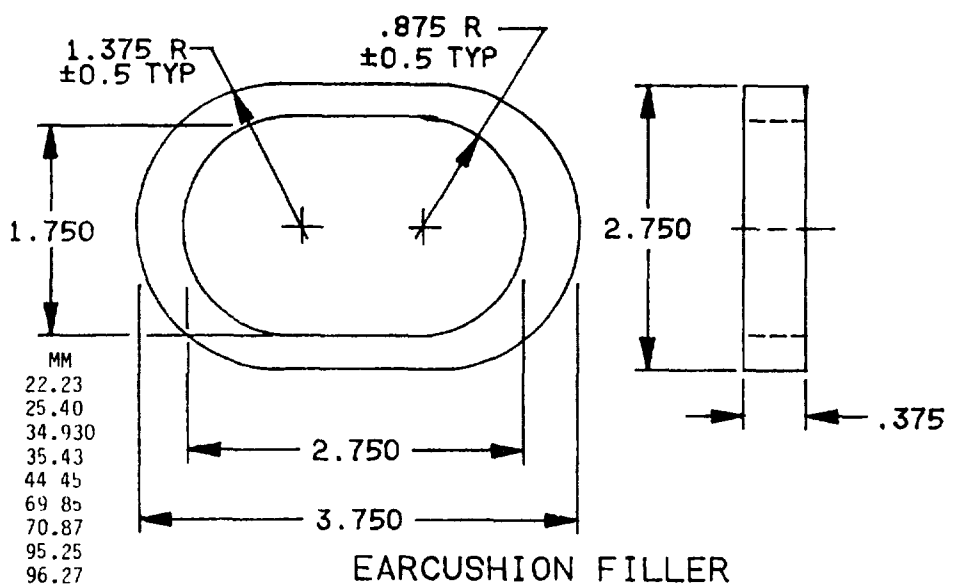

INCHES	MM	INCHES	MM
.002	0.05	.875	22.23
.010	0.25	1.000	25.40
.015	0.38	1.3752	34.930
.031	0.79	1.395	35.43
.312	7.92	1 750	44 45
.375	9.53	2.750	69 85
.437	11.10	2.790	70.87
.500	12.70	3.750	95.25
.855	21.72	3 790	96.27

NOTES
1. Earcushion cover material shall be 0.015 ±0.002 ether type, matte finish (both sides), color black as supplied by Stevens Molded Products, East Hampton, MA. part number MP-1880 or equal.
2. Earcushion filler material shall be a visco elastic type foam as supplied by Kees-Goebel part number T-38 or equal.
3. Metric equivalents are given for general information only.
4. Dimensions are in inches.
5. Unless otherwise specified, tolerance is ±.015 (0.38 mm).

FIGURE 3 Earcushion and filler construction.

Source: https://assist.dla.mil -- Downloaded: 202640-23T12:23Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:

Design and construction

Material: Headband material shall be a spring quality steel, type American Iron and Steel Institute No. 1050. The temper is annealed (dead soft), maximum hardness of Rockwell Hardness RB-88 in accordance with QQ-S-777. The bracket fabricated is then hardened to a Rockwell Hardness of RA 55-65. Then a phosphate coating heavy zinc base in accordance with DOD-P-16232 type Z, class 2 is applied.

Dimensions and configuration: See figure 1.

Headband pad: In accordance with AF drawing 66B 837 except overall length is 4.500 inches ±.125 in lieu of 4.75.

Headband cushion: In accordance with AF drawing 62B21711.

Anthropometric dimensioning: See figure 2.

Earcushion See figure 3.

Microphone element: Not applicable.

Earphone element Not applicable.

Plug assembly Not applicable.

Color. Lusterless black.

Weight. 1.75 lbs. maximum.

Performance: See table I and MIL-H-87819.

Part number: M87819/3-01.

TABLE I. Parameter applicability.

Inspection	Requirements paragraph	Test paragraph	Qualification tests	Group A tests	Group B tests	Group C tests
Group I						
Visual and mechanical inspection	3.3, 3.4, 3.6, 3.7	4.7.1	X	X		
Attenuation	3.5.4 3.5.3	4.7.3 4.7.2	X		X	
Group II						
Shock - drop	3.5.7	4.7.6	X		X	
Fungus	3.5.8	4.7.7	X			X
Vibration	3.5.9	4.7.8	X			X
Temperature	3.5.10	4.7.9	X			X
Group III						
Temperature shock	3.5.11	4.7.10	X			X
Humidity	3.5.12	4.7.11	X			X
Shock	3.5.13	4.7.12	X			X
Salt fog	3.5.14	4.7.13	X			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:23Z
Check the source to verify that this is the current version before use.

Custodian:
Air Force - 85

Review activity:
DLA - ES

Agent.
DLA - ES

Preparing activity:
Air Force - 85

(Project 5965-F185-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:23Z
Check the source to verify that this is the current version before use.