MILITARY SPECIFICATION SHEET

RESISTOR, FIXED, FILM, HIGH RELIABILITY, STYLE RSC50

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-R-87254.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for style RSC50, high reliability, film, fixed resistors.

1.2 Part or Identifying Number (PIN). The resistor covered by this specification shall be identified by the PIN which shall consist of the basic number of this specification and a coded number. The PIN shall be in the following form:

M8725401 — Detail specification

E49R90F — Coded number

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specification, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation (see 6.2).

SPECIFICATION

MILITARY

MIL-R-87254 - Resistors, Fixed, Film, High Reliability, Space Level Quality, General specification for.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to US Air Force Space Division, SD/ALM, PO Box 92960, Los Angeles, CA 90009-2960 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

DISTRIBUTION STATEMENT A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:22Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-R-87254 and as specified herein.

3.2 Design and construction. Resistors shall be of the design, construction, and physical dimensions specified on figure 1.

3.2.1 Characteristic. Style RSC50 is available in characteristics C, E, H, and J.

3.3 Power rating. The power rating shall be 0.05 watt.

3.4 Voltage rating. The continuous working voltage shall not exceed 200 volts.

3.5 Resistance. Minimum and maximum resistance values shall be as follows:

Minimum resistance:

Characteristic:

C, E, H, and J - - - - - - - - - - - 10.0 ohms.

Maximum resistance:


Characteristic:

C and E - - - - - - - - - - - - - - - 0.1 megohm.
H and J - - - - - - - - - - - - - - - 0.796 megohm.

3.6 Marking. Due to the limitations this style resistor shall be marked with the following minimum information:

042K: Date code, characteristic
49R9" Coded resistance value
FJ*" Tolerance, JAN marking, and manufacturer's code (see qualified products lists for manufacturers code symbols)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:22Z
Check the source to verify that this is the current version before use.

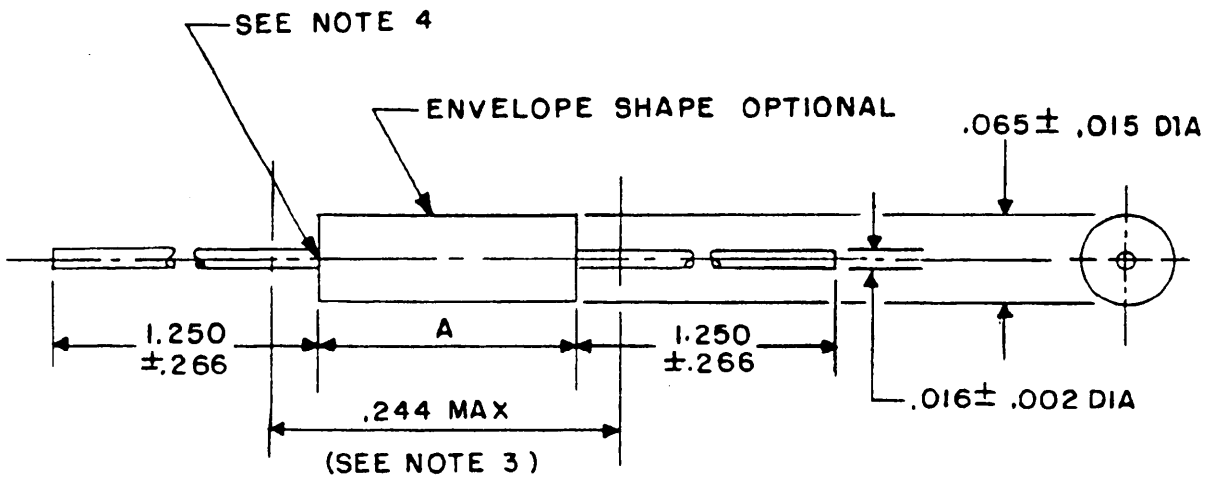

Characteristic	A ±.020
C and E	.180
H and H	.150

Inches	mm
.002	0.05
.015	0.38
.016	0.41
.020	0.51
.065	1.65
.150	3.81
.180	4.57
.244	6.20
.266	6.76
1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Maximum length is clean lead to clean lead.
4. The end of the body shall be that point at which the body diameter equals the nearest drill size larger than 250% of the nominal lead diameter.
5. Lead length for new design and tape and reel packaging shall be 1.00 +.625, -0.0 inch (25.4 +15.88, -0.0mm).

FIGURE 1. Style RSC50 resistors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:22Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection. Sampling and inspection shall be in accordance with MIL-R-87254.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-R-87254.

5.2 Marking. Package shall be marked with assigned PIN, manufacturers' identification name, logo, or CAGE number.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-R-87254 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 19
NASA - NA

Review activities:
Army - AR
Navy - AS, OS
Air Force - 17, 80, 85
DLA - ES

User activities:
Army - AT, AV, ME
Navy - CG, MC

Preparing activity:
Air Force - 19

Agent:
DLA - ES

(Project 5905-1106-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:22Z
Check the source to verify that this is the current version before use.