
FED. SUP CLASS
5930

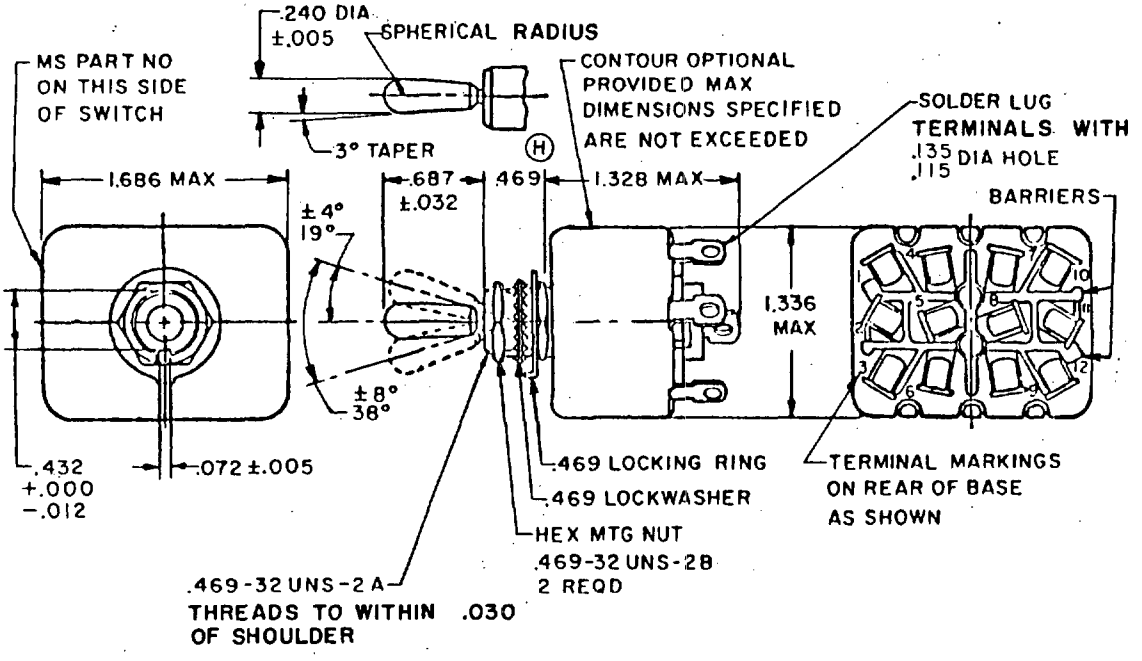


Ⓗ DENOTES CHANGE

| | | | |
|---|---|---|---|
| P.A AF - 85<br><br>Other Cust<br>Army - ER<br>Navy - AS | International interest | TITLE<br>SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SOLDER LUG, FOUR POLE, .469 MOUNTING BUSHING, 25 AMPERES | MILITARY STANDARD<br>MS14003 |
| Procurement Specification<br>MIL-S-8834 | | SUPERSEDES:<br>MS0014003(USAF) | PAGE 1 OF 4 |

DD FORM 1 MAY 73 672 *(Coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5930-1331-03

AMSC N/A DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

APPROVED 31 DEC 68 REVISED Ⓗ 30 SEP 86

User activities: Army - Navy - Air Force -

Review activities: Army - AR, MI Navy - EC Air Force - 11,17,99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:32Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR, MI
Navy - EC
Air Force - 11, 17, 99

User activities: Army -
Navy -
Air Force -

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Procurement Specification MIL-S-8834

Other Cust ARMY-ER NAVY-AS

P.A AF-85

International interest

SUPERSEDES: MS0014003(USAF)

TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SOLDER LUG, DOUBLE POLE, .469 MOUNTING BUSHING, 25 AMPERES

MILITARY STANDARD

MS14003

PAGE 2 OF 4

FED. SUP CLASS 5930

DETAIL REQUIREMENTS

| MS dash no | Circuit made between terminals as indicated with the toggle lever in these positions: | | | Current capacity amperes per pole 28 volts dc | | | Current capacity amperes per pole 115 volts 400 hertz ac | | | Current capacity amperes per pole 115 volts 60 hertz ac | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Opposite keyway side | Center position | Keyway side | Lamp load circuit | Resistive circuit | Inductive circuit | Lamp load circuit | Resistive circuit | Inductive circuit | Lamp load circuit | Resistive circuit | Inductive circuit |
| -212 | on 2-3, 5-6 8-9,11-12 | off | on 1-2, 4-5 7-8,10-11 | 7 | 25 | 15 | 7 | 25 | 15 | 7 | 20 | 15 |
| -222 | | none | off | | | | | | | | | |
| -232 | | | on 1-2, 4-5 7-8, 10-11 | | | | | | | | | |
| -242 | | off | none | | | | | | | | | |
| -262 | | none | | | | | | | | | | |
| -272 | mom-on 2-3, 5-6 8-9,11-12 | off | mom-on 1-2, 4-5 7-9, 10-11 | | | | | | | | | |
| -282 | none | | | | | | | | | | | |
| -292 | on 2-3, 5-6 8-9,11-12 | none | mom-off | | | | | | | | | |
| -302 | off | | mom-on 1-2,4-5 7-8, 10-11 | | | | | | | | | |
| -312 | on 2-3, 5-6 8-9,11-12 | off | | | | | | | | | | |

1/ Application information ratings at room temperature.

APPROVED 31 DEC 68 REVISED (H) FOR CHANGES SEE PAGE 1 & 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:32Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR, MI
Navy - EC
Air Force - 11,17,99

User activities: Army -
Navy -
Air Force -

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

P.A
AIR FORCE-85
Other Cust
ARMY-ER
NAVY-AS

International interest

Procurement Specification
MIL-S-8834

SUPERSEDES:
MS0014003(USAF)

TITLE
SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SOLDER LUG, FOUR POLE, .469 MOUNTING BUSHING, 25 AMPERES

MILITARY STANDARD

MS14003

PAGE 3 OF 4

FED. SUP CLASS
5930

DETAIL REQUIREMENTS

| MS dash no | Current capacity amperes per pole 1/ 250 volts 60 hertz ac | | | Current capacity amperes per pole 1/ 125 volts dc | | | Current capacity amperes per pole 1/ 250 volts dc | | | Life low current level switching 30 mV |
|---|---|---|---|---|---|---|---|---|---|---|
| | Lamp load circuit | Resistive circuit | Inductive circuit | Lamp load circuit | Resistive circuit | Inductive circuit | Lamp load circuit | Resistive circuit | Inductive circuit | |
| -212 | | | | | | | | | | |
| -222 | | | | | | | | | | |
| -232 | | | | | | | | | | |
| -242 | | | | | | | | | | |
| (H) -262 | | 10 | 7 | | 750 mA | | | 500 mA | | 10 mA |
| -272 | | | | | | | | | | |
| -272 | | | | | | | | | | |
| -282 | | | | | | | | | | |
| -292 | | | | | | | | | | |
| -302 | | | | | | | | | | |
| -312 | | | | | | | | | | |

1/ Application information ratings at room temperature.

APPROVED 31 DEC 68

REVISED (H) FOR CHANGES SEE PAGE 183

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:32Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

User activities: Army - Navy - Air Force -

Review activities: Army - AR, MI Navy - EC Air Force - 11, 17, 99



| INCHES | mm | INCHES | mm |
|---|---|---|---|
| .005 | 0.13 | .240 | 6.10 |
| .010 | 0.25 | .432 | 10.97 |
| .012 | 0.30 | .469 | 11.91 |
| .030 | 0.76 | .687 | 17.45 |
| .032 | 0.81 | 1.328 | 33.73 |
| .072 | 1.83 | 1.336 | 33.93 |
| .115 | 2.92 | 1.686 | 42.82 |
| .135 | 3.43 | | |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) on decimals and ±.5° on angles.
4. For hardware detail specifications see appendix of MIL-S-8834.
5. For design feature purposes, this standard takes precedence over acquisition ducuments referenced herein.
6. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.
7. Configuration of switch case housing, terminals and barrier; design optional providing maximum dimensions specified are not exceeded.
8. Weight: .175 pound maximum (79.4 grams).
9. Altitude requirement: 80,000 feet.
10. 115 V ac 60 hertz electrical endurance tests are to be performed at room temperature and pressure.
11. Contact Bounce: Shall not exceed 3.5 milliseconds.

APPROVED 31 Dec 68 REVISED (H) FOR CHANGES SEE PAGE 1 & 3

| | | | |
|---|---|---|---|
| P.A AF - 85<br>Other Cust<br>Army - ER<br>Navy - AS | International interest | TITLE<br>SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SOLDER LUG, FOUR POLE, .469 MOUNTING BUSHING, 25 AMPERES | MILITARY STANDARD<br>MS14003 |
| Procurement Specification<br>MIL-S-8834 | | SUPERSEDES:<br>MS0014003(USAF) | PAGE 4 OF 4 |

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:32Z
Check the source to verify that this is the current version before use.