
FED. SUP CLASS
6240

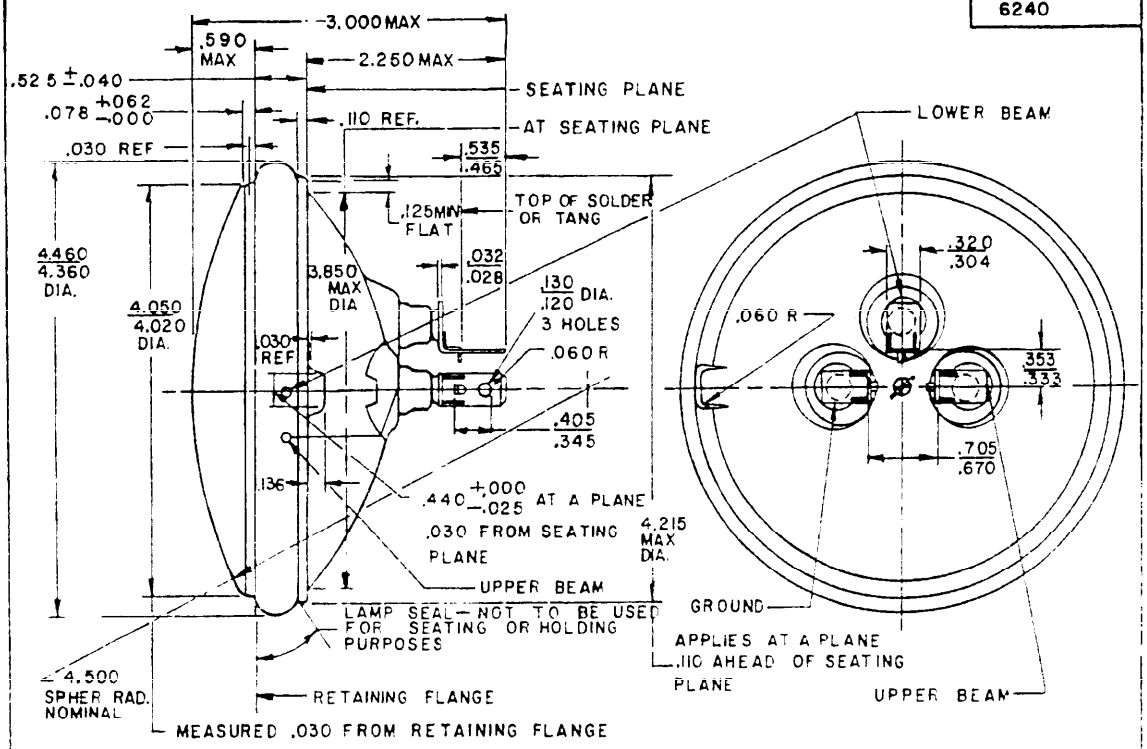

REVIEW ACTIVITY: ARMY: ME
USER ACTIVITY: NAVY—MC

NOTES:

1. TYPE III (MILITARY VEHICLE) OF PROCUREMENT SPECIFICATION.
2. PHOTOMETRIC TEST TOLERANCES: AIMING TOLERANCES OF ± 1/4 DEGREE AT EACH POSITION SPECIFIED IN TABLE. AN ADDITIONAL TOLERANCE OF ± 20% OF THE CANDLE POWER VALUE AT POINTS SPECIFIED IN TABLE I, FOR MANUFACTURING VARIATIONS.
3. THE LOWER BEAM, 55 WATT FILAMENT SHALL BE LOCATED ON THE FOCAL PLANE OF THE REFLECTOR. THE UPPER BEAM, 110 WATT FILAMENT SHALL BE PLACED SO THAT WHEN THE LOWER BEAM IS AIMED PROPERLY, THE UPPER BEAM WILL MEET THE PHOTOMETRIC REQUIREMENTS. "LAMPS TO BE PHOTOMETERED AT DESIGN (28) VOLTS."
4. MS DASH NUMBER CORRELATES WITH LAMP INDUSTRY TRADE NUMBER.
5. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±.010.
6. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, AND REFERENCED DOCUMENTS.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
9. MARKING SHALL CONSIST OF THE MS PART NUMBER, VOLTAGE RATING, AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

APPROVED 23 NOVEMBER 62 REVISED (A) 24 MAY 1968

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


(A) ENTIRE STANDARD REVISED—SHEET 2 ADDED

P.A. ARMY—AT Other Cus: NAVY—SH AF—85	TITLE LAMP, INCANDESCENT — SEALED BEAM, PAR 36 HEADLAMP, 3 CONTACT LUG TYPE	MILITARY STANDARD MS 18003
PROCUREMENT SPECIFICATION W-L-50	SUPERSEDES:	SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:12Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6420

PHOTOMETRIC TEST POINTS
SEE TABLE I FOR TEST POINT VALUES

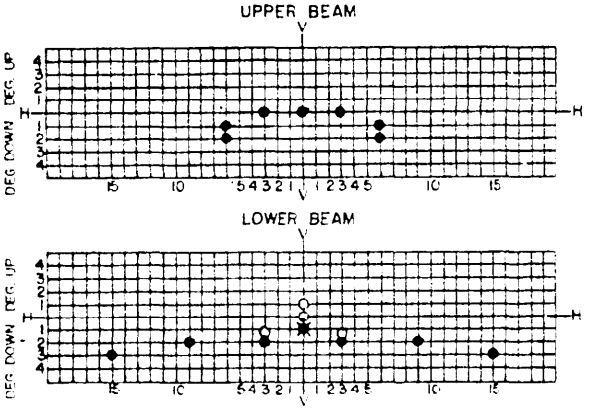

O-MAX CANDLEPOWER POINT ●-MIN CANDLEPOWER POINT
⊠ AIMING POINT – MAX AND MIN VALUE

TABLE I
PHOTOMETRIC TEST POINT VALUES
MEASURED 60 FEET FROM LAMP

UPPER BEAM		
POSITION, DEG	MAX C.P.	MIN C.P.
H–V	———	9000
H–3L TO 3R	———	7500
1D–6L TO 6R	———	5000
2D–6L TO 6R	———	5000

✱ LOWER BEAM		
POSITION, DEG	MAX C.P.	MIN C.P.
LINES–1U TO 90U	500	———
LINE H–L & R	750	———
1D–V	1000	1000
1-1/2 D–3R TO 3L	5000	———
2D–3R TO 3L	———	2000
2D–9R TO 9L	———	1000
3D–15R TO 15L	———	500

✱LOWER BEAM SHALL BE AIMED STRAIGHT AHEAD WITH THE TOP OF THE LOWER BEAM AIMED TO OBTAIN 1000 CANDLEPOWER AT 1° DOWN–VERTICAL

MS PART NO.	FORMER ARMY PART NO.	RATED VOLTS	RATED WATTS	DESIGN VOLTS	DESIGN AMPS	FILAMENT TYPE	RATED AVG. LAB LIFE	DESCRIPTION
MS 18003-4811	453128	24	110/55	28/28	393/196	CC-6/CC-6	400/500 HRS.	CLEAR GLASS LENS, PRISMATIC

APPROVED 23 NOV. 1962 REVISED Ⓐ ENTIRE STANDARD REVISED

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY–AT Other Cust NAVY–SH AF–85	TITLE LAMP, INCANDESCENT – SEALED BEAM, PAR 36 HEADLAMP, 3 CONTACT LUG TYPE	MILITARY STANDARD MS 18003
PROCUREMENT SPECIFICATION W-L-50	SUPERSEDES:	SHEET 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:12Z
Check the source to verify that this is the current version before use.