This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

DD FORM 672-1 (Revised coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROCUREMENT SPECIFICATION

P.A.
Other Cost

SUPERSEDES:


TITLE

NUT, WIRE RETAINED, SWIVEL
SAFETY WIRE HOLES, HOSE FITTING
AMS 5639 CRES STEEL

MILITARY STANDARD

MS18079 (WP)

SHEET 1 OF 2

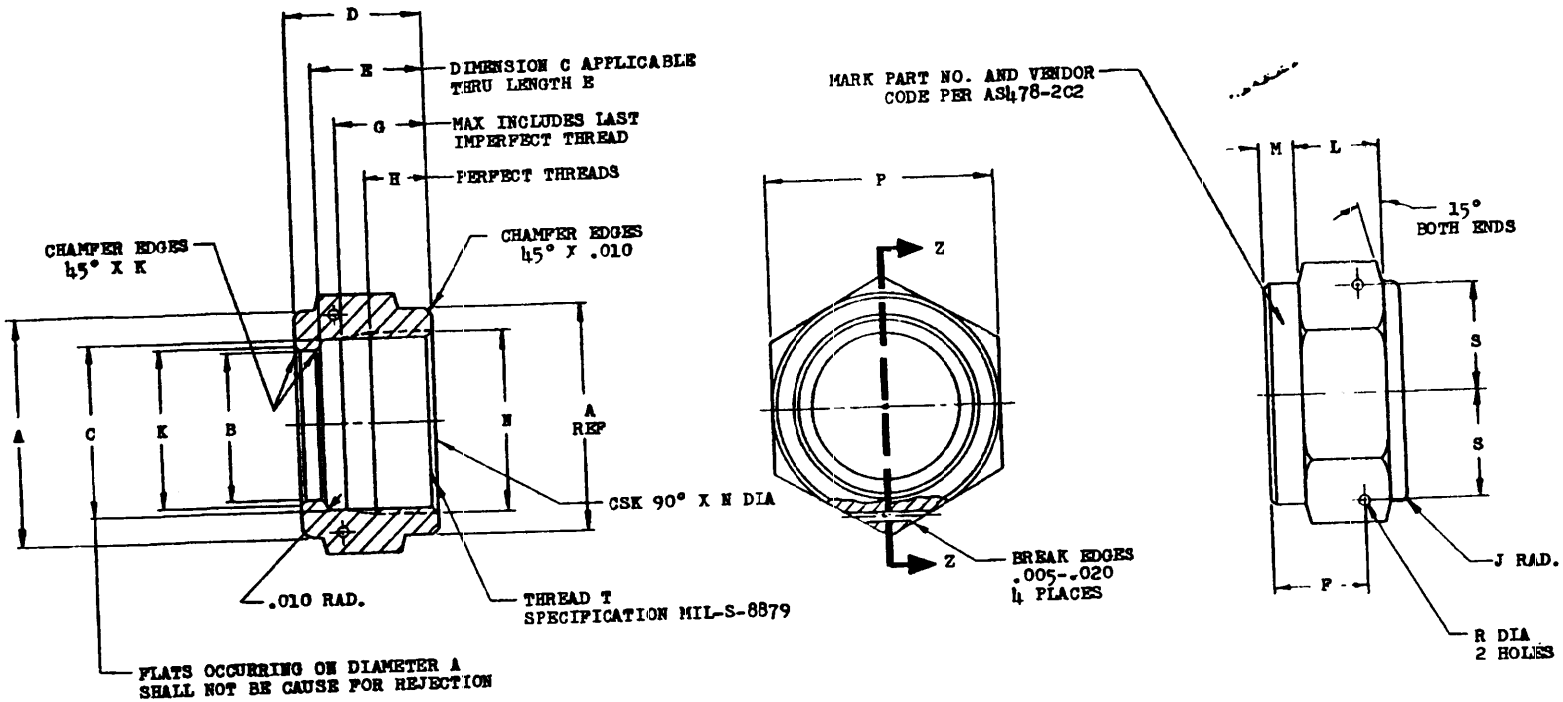

SECTION Z-Z

NOTES:
1. ALL DIAMETERS MUST BE CONCENTRIC WITH EACH OTHER WITHIN .005 TIR.
2. BREAK SHARP EDGES .005-.015 AND REMOVE ALL BURRS.
3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±5°
4. SURFACE ROUGHNESS: PER MIL-STD-10 NOT TO EXCEED 63/ UNLESS OTHERWISE SPECIFIED.
5. MATERIAL: CORROSION RESISTANT STEEL AMS 5639.
6. PASSIVATION: A.) DEGREASE.
   B.) IMMERSE FOR NOT LESS THAN 20 MINUTES IN A SOLUTION OF 1 VOLUME OF NITRIC ACID (SP GR 1.42) AND 9 VOLUMES OF WATER AT ROOM TEMPERATURE.

FED. SUP CLASS 4730

APPROVED 26 April 1965 REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:14Z
Check the source to verify that this is the current version before use.

This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. Other military activities are required to employ this standard where suitable.

PART NO.	A	B	C	D ±.008	E ±.005	F	G MAX	H	J	K ±.005	L
MS18079-03	.437 .427	.245 .242	.3413 .3340	.594	.506	.437	.407	.282	.031	.005	.375
MS18079-04	.562 .552	.308 .305	.3972 .3890	.609	.532	.454	.450	.300	.031	.005	.406
MS18079-05	.625 .615	.377 .374	.4589 .4510	.672	.579	.493	.481	.331	.031	.005	.484
MS18079-06	.687 .677	.443 .440	.5162 .5080	.719	.603	.500	.500	.333	.047	.010	.500
MS18079-08	.875 .865	.573 .570	.6974 .6890	.844	.723	.594	.563	.375	.047	.010	.578
MS18079-10	1.000 .990	.701 .698	.8141 .8050	.969	.817	.693	.675	.461	.047	.010	.688
MS18079-12	1.250 1.240	.837 .834	.9885 .9810	1.016	.868	.750	.719	.469	.062	.010	.750
MS18079-16	1.500 1.490	1.092 1.089	1.2385 1.2310	1.125	.962	.825	.813	.563	.078	.010	.766
MS18079-20	2.000 1.990	1.350 1.347	1.5515 1.5440	1.219	1.017	.853	.813	.563	.094	.010	.766
MS18079-24	2.250 2.240	1.620 1.617	1.8015 1.7940	1.406	1.170	.978	.911	.661	.094	.010	.875

PART NO.	M	N	P		R		S		THREAD T MIL-S-8879	WEIGHT MAX LBS
MS18079-03	.141	.375	.500		.045	±.003	.227		.3750-24 UNP-3B MOD	.013
MS18079-04	.125	.438	.563		.060		.260		.4375-20 UNP-3B MOD	.025
MS18079-05	.125	.500	.625		.070		.281		.5000-20 UNP-3B MOD	.032
MS18079-06	.156	.562	.688		.070		.313		.5625-18 UNP-3B MOD	.040
MS18079-08	.156	.750	.875	+.003 -.004	.070		.406	±.005	.7500-16 UNP-3B MOD	.063
MS18079-10	.172	.875	1.000		.070		.473		.8750-14 UNF-3B MOD	.091
MS18079-12	.125	1.062	1.250		.070	±.005	.594		1.0625-12 UNF-3B MOD	.158
MS18079-16	.219	1.312	1.500		.070		.741		1.3125-12 UNF-3B MOD	.220
MS18079-20	.312	1.625	2.000	±.016	.070		.963	±.010	1.6250-12 UNF-3B MOD	.505
MS18079-24	.359	1.875	2.250	±.020	.070		1.098		1.8750-12 UNF-3B MOD	.670

APPROVED 26 April 1965 REVISED

FED. SUP CLASS 4730

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

P.A. Other Cost

PROCUREMENT SPECIFICATION

SUPERSEDES:

TITLE NUT, WIRE RETAINED, SWIVEL SAFETY WIRE HOLES, HOSE FITTING AMS 5639 ORES STEEL

MILITARY STANDARD

MS18079 (WP)

SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:14Z
Check the source to verify that this is the current version before use.