THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-N-25027

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

PREPARING ACTIVITY DLA-IS
CUSTODIANS ARMY-AV NAVY-AS
AIR FORCE-11 DLA-
REVIEW 82.
USER CR MI
PROJECT NUMBER 5310-1947
DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited

MILITARY SPECIFICATION SHEET
TITLE NUT, SELF-LOCKING, PLATE CORNER LOW HEIGHT, STEEL 125 KSI Fbu 450°F

AMSC- N/A FSC 5310

SPECIFICATION SHEET NUMBER
MS21055 1 FEB 94 REV G
SUPERSEDING MS21055 F 30 SEPT 87 (SEE NOTE 5)


INCH-POUND


Page 1 of 3

Form Approved OMB No 0704-0188

Ⓖ DENOTES CHANGE(S)

CONFIGURATION OF NUT OPTIONAL WITHIN THE LIMITATIONS IMPOSED BY DIMENSIONS AND REQUIREMENTS AS SPECIFIED HEREIN

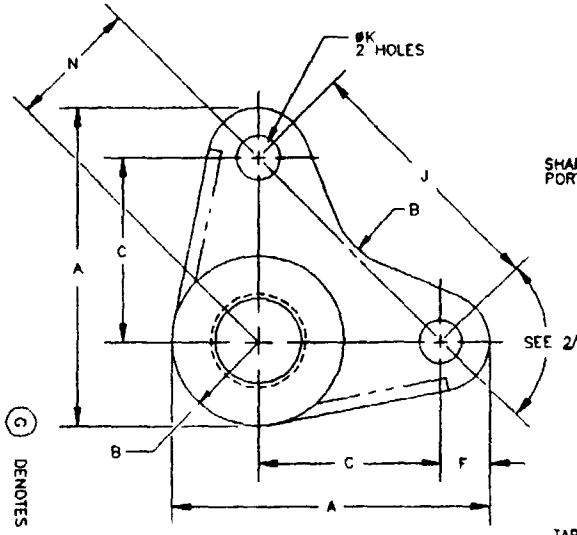

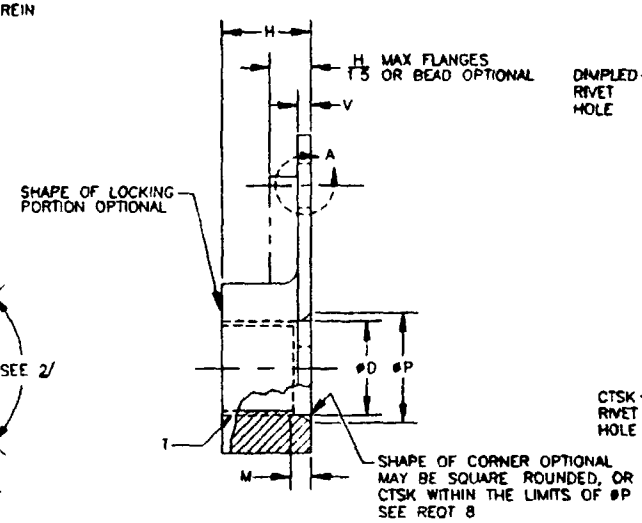

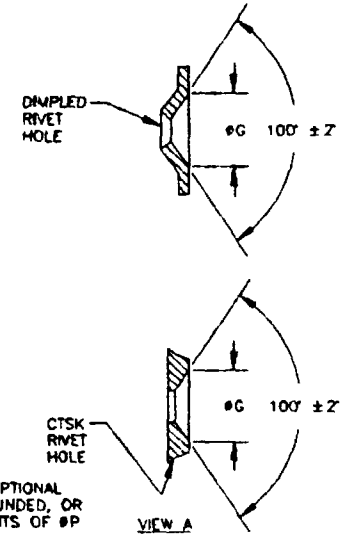


TABLE I DASH NUMBERS AND DIMENSIONS

DASH NUMBERS				T THREAD SIZES	A	B		C	øD	F	øG	1/ H	2/ J	3/ øK	M	N	øP	V	AXIAL STRENGTH	WEIGHT
PLAIN RIVET HOLES		COUNTERSUNK OR DIMPLED RIVET HOLES																		
NON-DRY FILM LUBRICANT	DRY FILM LUBRICANT	NON-DRY FILM LUBRICANT	DRY FILM LUBRICANT		MAX	MAX	MIN	± 005	MIN	MIN	± 010	MAX	± 002	+ 005 - 000	MIN	MAX	MAX	MAX	LBS/MIN	LBS/100
-04	L04	-04K	L04K	112-40 UNJC-3B	637	120	105	344	—	100	200	143	486	098	—	270	166	047	750	20
-06	L06	-06K	L06K	138-32 UNJC-3B	637	133	108	344	—	100	200	171	486	098	—	270	206	047	1 130	25
-08	L08	-08K	L08K	164-32 UNJC-3B	637	149	125	344	166	100	200	250	486	098	—	270	248	047	1 720	28
-3	L3	-3K	L3K	190-32 UNJF-3B	653	164	145	344	194	100	200	250	486	098	062	270	274	047	2 460	29
-4	L4	-4K	L4K	250-28 UNJF-3B	852	207	185	500	254	100	200	281	707	098	062	383	344	055	4 580	58
-5	L5	-5K	L5K	3125-24 UNJF-3B	914	248	216	500	317	125	230	328	707	130	062	383	417	065	7 390	85
-6	L6	—	—	375-24 UNJF-3B	968	307	290	500	379	125	230	344	707	130	062	383	505	075	11 450	1 31
-7	L7	—	—	4375-20 UNJF-3B	1 101	363	340	562	442	156	230	390	795	161	062	427	602	085	15 450	1 84
-8	L8	—	—	500-20 UNJF-3B	1 234	437	398	625	521	156	230	609	884	161	062	479	640	115	21,110	4 80
-10	L10	—	—	625-18 UNJF-3B	1 437	505	482	750	646	156	230	785	1 061	161	062	574	756	115	34 130	8 60

1/ MINIMUM "H" NOT SPECIFIED, LIMITED ONLY BY STRENGTH REQUIREMENTS OF THE SPECIFICATION
2/ CENTER OF THE TAPPED HOLE SHALL NOT DEVIATE IN ANY DIRECTION FROM THE CENTER OF THE PLATE NUT AS DETERMINED BY THE RIVET HOLES BY MORE THAN 005
3/ DIMPLED RIVET HOLE TOLERANCE FOR "øK" IS + 015 - 000

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:25Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-N-25027

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved
OMB No 0704-0188

REQUIREMENTS

(G) 1 MATERIAL CARBON STEEL, COMPOSITIONS 1035 (UNS G10350) 1040 (UNS G10400), AND 1050 (UNS G10500) IN ACCORDANCE WITH ASTM A827 OR QQ-S-700 1042 (UNS G10420) IN ACCORDANCE WITH ASTM A29 ALLOY STEEL, GRADES 4130 (UNS G41300), 4340 (UNS G43400) AND 8740 (UNS G87400) IN ACCORDANCE WITH ASTM A29

2 FINISH CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416 TYPE II CLASS 2 FOR DRY FILM LUBRICATED NUTS THE TYPE AND CLASS ARE OPTIONAL IF THE NUTS MEET THE SALT SPRAY REQUIREMENTS OF QQ-P-416 TYPE II

3 DIMENSIONING AND TOLERANCING DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M

4 HARDNESS 49 HRC MAX

5 THREADS THREADS PER LUBRICATION IN ACCORDANCE WITH MIL-S-8879

6 SURFACE TEXTURE SURFACE TEXTURE UNLESS OTHERWISE SPECIFIED SHALL NOT EXCEED 125 MICROINCHES, IN ACCORDANCE WITH ANSI/ASME B46 1

7 LUBRICANT DRY FILM LUBRICANT APPROVED IN ACCORDANCE MIL-N-25027 NON-DRY FILM LUBRICANTS SHALL BE SOLUBLE IN THE CLEANER SPECIFIED IN MIL-S-8802

(G) 8 EDGES BREAK ALL SHARP EDGES AND REMOVE ALL BURRS

9 COUNTERBORE/COUNTERSINK ON SIZE 164 AND LARGER COUNTERBORE THREAD "D" DIAMETER X 062 DEEP MINIMUM THREAD RELIEF ON SIZE 138 AND SMALLER COUNTERSINK TO "øP" WITHIN THE LIMITS OF D P AND M

10 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS21055L4K
- L4K — DASH NUMBER
- MS21055 — BASIC MS NUMBER

MS21055L4K INDICATES NUT SELF-LOCKING PLATE CORNER LOW HEIGHT ALLOY STEEL 125 KSI Ftu, 450° F 250-28 UNJF-3B DRY FILM LUBRICANT COUNTERSUNK OR DIMPLED HOLES

NOTES

1 ALL DIMENSIONS ARE IN INCHES

2 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

3 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPAECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

4 DESIGN AND USAGE LIMITATIONS THESE NUTS ARE DESIGNED TO DEVELOP THE TENSILE STRENGTH OF BOLTS AND SCREWS WITH AN ULTIMATE TENSILE STRENGTH OF 125 KSI BASED ON THE CROSS SECTION AREA AT THE BASIC ROOT DIAMETER OF THE THREADS THESE NUTS ARE DESIGNED TO BE USED ON 3A EXTERNAL THREADS THES NUTS SHALL BE USED IN ACCORDANCE WITH THE LIMITATIONS OF MS33588 ONLY NUTS FOR WHICH THESE ARE QUALIFIED PRODUCTS LISTED ON QPL 25027 SHALL BE USED

5 MS21055 SUPERSEDES NAS684 AND NAS1027 IN PART

PREPARING ACTIVITY DLA-IS CUSTODIANS ARMY - AV NAVY - AS AIR FORCE - 11 DLA - REVIEW 82 USER CR MI PROJECT NUMBER 5310-1947	MILITARY SPECIFICATION SHEET TITLE NUT, SELF-LOCKING, PLATE, CORNER LOW HEIGHT STEEL, 125 KSI Ftu 450°F	SPECIFICATION SHEET NUMBER MS21055 1 FEB 94 REV G SUPERSEDING MS21055 F 30 SEPT 87 (SEE NOTE 5) AMSC - N/A FSC 5310
DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited		Page 2 of 3

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:25Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-N-25027

Form Approved
OMB No 0704-0188

INTERCHANGEABILITY RELATIONSHIP

MS21055 NUTS CAN UNIVERSALLY REPLACE NAS684 AND NAS1027 NUTS OF LIKE MATERIAL, THREAD SIZE, LUBRICANT (DRY FILM OR NON-DRY FILM LUBRICANT), AND FASTENING METHOD (PLAIN RIVET HOLES, DIMPLED OR COUNTERSUNK RIVET HOLES) BUT THESE NAS684 AND NAS1027 NUTS CANNOT UNIVERSALLY REPLACE MS21055 NUTS

INTERCHANGEABILITY TABLE

CANCELLED PART NUMBERS	SUBSTITUTIVE PART NUMBERS
NAS684X06	MS21055-06
NAS684X06K	MS21055-06K
NAS684A06	MS21055L06
NAS684A06K	MS21055L06K
NAS684X08	MS21055-08
NAS684X08K	MS21055-08K
NAS684A08	MS21055L08
NAS684A08K	MS21055L08K
NAS684X3	MS21055-3
NAS684X3K	MS21055-3K
NAS684A3	MS21055L3
NAS684A3K	MS21055L3K
NAS684X4	MS21055-4
NAS684X4K	MS21055-4K
NAS684A4	MS21055L4
NAS684A4K	MS21055L4K
NAS684X5	MS21055-5
NAS684X5K	MS21055-5K
NAS684A5	MS21055L5
NAS684A5K	MS21055L5K
NAS684X6	MS21055-6
NAS684A6	MS21055L6
NAS684X7	MS21055-7
NAS684A7	MS21055L7

CANCELLED PART NUMBERS	SUBSTITUTIVE PART NUMBERS
NAS1027A04	MS21055L04
NAS1027A04K	MS21055L04K
NAS1027AX04	MS21055-04
NAS1027AX04K	MS21055-04K
NAS1027A06	MS21055L06
NAS1027A06K	MS21055L06K
NAS1027AX06	MS21055-06
NAS1027AX06K	MS21055-06K
NAS1027A08	MS21055L08
NAS1027A08K	MS21055L08K
NAS1027AX08	MS21055-08
NAS1027AX08K	MS21055-08K
NAS1027A3	MS21055L3
NAS1027A3K	MS21055L3K
NAS1027AX3	MS21055-3
NAS1027AX3K	MS21055-3K
NAS1027A4	MS21055L4
NAS1027A4K	MS21055L4K
NAS1027AX4	MS21055-4
NAS1027AX4K	MS21055-4K

CANCELLED PART NUMBERS	SUBSTITUTIVE PART NUMBERS
NAS1027A5	MS21055L5
NAS1027A5K	MS21055L5K
NAS1027AX5	MS21055-5
NAS1027AX5K	MS21055-5K
NAS1027A6	MS21055L6
NAS1027AX6	MS21055-6
NAS1027A7	MS21055L7
NAS1024AX7	MS21055-7
NAS1027A8	MS21055L8
NAS1027AX8	MS21055-8
NAS1027A10	MS21055L10
NAS1027AX10	MS21055-10

PREPARING ACTIVITY DLA-IS
CUSTODIANS ARMY- AV NAVY- AS
AIR FORCE- 11 DLA-
REVIEW 82.
USER CR MI
PROJECT NUMBER 5310-1947

MILITARY SPECIFICATION SHEET

TITLE
NUT SELF-LOCKING PLATE CORNER LOW HEIGHT, STEEL, 125 KSI Ftu, 450°F

SPECIFICATION SHEET NUMBER
MS21055 1 FEB 94 REV G

SUPERSEDING
MS21055 F 30 SEPT 87 (SEE NOTE 5)

AMSC- N/A FSC 5310

DISTRIBUTION STATEMENT
A Approved for public release distribution is unlimited

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202640-23T14:25Z
Check the source to verify that this is the current version before use.