USER SYMBOLS:
ARMY - GL, CL, ME, AT


REVIEWER SYMBOLS:
NAVY - AS
USAF - 82,
ARMY - AV, MI
DLA - CS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE. DISTRIBUTION IS UNLIMITED.
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repairing use shall be made from this document.

AMSC N/A

FED. SUP CLASS
4730

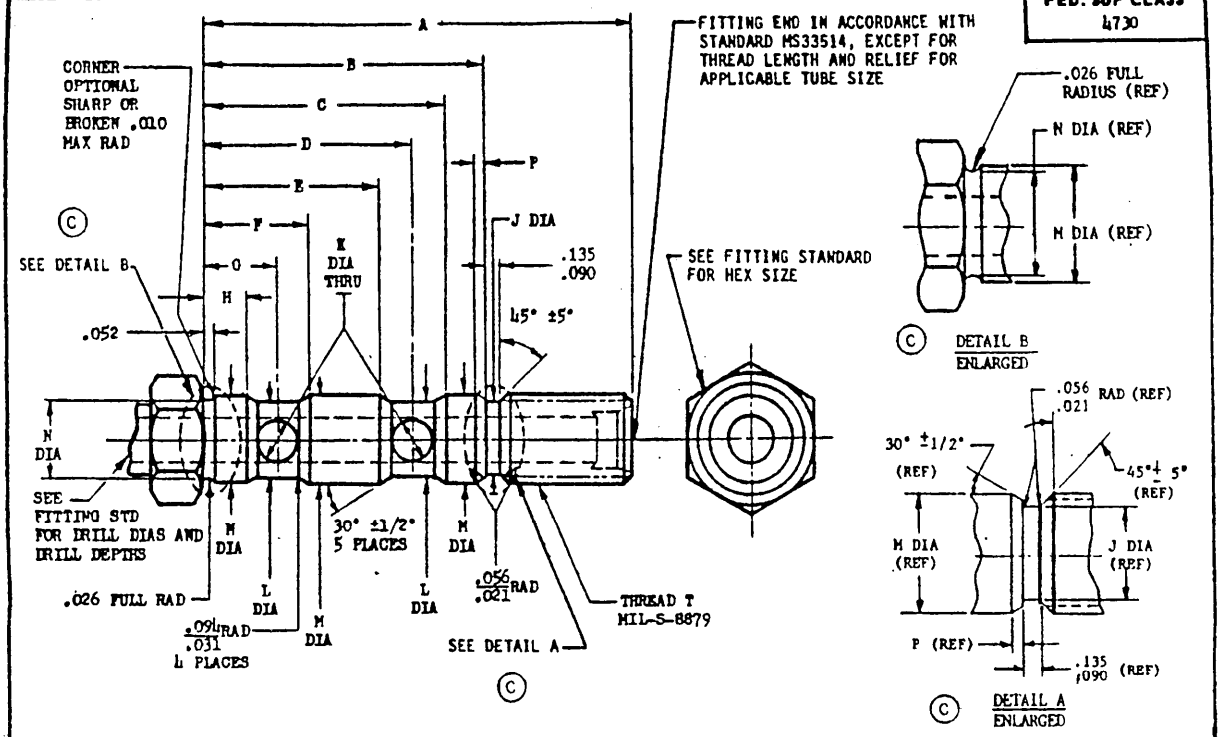

SIZE	TUBE OD	THREAD T MIL-S-8879	A	B	C	D	E	F	G	H	J ±.005	K ±.003
LOW FLOW 4	1/4	.4375-20 UNJF-3A	3.162	2.094	1.726	1.540	1.354	.726	.540	.354	.363	.189
HIGH FLOW 4	1/4	.4375-20 UNJF-3A	3.737	2.469	2.077	1.820	1.563	.891	.634	.377	.363	.300
HIGH FLOW 5	5/16	.5000-20 UNJF-3A	3.737	2.469	2.077	1.820	1.563	.891	.634	.377	.425	.300
HIGH FLOW 6	3/8	.5625-18 UNJF-3A	3.737	2.469	2.077	1.820	1.563	.891	.634	.377	.480	.300
HIGH FLOW 8	1/2	.7500-16 UNJF-3A	3.737	2.469	2.077	1.820	1.563	.891	.634	.377	.659	.300

SIZE	TUBE OD	THREAD T MIL-S-8879	L ±.005	M ±.0004	N	P
LOW FLOW 4	1/4	.4375-20 UNJF-3A	.433	.4989	.425	.060
HIGH FLOW 4	1/4	.4375-20 UNJF-3A	.740	.8114	.738	.065
HIGH FLOW 5	5/16	.5000-20 UNJF-3A	.740	.8114	.738	.065
HIGH FLOW 6	3/8	.5625-18 UNJF-3A	.740	.8114	.738	.065
HIGH FLOW 8	1/2	.7500-16 UNJF-3A	.740	.8114	.738	.065

Ⓒ DENOTES CHANGES

"DESIGN STANDARD"

APPROVED 15 Feb 56 REVISED (A) 20 Nov 57 (3) 27 June 69 (C) 24 JUL 87

P.A. Navy - AS Other Cust USAF - 99 Army-AV	INTERNATIONAL INTEREST SEE NOTE 8	TITLE FITTING END, BOLT CLUSTER FITTING, DOUBLE PORT, THROUGH, FLARELESS	MILITARY STANDARD MS21935
PROCUREMENT SPECIFICATION NONE		SUPERSEDES: MS21935 (ASG) Ⓒ	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NO. 4730-0981

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:41Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:
ARMY - GL, EL, ME, AT

REVIEWER SYMBOLS:
NAVY - AS
USAF - 82,
ARMY - AV, MI
DLA - CS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED. This military standard is approved for use by all Departments & Agencies of the Department of Defense. Submission for all new engineering and design applications and for requisitions may shall be made from this document.

AMSC N/A

FED.SUP CLASS
4730

NOTES:

1. ALL OUTSIDE MACHINED SURFACES FINISHED TO 125 RHR MAX, EXCEPT AS NOTED.
2. ALL INSIDE MACHINED SURFACES FINISHED TO 250 RHR MAX, EXCEPT AS NOTED.
3. M MACHINED SURFACES FINISHED TO 16 RHR MAX AND CONCENTRIC TO EACH OTHER WITHIN .0005 TIR.
4. (C) SURFACE FINISH IN ACCORDANCE WITH ANSI B46.1.
5. L AND M DIA AND THREAD T MUST BE CONCENTRIC WITHIN .005 TIR.
6. FITTINGS SHALL BE FREE FROM ALL HANGING BURRS AND SLIVERS.
7. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .010, ANGLES ± 1/2°.
8. CERTAIN PROVISIONS (SCREW THREADS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 17/15. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.
9. (C) IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
10. (C) REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
11. (C) THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

APPROVED 15 FEB 56 REVISED (C) FOR CHANGES SEE SHEETS 1 AND 2

P.A. NAVY — AS Other Cust USAF - 99 ARMY - AV	INTERNATIONAL INTEREST SEE NOTE 6	TITLE FITTING END, BOLT CLUSTER FITTING, DOUBLE PORT, THROUGH, FLARELESS	MILITARY STANDARD MS21935
PROCUREMENT SPECIFICATION NONE		SUPERSEDES: MS21935 (ASG) (C)	SHEET 2 OF 2

DD FORM 1 MAR 79 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1987—704-036/74673

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:41Z
Check the source to verify that this is the current version before use.