

FED. SUP CLASS
4730

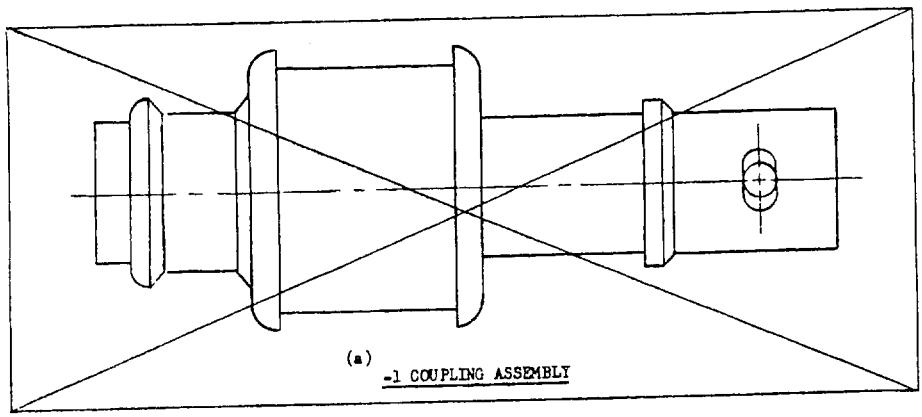

(a) -1 COUPLING ASSEMBLY

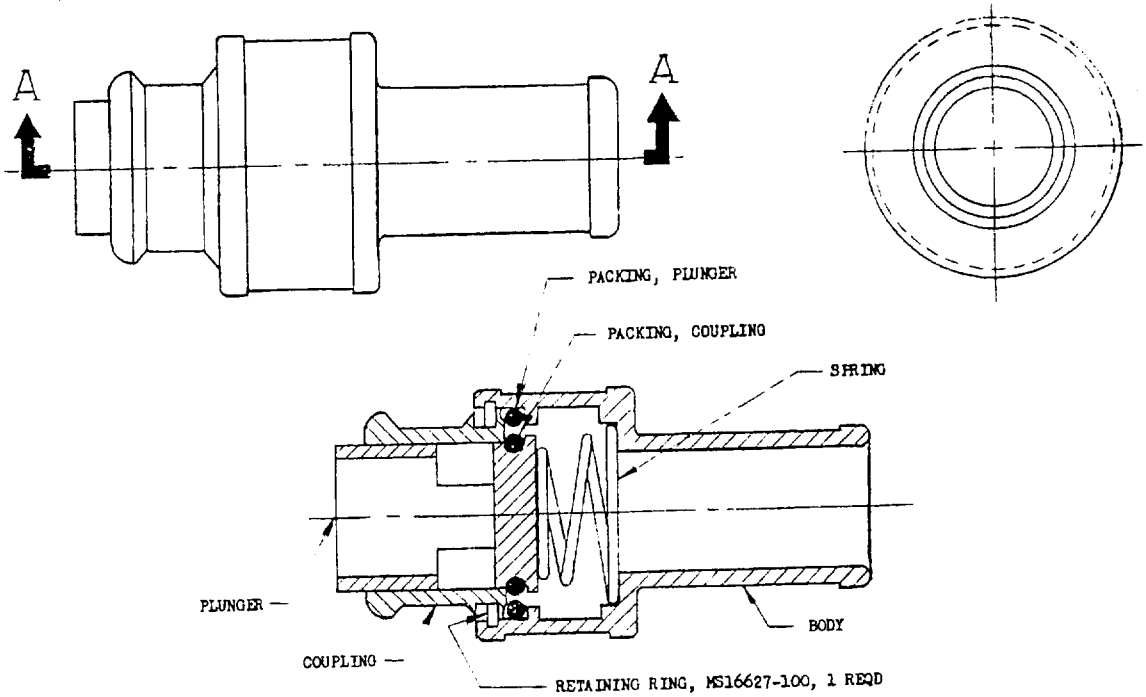

SECTION A-A

-2 CONNECTOR ASSEMBLY

	DASH NO.	PART	SUPERSEDED PART NO.
(A)	~~-1~~	~~COUPLING ASSEMBLY~~	~~53B3751~~
(A)	-2	CONNECTOR	6LA91E1-1
(A)	-3	CONNECTOR	62C4270

(A) -1 PART CANCELED AFTER 16 MARCH 1966. USE -2 PART. INTERCHANGEABILITY RELATIONSHIP: MS22011-2 PARTS ARE PHYSICALLY AND FUNCTIONALLY INTERCHANGEABLE WITH MS22011-1 PARTS AND REPLACE MS22011-1 PARTS.

(A) -2 AND -3 CONNECTORS ADDED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±.1°.

(A) ENTIRE STANDARD REVISED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID. (A) FOR CHANGES SEE SHEETS 1, 2, 3, AND 4.

APPROVED 15 May 53 REVISED (A) 16 Mar 66


Review activities: USAF - 11, 69
Navy - WP

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

P.A. USAF - 11 Other Cust Navy - WP	TITLE (A) CONNECTOR, HOSE, QUICK-DISCONNECT, MALE, ANTI "G" SUIT	MILITARY STANDARD MS22011(ASG)
PROCUREMENT SPECIFICATION MIL-C-7942	SUPERSEDES USAF DWGS 53B3751, 62C4270, AND 6LA91E1.	SHEET 1 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:44Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

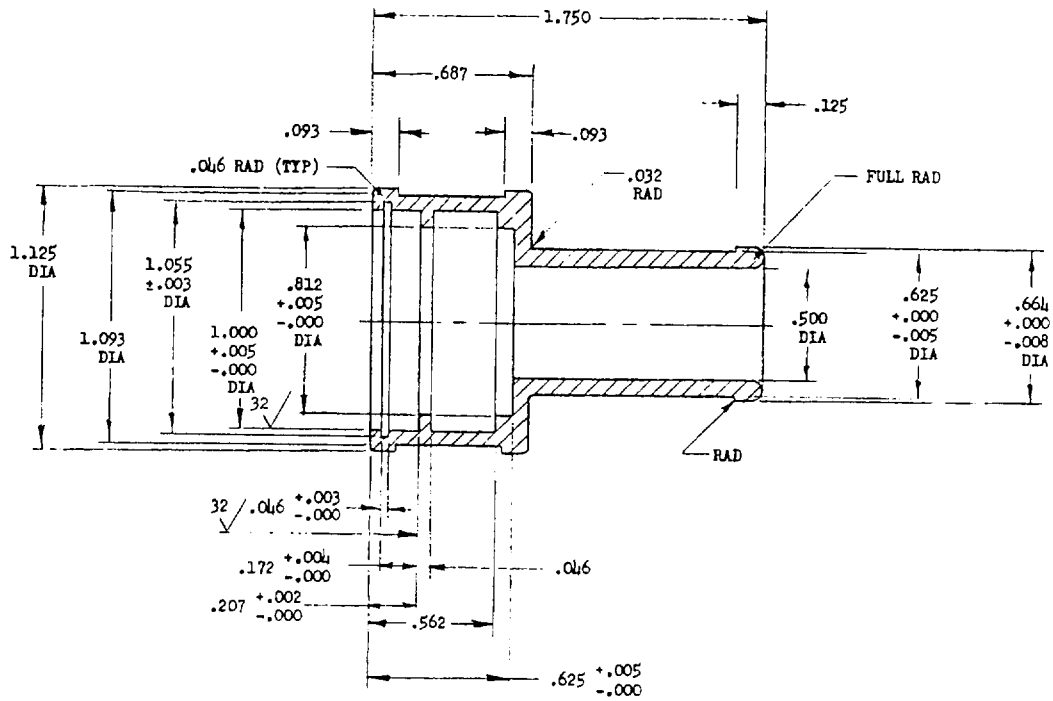


MATERIAL: AL ALLOY 2024, TEMPER T-4, QQ-A-200/3A OR QQ-A-225/6A. ANODIZE TYPE II PER MIL-A-8625. DYE BLACK.

FINISH: 125 ALL OVER EXCEPT NOTED OTHERWISE.

BREAK ALL SHARP EDGES.

BODY (-2)

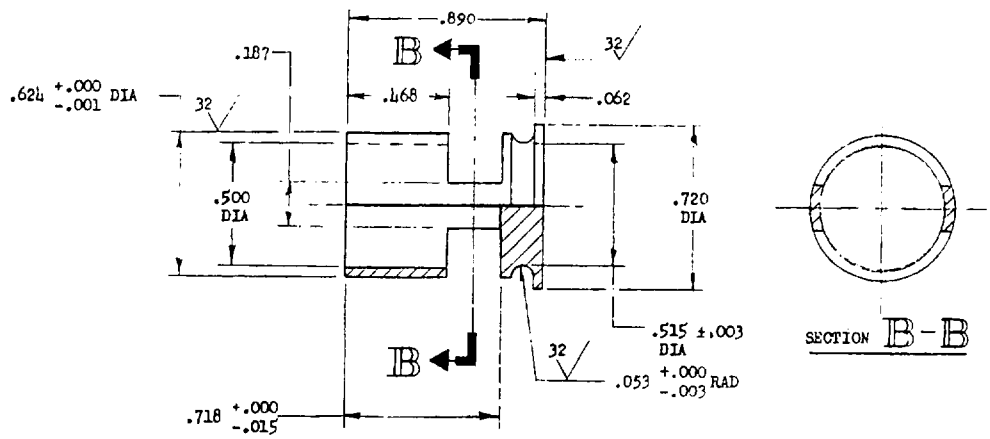

MATERIAL: AL ALLOY 2024, TEMPER T-4, QQ-A-200/3 OR QQ-A-225/6. ANODIZE TYPE II PER MIL-A-8625. DYE BLACK.

FINISH: 125 ALL OVER EXCEPT NOTED OTHERWISE.

BREAK ALL SHARP EDGES.

PLUNGER (-2)

APPROVED 15 May 53 REVISED (A) FOR CHANGES SEE SHEETS 1, 2, 3 AND 4.


P.A. USAF - 11 Other Cust Navy - WP	TITLE CONNECTOR, HOSE, QUICK-DISCONNECT, MALE, ANTI "G" SUIT (A)	MILITARY STANDARD MS22011(ASG)
PROCUREMENT SPECIFICATION MIL-C-7942	SUPERSEDES: USAF DWGS 53B3751, 62C4270, AND 6A491E1.	SHEET 2 OF

Review activities:
USAF - 11, 69
Navy - WP

...and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:44Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

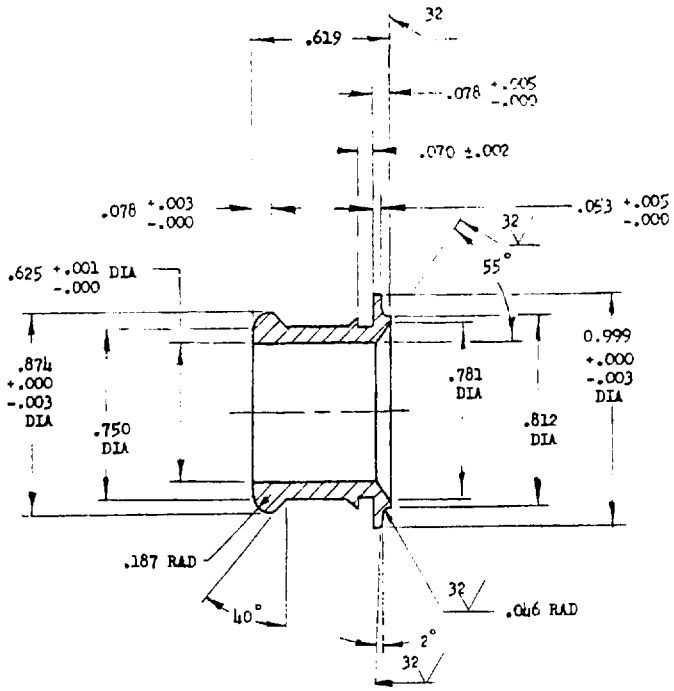


MATERIAL: CORROSION RESISTANT STEEL, QQ-S-763, COND. A, CLASS 416.

FINISH: 125 ALL OVER EXCEPT NOTED OTHERWISE.

HEAT TREATMENT: ROCKWELL C39-C41 PER MIL-H-6875.


BREAK ALL SHARP EDGES.

COUPLING (-2)

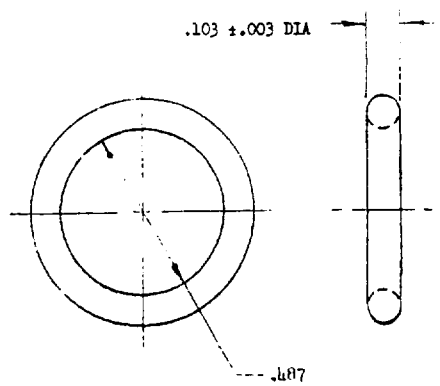

MATERIAL: RUBBER, MIL-R-6855, CLASS 2, GRADE 60.

PACKING, COUPLING (-2)

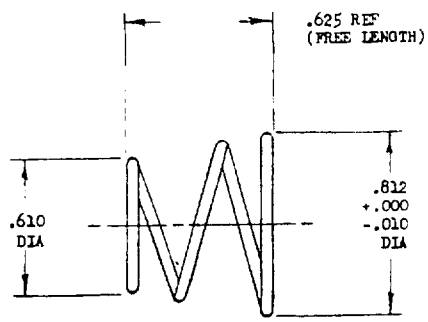

MATERIAL: CORROSION RESISTANT STEEL, QQ-W-423, COND. B, FS302, 304, OR 316.


WIRE DIA: .047

ACTIVE COILS: 1
TOTAL COILS: 3 (REF)
DIRECTION OF HELIX: OPTIONAL

LOAD AT COMPRESSED LENGTH OF .250 = 4 LB ±.4 LB.

BREAK ALL SHARP EDGES.

SPRING (-2)

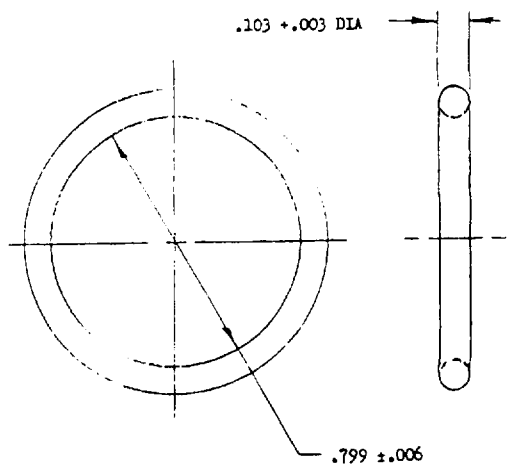

MATERIAL: RUBBER, MIL-R-6855, CLASS 2, GRADE 60.

PACKING, PLUNGER (-2)

APPROVED 15 May 53 REVISED (A) FOR CHANGES SEE SHEETS 1, 2, 3 AND 4.


Review activities: USAF - 11, 69
Navy - WP

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

P.A. USAF - 11 Other Cust Navy - WP	TITLE CONNECTOR, HOSE, QUICK-DISCONNECT, MALE, ANTI "G" SUIT (A)	MILITARY STANDARD MS22011(ASG)
PROCUREMENT SPECIFICATION MIL-C-7942	SUPERSEDES: USAF DWGS 53B3751, 6204270, AND 6A91E1.	SHEET 3 OF

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:44Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

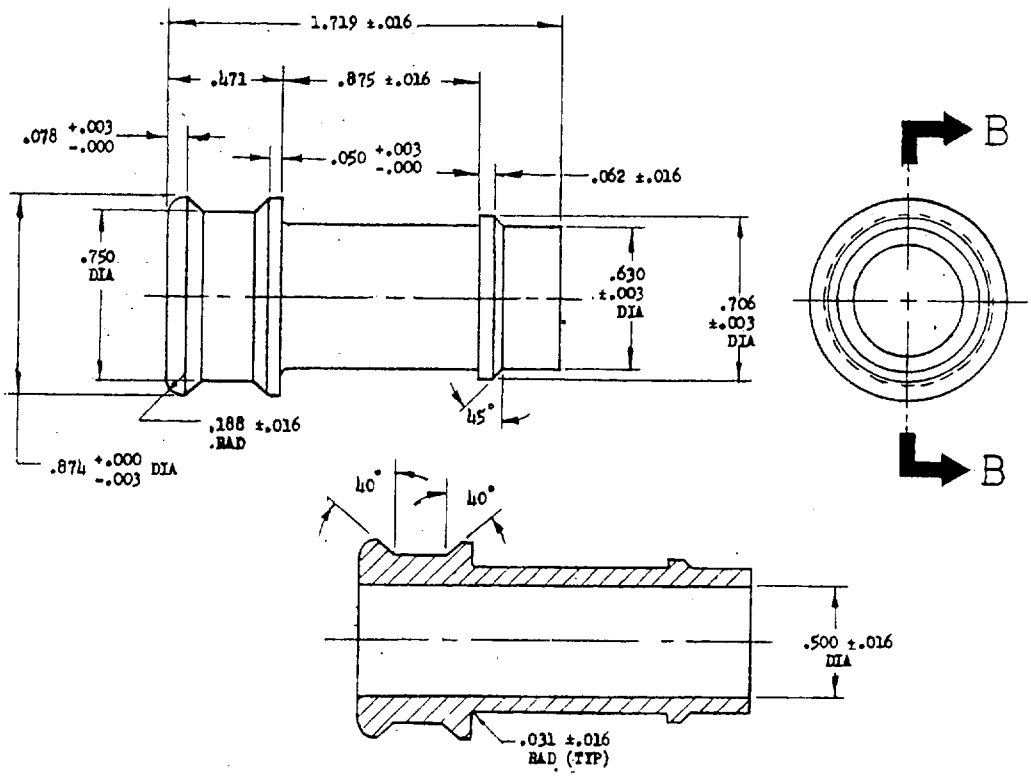

SECTION B-B

MATERIAL: CORROSION RESISTANT STEEL, QQ-S-763, CLASS 416, CONDITION A.

FINISH: ALL SURFACES 32 IN ACCORDANCE WITH MIL-STD-10.

HEAT TREATMENT: ROCKWELL HARDNESS C39-C41 IN ACCORDANCE WITH MIL-H-6875.

REMOVE ALL BURRS.

-3 CONNECTOR

APPROVED 15 May 53 REVISED (A) FOR CHANGES SEE SHEETS 1, 2, 3, AND 4.

USAF - 11, 69
Navy - WP

d the Bureau of Naval Weapons and is mandatory for use by these
tivities. All other military activities are required to employ
ns standard where suitable.

P.A. USAF - 11 Other Cust Navy - WP	TITLE CONNECTOR, HOSE, QUICK-DISCONNECT, MALE, AKTI "0" SUIT (A)	MILITARY STANDARD MS22011(ASG)	
PROCUREMENT SPECIFICATION MIL-C-7942	SUPERSEDES [illegible]	SHEET 4	OF

Source: Approved Standards Document. 2026-10-23T14:44:42
Check the source to verify that this is the current version before use.