
PROJ 5925-F06201

FED. SUP CLASS
5925

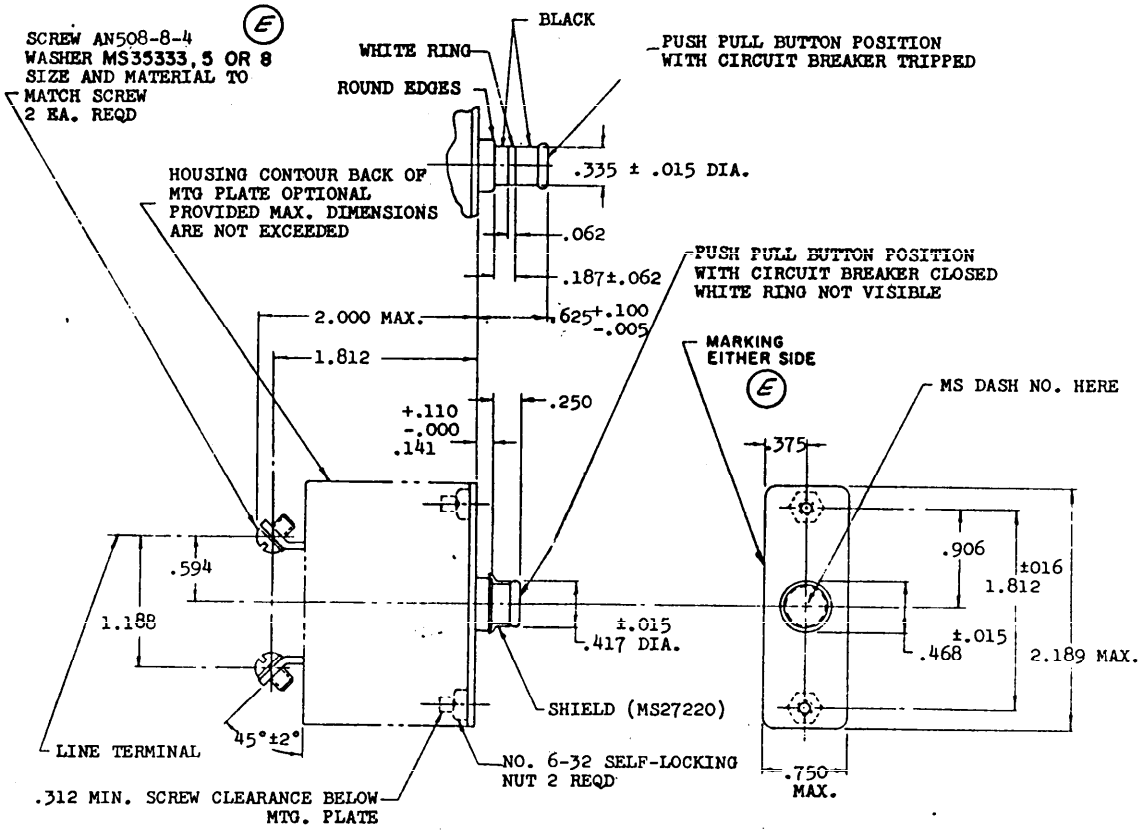

MS PART NO.	CAPACITY AMPERES
MS24506-5	5
MS24506-7	7.5
MS24506-10	10
MS24506-15	15
MS24506-20	20
MS24506-25	25
MS24506-35	35
MS24506-50	50

DETAIL REQUIREMENTS

MAX. OPERATING FORCE
PULL OUT 8 LB
RESET 12 LB

MAX OPERATING ALTITUDE	65,000 FT.
MAX VOLTAGE DROP	0.5
MAX DIELECTRIC	1500 V. rms
MAX WEIGHT	.2 LBS.

TO BE USED IN PROPELLER CIRCUITS ONLY - IN OTHER CIRCUITS USE MS25017

ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 7 FEB 58 REVISED (D) 22 APRIL 1965 (E) 30 JULY 71

Reviewer: ES

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the AFLC, Department of the Air Force and is mandatory for use by that activity. All other military activities are required to apply this standard where suitable.

P.A. AIR FORCE - 80 Other Cust (E)	TITLE CIRCUIT BREAKER - AIRCRAFT, NON TRIP-FREE, PUSH PULL, 5 TO 50 AMP, TYPE I	MILITARY STANDARD MS24506(USAF)
PROCUREMENT SPECIFICATION MIL-C-7079	SUPERSEDES: AN3161	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:55Z
Check the source to verify that this is the current version before use.

Reviewer : ES

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DETAIL ENDURANCE PERFORMANCE

SYSTEM	VOLTAGE	TYPE OF LOAD	NO. OF CYCLES
28-VOLT DC	30 ± 2	INDUCTIVE	800
		RESISTIVE	800
MECHANICAL CYCLING	0.0	NO LOAD	800

DETAIL RUPTURE CURRENT PERFORMANCE

TEST	SYSTEM	VOLTAGE BEFORE FAULT	CALIBRATED FAULT CURRENT (AMPERES)	TRANSIENT VOLTAGE AFTER CALIBRATED FAULT CURRENT INTERRUPTION	OPEN CIRCUIT VOLTAGE
NORMAL TRIP	28 VOLT DC	30 ± 2	3000 IN .01 TO .03 SECONDS AFTER FAULT INITIATION	28 WITHIN 002 SECOND 50 MAXIMUM	30 ± 2
HOLD-IN					

DETAIL CALIBRATION PERFORMANCE

TEST	CIRCUIT BREAKER RATING	% RATED CURRENT	AMBIENT TEMP. °C. ± 2	TRIPPING TIME
MIN. ULT. TRIP	5-50	115	25	NO TRIP - 1 HOUR
MAX. ULT. TRIP	5-50	138	25	1 HOUR MAX.
OVERLOAD CALIBRATION	5-50	200	25	10 TO 50 SECONDS
AMBIENT EFFECT ON CALIBRATION	5-50	200	-45.5 +57.2	25 TO 180 SECONDS 5 TO 45 SECONDS

This military standard is approved by the AFLC, Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

APPROVED 7 FEB 58 REVISED (E) SEE SHTS 1 & 2

P.A. AIR FORCE - 80
Other Cust (E)

TITLE
CIRCUIT BREAKER, - AIRCRAFT, NON TRIP-FREE, PUSH PULL, 5 TO 50 AMP TYPE I

MILITARY STANDARD
MS24506(USAF)

PROCUREMENT SPECIFICATION
MIL-C-7079

SUPERSEDES:
AN3161

SHEET 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:55Z
Check the source to verify that this is the current version before use.