INCH-POUND

MS25323L
21 September 94
SUPERSEDING
MS25323K
20 January 1989


MILITARY SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, 10 AMPERES, 2 PDT, TYPE I, SOCKET MOUNTED, HERMETICALLY SEALED

Inactive for new design after 5 June 1987.
For new designs use MS27401.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-R-6106.

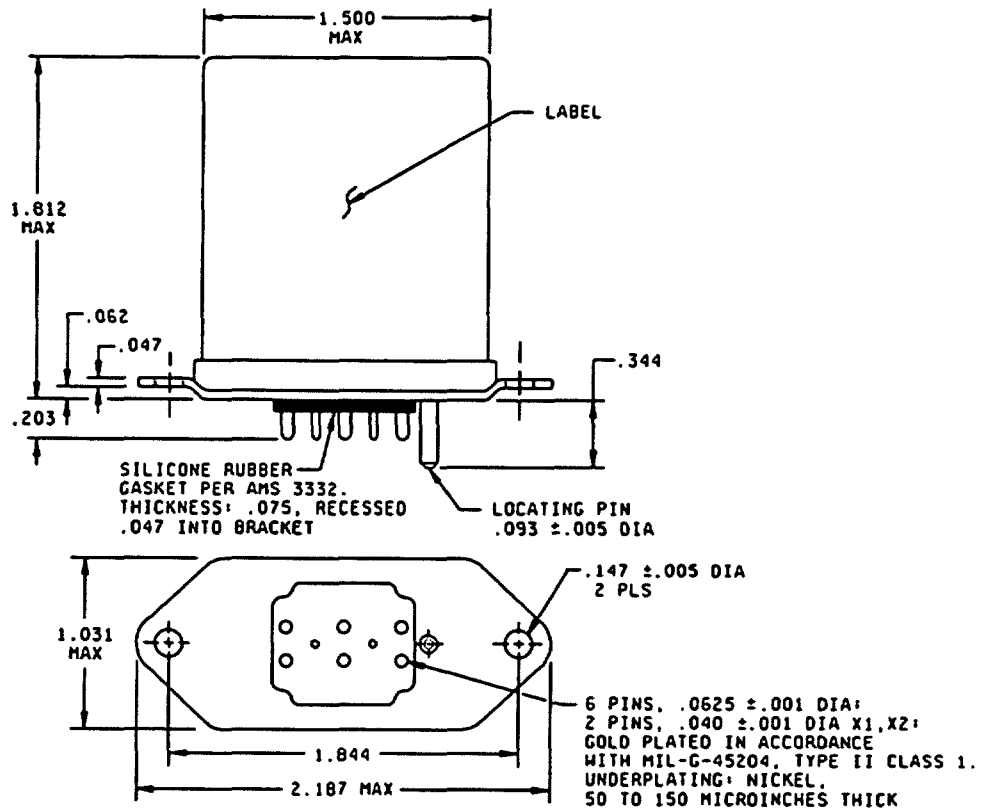


(L) FIGURE 1. Dimensions and configuration.


(L) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

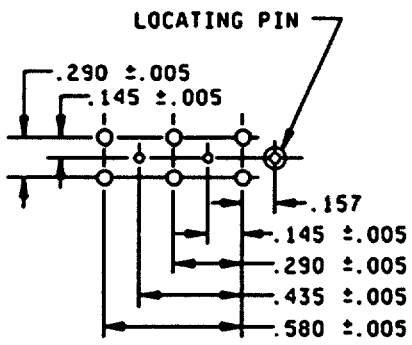

PIN LAYOUT



CIRCUIT DIAGRAM
SEE NOTES 4 AND 5

Inches	mm	Inches	mm	Inches	mm
.0010	0.025	.093	2.36	.435	11.05
.001	0.03	.145	3.68	.580	14.73
.005	0.13	.147	3.73	1.031	26.19
.040	1.02	.157	3.99	1.500	38.10
.047	1.19	.203	5.16	1.812	46.02
.062	1.57	.290	7.37	1.844	46.84
.0625	1.588	.344	8.74	2.187	55.55
.075	1.91				

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. (L) There shall be affixed to the relay a legible circuit diagram that permanently and positively identifies each terminal location specified.
5. The use of diodes on ac relays is optional. The actual application must be shown on label.
6. Pins shall be perpendicular to the header surface within one degree.
7. In the event of conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
8. Referenced government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Dash numbers and general characteristics: See table I.

Contact data:

Load ratings: See table II.

Maximum contact drop, initial: 0.150 V.

After life test: 0.175 V.

Overload current (NO): 40 amperes dc; 60 amperes ac.

Rupture current (NO): 50 amperes dc; 80 amperes ac.

Coil data: See table III.

Duty rating: Continuous.

RFI specification: MIL-STD-461 (applicable to coil circuits of ac operated relays).

Electrical data:

Minimum insulation resistance:

Initial: 100 megohms.

After life or environmental test: 50 megohms.

Dielectric strength:

Sea level, 2-5 seconds:

	Initial	After life tests
(L) Coil to case:	1,000 V rms	750 V rms
Aux. contacts:	N/A	N/A
(L) All other points:	1,000 V rms	750 V rms
Dielectric strength (altitude) (80,000 ft.)		
(L) Coil to case:	250 V rms	N/A
(L) Aux. contacts:	N/A	N/A
(L) All other points:	250 V rms	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

Environmental characteristics:

Temperature range: -70°C to +125°C.

Maximum altitude rating: 80,000 feet.

Shock, g-level: 50 g's.

(L) Duration: 6 ms.

(L) Maximum duration contact opening: 100 μs.

Vibration, sinusoidal:

G-level: 10 g's.

Frequency range: 5-1500 Hz.

Acceleration: 15 g's.

Terminal strength (high temperature pull and torque test): Not applicable.

Part or Identifying Number (PIN): MS25323- (plus applicable dash number from table I).

(L) TABLE I. Dash numbers and general characteristics.

PIN MS25323-	Type	Coil type	Terminal type	Max weight (pounds)
D2	1	dc	Plug in	0.30
A2	1	ac	Plug in	0.32
A3	1	ac	Plug in	0.32

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

(L) TABLE II. Rated contact load (amperes per pole) (case grounded). 1/

Type of load	Life operating cycles x 10^3	28 V dc				115 V ac, 1 phase				115/200 V ac, 3 phase 2/				See appropriate notes
		Main		Aux		Main		Aux		Main		Aux		
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	
Resistive	100	10	10			10	6			10	6			
Inductive	20	6	6			6	4			6	4			
Motor	100	4	4			4	3			4	3			
Lamp	100	2	2			2	1.5			2	1.5			
Transfer load														3/
Mechanical life reduced current	400	2.5	2.5			2.5	2			2.5	2			
Intermediate current	Applicable in accordance with MIL-R-6106													

1/ Absence of value indicates parameter is not applicable to this specification sheet.
2/ Absence of value indicates relay is not rated for 3-phase applications.
3/ Transfer load indicates that the relay is suitable for transfer between unsynchronized ac power supplies at the rating indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

(L) TABLE III. Operating characteristics.

PIN MS25323-	Coil data											Time (milliseconds maximum)					
	Coil	Rated			Max		Max pick-up voltage			Hold voltage 2/	Drop-out voltage 2/	Operate 3/	Release 4/	Contact bounce 3/			
														Main		Aux 6/	
		Volts 1/	Freq. Hz	Res Ω	Volts	A	Normal 2/	High temp test	Cont current test					NO	NC	NO	NC
D2	X1,X2	28	dc	N/A	29	0.20	18	19.8	22.5	7.0	1.5	20	20	2	2		
A2	X1,X2	115	400 5/	N/A	122	0.07	90	95	103	35	5.0	25	50	2	2		
A3	X1,X2	115	50/60	N/A	122	0.10	90	95	103	35	5.0	25	50	2	2		

1/ CAUTION: Use of any coil voltage less than rated coil voltage will compromise the operation of the relay.
2/ Over the temperature range.
3/ With rated coil voltage.
4/ From rated coil voltage.
5/ MS25323-A2 may be used on 60 Hz if maximum ambient temperature is limited to +85°C.
6/ Absence of value indicates parameter is not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

Quality conformance inspection:

(L) Group B and group C testing are not required. In the event of a change in the design or construction of the part, the manufacturer shall notify the qualifying activity and shall impose additional testing requirements as necessary.

Group A acceptance reports shall be submitted to the preparing activity on a yearly basis in order to retain qualification for this military standard sheet.

CONCLUDING MATERIAL

Custodians:
Navy - AS
Air Force - 85

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5945-0925)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.