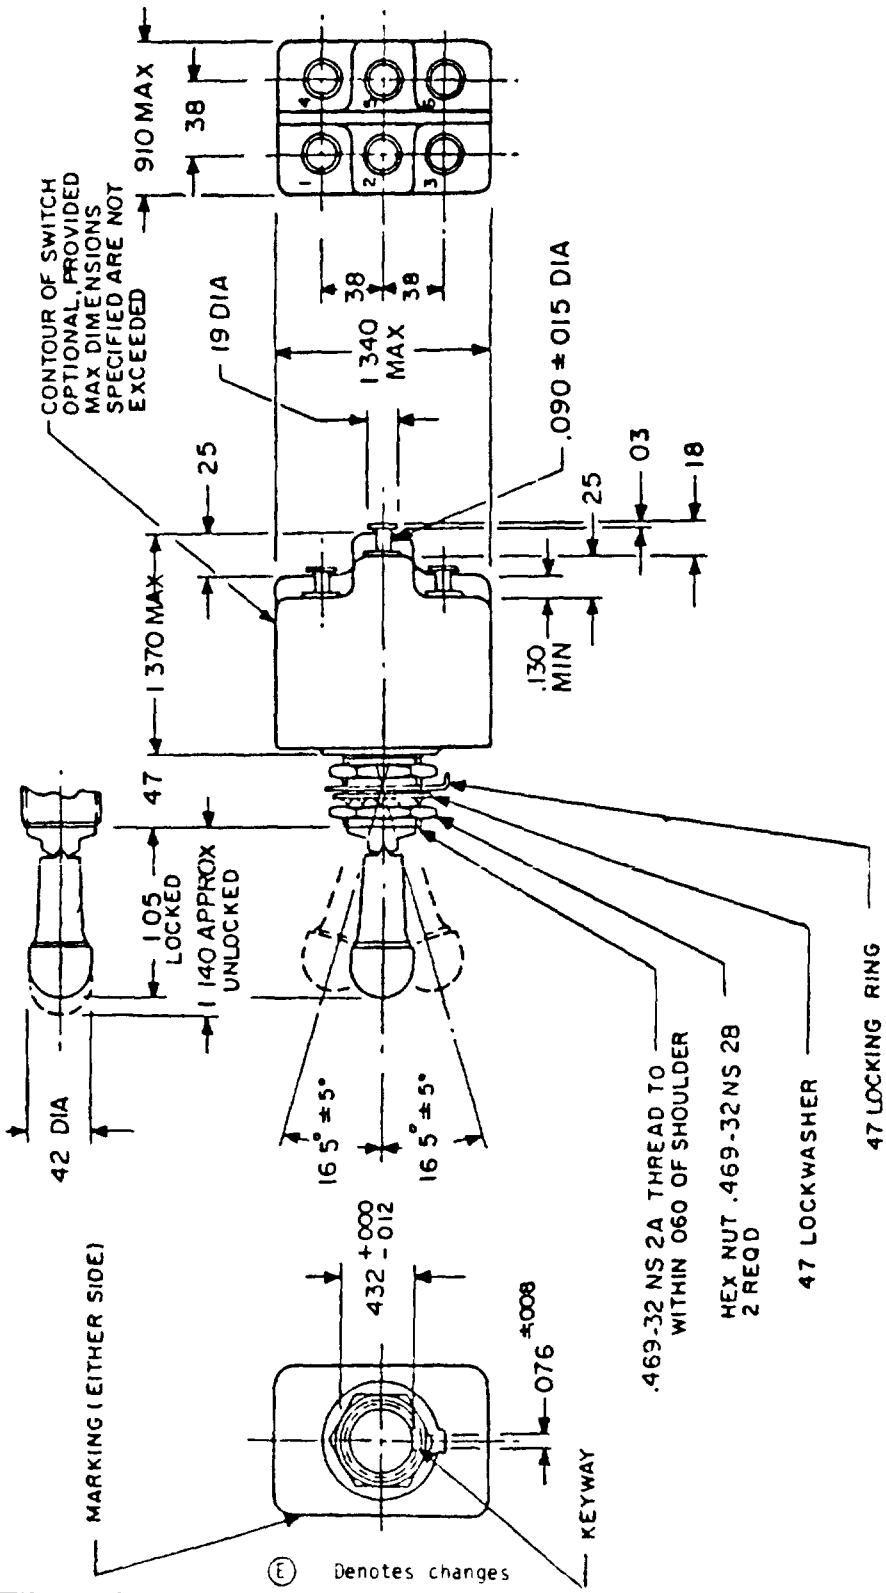
FED SUP CLASS
5930



APPROVED 15 Sep 1970 REVISED Ⓐ 22 Apr 1971 Ⓑ 27 Jun 1972 Ⓒ 14 May 1974 Ⓓ 25 Apr 1975 Ⓔ 28 Sep 1987

Preparing activity: Air Force - 85 Other Custodians: Army - EP, Navy - AS	International interest	TITLE: SWITCH, TOGGLE, TWO POLE, ENVIRONMENTALLY SEALED, LEVER-LOCK, SOLDER TERMINAL	MILITARY STANDARD MS27738
Procurement Specification: MIL-S-3950		SUPERSEDES	PAGE 1 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

AMSC N/A

5930-1358-18

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Review activities: Army - AV, Navy - EC, Air Force - 99, DLA - ES

User activity: Air Force - 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:49Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.005	0.13	.25	6 4
.008	0 20	.38	9 7
.012	0.30	.42	10.7
015	0.38	.432	10 97
.020	0.51	.469	11 91
03	0 8	.47	11.9
060	1.52	910	23.11
.076	1.93	1 05	26.67
090	2 29	1 140	28 96
.130	3 30	1.340	34 04
.18	4.6	1.370	34.80
.19	4.8		

NOTES
1. Dimensions are inches.
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ± 020 (0.51 mm) for two place decimals and ±.005 (0.13 mm) for three place decimals.
4. For hardware detail specifications, see appendix of MIL-S-3950.
5. All switches on this standard are designed so that the movement of the switch mechanism is opposite to that of the toggle lever
6. Maximum weight is 0.17 pound.
7. Locking arrangement Positive locking shall be accomplished and shall prevent motion of the toggle lever until the locking mechanism is manually released
8. The force required to release the locking mechanism shall be 3 to 5 pounds
9. The locking means at the top of the toggle bushing shall be capable of withstanding a torque of 20 inch-pounds applied in both directions immediately following the humidity test.
10. Part number example, MS27738-21A (locking combination 'A').
(E) 11. In the event of a conflict between the text of this standard and the reference cited herein, the text of this standard shall take precedence.
(E) 12. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein

APPROVED 15 Sep 1979 REVISED (E) For changes see page 2

User activity Air Force - 11

Review activities Army - AV
Navy - EC
Air Force - 99
CLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

P A Air Force - 85 Other Cust Army - ER Navy - AS	International interest	TITLE SWITCH, TOGGLE, TWO POLE, ENVIRONMENTALLY SEALED, LEVER-LOCK, SOLDER TERMINAL	MILITARY STANDARD MS27738
Procurement Specification MIL-S-3950		SUPERSEDES	PAGE 2 OF 4

DD FORM 1 MAY 73 672 (Coordinated by Air Force - 85)

Source: https://assistdla.mil - Downloaded: 2026-10-23T16:49Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AV
Navy - [illegible]
Air Force - 11
[illegible] - [illegible]

User activity: Air Force - 11

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

P A: Air Force - 85
Other Cust: Army - ER
Navy - AS

International interest:

Procurement Specification: MIL-S-3950

SUPERSEDES

TITLE: SWITCH, TOGGLE, TWO POLE, ENVIRONMENTALLY SEALED, LEVER-LOCK, SOLDER TERMINAL












MILITARY STANDARD

MS27738

PAGE 3 OF 4

FED SUP CLASS 5930

Locking combinations

A  LOCKED IN THREE POSITIONS	B  LOCKED IN CENTER AND DOWN POSITIONS (KEYING SIDE)	D  LOCKED OUT OF CENTER POSITION	E  LOCKED IN CENTER POSITION	F  LOCKED IN UP POSITION (OPPOSITE KEYING)	G  LOCKED IN DOWN POSITION (KEYING SIDE)	H  LOCKED OUT OF CENTER AND DOWN POSITION (KEYING SIDE)
J  LOCKED OUT OF CENTER AND UP POSITION (OPPOSITE KEYING)	K  LOCKED IN CENTER AND UP POSITION (OPPOSITE KEYING)	L  LOCKED OUT OF DOWN POSITION (KEYING SIDE)	M  LOCKED OUT OF AND INTO UP POSITION (OPPOSITE KEYING)	N  LOCKED OUT OF UP POSITION (OPPOSITE KEYING)	P  LOCKED OUT OF AND INTO DOWN POSITION (KEYING SIDE)	FIGURES A THROUGH P DO NOT REPRESENT DETAILS OF CONSTRUCTION THEY SCHEMATICALLY ILLUSTRATE LOCKING CONFIGURATIONS AND MOMENTARY POSITIONS

APPROVED 15 Sep 1970 REVISED (E) for change see page 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:49Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Review activities Army - AV
Navy - EC
Air Force - 99
DLA - ES

User activity Air Force - 11

DD FORM 1 MAY 73 672 (Cop[illegible])

Procurement Specification MIL-S-3950

P A Air Force - 85
Other Cust Army - ER
Navy - AS

International interest

SUPERSEDES

TITLE SWITCH, TOGGLE, TWO POLE, ENVIRONMENTALLY SEALED, LEVER-LOCK, SOLDER TERMINAL

MILITARY STANDARD MS27738

PAGE 4 OF 4

FED SUP CLASS 5930

Detail requirements

MS part number	Available locking combinations	Circuit with toggle lever in			Current capacity (amperes) 28 volts dc			Current capacity (amperes) 115 volts, 60 and 400 hertz ac		
		Keying side	Center	Opposite keying side	Lamp-load circuit	Resistive circuit	Inductive circuit	Lamp-load circuit	Resistive circuit	Inductive circuit
MS27738-1	All	1-2 On 4-5	1-2 On 5-6	2-3 On 5-6	7	20	15	4	15	15
MS27738-2	E, F, K, L, M, N	Mom. 1-2 on 4-5	1-2 On 5-6	2-3 On 5-6						
MS27738-3	E, L, N	Mom. 1-2 on 4-5	1-2 On 5-6	Mom. 2-3 on 5-6	5	18	10	2	11	8
MS27738-21	All	1-2 On 4-5	Off	2-3 On 5-6						
MS27738-22	D, F, G	Off	None	2-3 On 5-6	7	20	15	4	15	15
MS27738-23	D, F, G	1-2 On 4-5	None	2-3 On 5-6						
MS27738-24	E, F, K, M	None	Off	2-3 On 5-6						
MS27738-25	F	None	Mom. off	2-3 On 5-6						
MS27738-26	F	Mom. 1-2 on 4-5	None	2-3 On 5-6						
MS27738-27	E, L, N	Mom 1-2 on 4-5	Off	Mom. 2-3 on 5-6						
MS27738-28	E	Mom. 1-2 on 4-5	Off	None	5	18	10	2	11	8
MS27738-29	F	Mom. off	None	2-3 On 5-6						
MS27738-30	F	Mom 1-2 on 4-5	None	Off						
MS27738-31	E, F, K, L, M, N	Mom 1-2 on 4-5	Off	2-3 On 5-6						
MS27738-32	E	None	1-2 On 4-5	Mom. 2-3 on 5-6						
MS27738-33	E, F, K, M	None	1-2 On 4-5	2-3 On 5-6	7	20	15	4	15	15

APPROVED 15 Sep 1970 REVISED (E) For changes see page 2

Check the source to verify that this is the current version before use.