A-A-517
September 25, 1979

COMMERCIAL ITEM DESCRIPTION


DRILL, TWIST, 1/4-INCH SHANK

The General Services Administration has authorized the use of this commercial item description.

This commercial item description covers ¼-inch shank twist drills assigned National Stock Numbers (NSNs) as listed below.

Salient characteristics:

Split point.
Drill point angle 135° ± 5°.
M1, M2, M7, or M10 high speed steel material.
Hardness of the fluted portion Rockwell C 63 - 66.
Corrosion resistant surface or black oxide treated on all surfaces except the point and margin.
The unfluted portion of the drill permanently and legibly marked with the manufacturer's identification, drill size, "HSS" or "High Speed."
Overall length tolerance shall be ± ¼ inch.
Furnished in the following sizes and lengths:

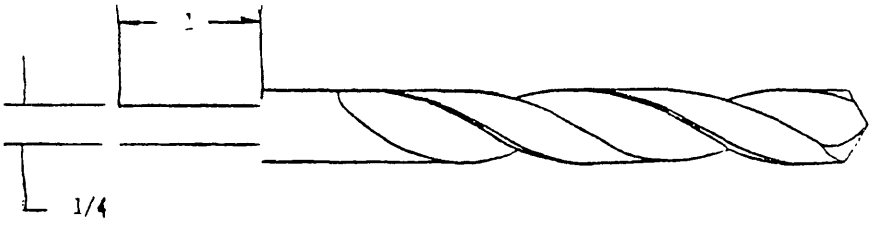

NSN	Dimensions
5133-00-241-5787	9/32-inch diameter, 3 19/32-inch overall length
5133-00-241-5944	5/16-inch diameter, 3 27/32-inch overall length
5133-00-241-5948	11/32-inch diameter, 4 1/32-inch overall length
5133-00-262-7349	3/8-inch diameter, 4 1/4-inch overall length
5133-00-133-4210	13/32-inch diameter, 4 15/32-inch overall length
5133-00-133-4215	7/16-inch diameter, 4 11/16-inch overall length
5133-00-241-5916	15/32-inch diameter, 4 7/8-inch overall length
5133-00-133-4216	1/2-inch diameter, 5 3/32-inch overall length

Workmanship. The drills shall be free from fins, burrs, rust, imperfections and any other defects which may impair serviceability, durability, or appearance.

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Recovered materials. The manufacturer shall utilize recovered materials to the maximum extent practicable.

Preservation, packaging, packing, and marking. Each drill (six per package) shall be preserved and packed in accordance with normal commercial practice and packed to assure acceptance by common carrier and provide product protection against loss and damage during multiple shipments, handling, and storage. The shipping container shall be in compliance with National Motor Freight Classification and Uniform Freight Classification. Marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.