[INCH-POUND]
A–A–55563/28
October 17, 2006

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOLDER, ELECTRICAL CARD, METAL CARD GUIDE, CLOSED ENDED, WITH 3 MOUNTING HOLES, FOR USE WITH HEAT SINKS

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A–A–55563.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

AA55563	/28	@	H	XX	&
CID number	Applicable CID specification sheet	Material	Card holder width/ board thickness	Length	Finish

Example: AA55563/28DH30G is the PIN for a stainless steel of temper ¼ H, 3.0 inch (76 mm) long, passivated, three mounting hole card guide for used with heat sinks. The card guide also features a center mounting hole.

SALIENT CHARACTERISTICS.

Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified herein (see figure 1).

Material type. Material types shall be defined in A–A–55563. The applicable material type designators for this CID specification sheet are “A” (beryllium copper, temper TD01), “B” (beryllium copper, temper TH01), or “D” (stainless steel, temper).

Material thickness. The beryllium copper thickness shall be .008 ±.002 inch (0.20 ±0.05 mm).


Card holder width/board thickness. The card holder width/board thickness is variable and based on the distance the card guide is mounted from the heat sink side wall (see figure 1). To obtain optimum clamping force, the centerline of the card guide installation holes in the heat sink shall be spaced .105 inch (2.67 mm) plus the thickness of the circuit card assembly printed board thickness from the side wall. The applicable card holder width/board thickness designator for this CID specification sheet is “H”.

Overall length. Overall length is shown on figure 1 as dimension "L", and is displayed in table I herein. Applicable overall length designator “10”, “15”, “20”, “25”, “30”, “35”, “40”, “45”, “50”, “55”, or “60” shall be included in the PIN.

Finish. Finish types shall be defined in A–A–55563. Applicable finish materials designator “H”, “K”, “D”, “C”, “E”, “F”, “J”, or “R” are available for material type designators “A” and “B”. Finish designator “G” is the only finish available for material type designator “D”.

Mounting hole spacing. Mounting hole spacing is shown on figure 1 as dimension "M" and “M/2”. Dimension “M” and “M/2” are listed in table I herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

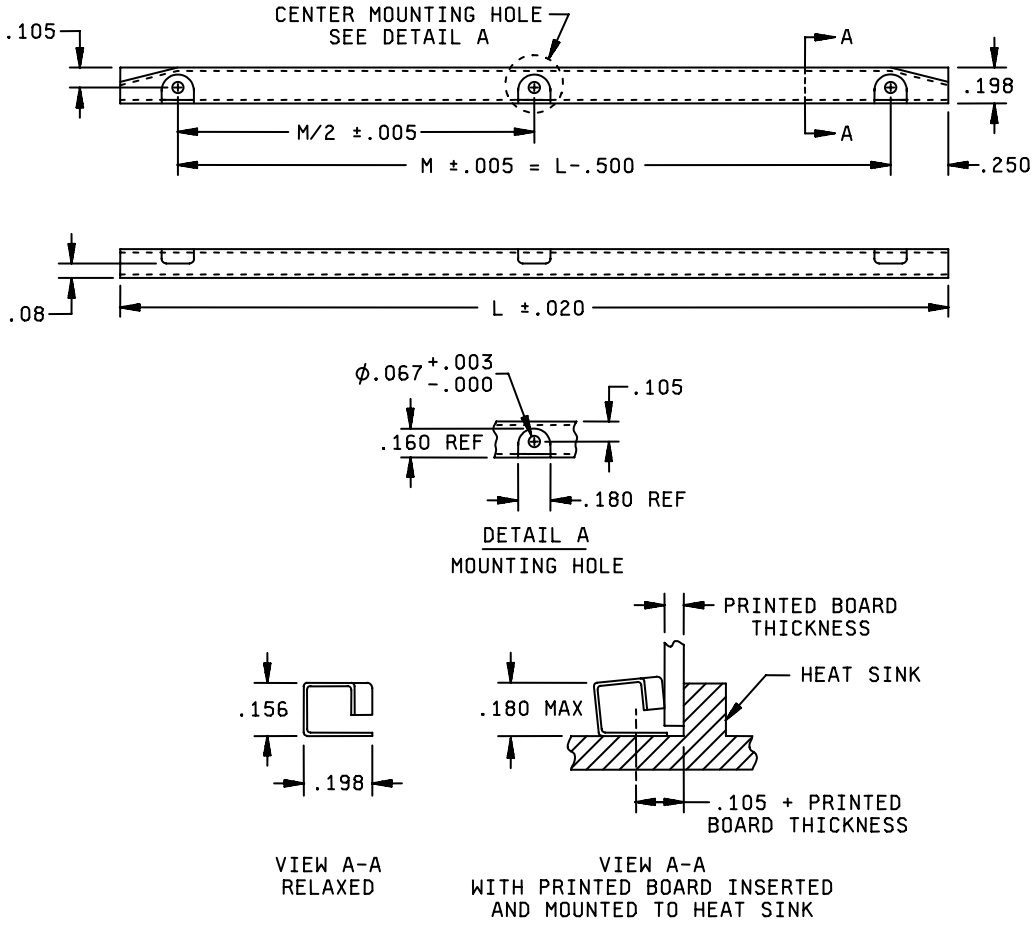

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.067	1.70	.156	3.96	.198	5.03
.005	0.13	.08	2.03	.160	4.06	.250	6.35
.020	0.51	.105	2.67	.180	4.57	.500	12.7

NOTES:
1. Dimensions are in inches. Millimeters are given for information only.
2. Unless otherwise specified, tolerances are, ±.02 inch (0.5 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.

FIGURE 1. Card holder design and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

TABLE I. Length and hole spacing. 1/ 2/

PIN designator for overall length	Dimension “L” ±.020 (0.51)	Dimension “M” ±.005 (0.13)	Dimension “M/2” ±.005 (0.13)
10	1.0 (25)	.50 (13)	N/A
15	1.5 (38)	1.0 (25)	N/A
20	2.0 (51)	1.5 (38)	.750 (19.1)
25	2.5 (64)	2.0 (51)	1.00 (25.4)
30	3.0 (76)	2.5 (64)	1.25 (31.8)
35	3.5 (89)	3.0 (76)	1.50 (38.1)
40	4.0 (102)	3.5 (89)	1.75 (44.5)
45	4.5 (114)	4.0 (102)	2.00 (50.8)
50	5.0 (127)	4.5 (114)	2.25 (57.2)
55	5.5 (140)	5.0 (127)	2.50 (63.5)
60	6.0 (152)	5.5 (140)	2.75 (69.9)

1/ Dimensions are in inches. Millimeters are given for information only.
2/ Unless otherwise specified, tolerances are ±.02 inch (0.5 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A-A-55563 – Holder, Electrical Card, Metal Card Guide, General Requirements for.

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
18915	Birtcher Pentair Electronic Packaging 14100 Danielson Street Poway, CA 92064–6898	Telephone: (858) 679–4550 Facsimile: (858) 679–4555 Electronic mail: infobirtcher@pentair-ep.com URL: www.birtcherproducts.com

Part number supersession data. This CID specification sheet supersedes the following manufacturer’s part numbers as shown. The information in table II is being provided to assist in reducing proliferation in the Government inventory system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

TABLE II. Commercial part number supersession data.

CID PIN; AA55563/28@HXX& 1/				Manufacturers 2/	
Material type	Card holder width/board thickness	Overall length designator	Finish 3/	CAGE 18915 4/	
A	H	10	3/	37C-6B-2-P	
A	H	15	3/	37C-6B-3-P	
A	H	20	3/	37C-6B-4-P	
A	H	25	3/	37C-6B-5-P	
A	H	30	3/	37C-6B-6-P	
A	H	35	3/	37C-6B-7-P	
A	H	40	3/	37C-6B-8-P	
A	H	45	3/	37C-6B-9-P	
A	H	50	3/	37C-6B-10-P	
A	H	55	3/	37C-6B-11-P	
A	H	60	3/	37C-6B-12-P	
B	H	10	3/	37C-6BH-2-P	
B	H	15	3/	37C-6BH-3-P	
B	H	20	3/	37C-6BH-4-P	
B	H	25	3/	37C-6BH-5-P	
B	H	30	3/	37C-6BH-6-P	
B	H	35	3/	37C-6BH-7-P	
B	H	40	3/	37C-6BH-8-P	
B	H	45	3/	37C-6BH-9-P	
B	H	50	3/	37C-6BH-10-P	
B	H	55	3/	37C-6BH-11-P	
B	H	60	3/	37C-6BH-12-P	
D	H	10	G	37C-6CR-2	
D	H	15	G	37C-6CR-3	
D	H	20	G	37C-6CR-4	
D	H	25	G	37C-6CR-5	
D	H	30	G	37C-6CR-6	
D	H	35	G	37C-6CR-7	
D	H	40	G	37C-6CR-8	
D	H	45	G	37C-6CR-9	
D	H	50	G	37C-6CR-10	
D	H	55	G	37C-6CR-11	
D	H	60	G	37C-6CR-12	

1/ See Classification/Part or Identification Number (PIN) for symbol representation.
2/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PINs shown. For actual part marking requirements, see the marking paragraph of A–A–55563.
3/ Finish materials designator “H”, “K”, “D”, “C”, “E”, “F”, “J”, or “R” are available for this material type.
4/ Manufacturer CAGE 18915 superseded part number suffix "P" denotes finish material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

Guidance on use of alternative parts with less hazardous or non–hazardous materials. This CID specification sheet provides for a number of alternative plating materials via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit, and function requirements of their application.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force – 11
DLA – CC

Review activity:
Air Force – 99

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FSS:

Preparing Activity:

DLA – CC

Project 5998–2006–013

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.