[INCH–POUND]

A–A–55563/29B
29 November 2018
Superseding
A–A–55563/29A
29 November 2013

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

# HOLDER, ELECTRICAL CARD, METAL CARD GUIDE, NARROW PROFILE, CENTER MOUNT, WITH FLARED ENTRY, WITH 2 MOUNTING HOLES

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of commercial item description (CID) A–A–55563.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This CID specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see notes).

| AA55563 | /29 | @ | # | XX | & |
|---|---|---|---|---|---|
| CID number | Applicable CID specification sheet | Material | Card holder width/ board thickness (see table I) | Length (see table II) | Finish |

Example: AA55563/29AH50H is the PIN for a narrow profile card guide with two center mounting holes. The card guide is 5.0 inches (127 mm) long, constructed of beryllium copper of temper TD01, and has silver plate finish.

SALIENT CHARACTERISTICS.

Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified herein (see figure 1, table I and table II) and meet the general requirements specified in CID A–A–55563.

Material type. Material types shall be defined in A–A–55563. The applicable material type designators for this CID specification sheet are "A" (beryllium copper of temper TD01, formerly 1/4 H) or "B" (beryllium copper of temper TH01; formerly 1/4 HT). The material type designator and shall be included in the PIN.

Material thickness. The material thickness shall be .006 ±.002 inch (0.15 ±0.05 mm).

Card holder width/board thickness. The card holder width/board thickness shall be defined in table I herein and is shown on figure 1 as dimensions "A" and "B". The applicable card holder width/board thickness designators for this CID specification sheet are also used to designate mounting hole size as specified in table I.


Overall length. Overall length is shown on figure 1 as dimension "L", and is displayed in table II herein. Applicable overall length designator "10", "15", "20", "25", "30", "35", "40", "45", "50", "55", or "60" shall be included in the PIN.

Finish. Finish types shall be defined in A–A–55563. Applicable finish materials designator "C" (copper plate), "E" (gold plate), "F" (nickel plate), "H" (silver plate), "J" (zinc, yellow chromate), "K" (no finish), or "R" (zinc, clear chromate) are available for material type designators "A" and "B". The finish designator shall be included in the PIN.

Mounting hole spacing. Mounting hole spacing is shown on figure 1 as dimension "M". Dimension “M” is listed in table I herein.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

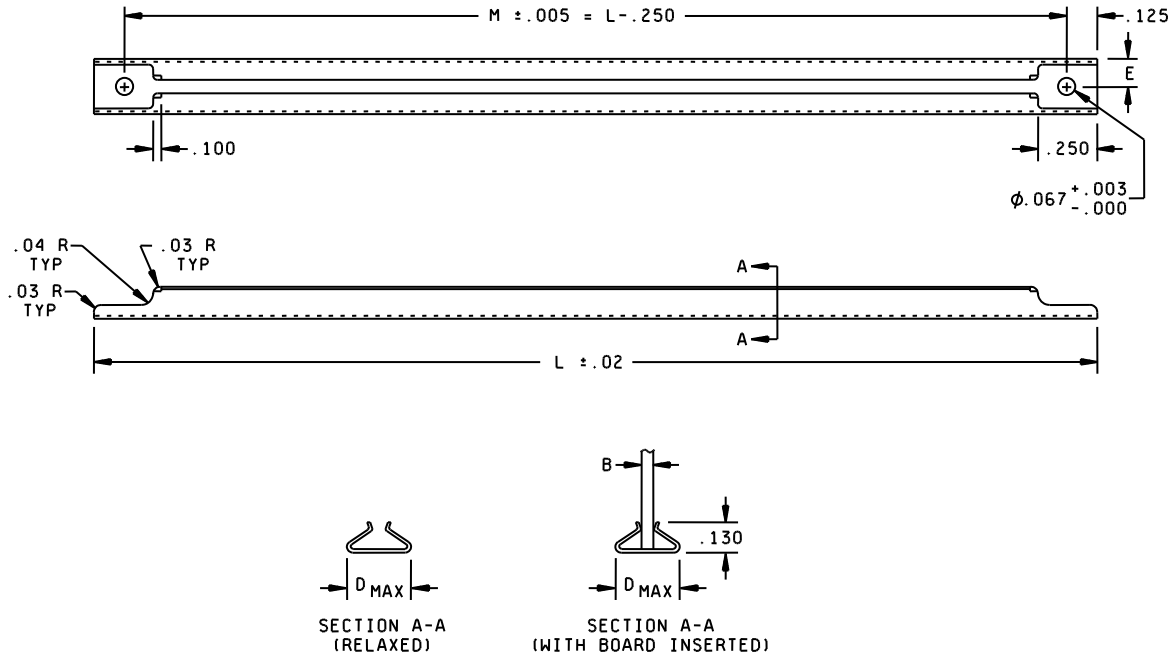


| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .003 | 0.08 | .03 | 0.76 | .067 | 1.70 | .125 | 3.18 |
| .005 | 0.13 | .04 | 1.02 | .100 | 2.54 | .130 | 3.30 |
| .02 | 0.51 | | | | | .250 | 6.35 |

NOTES:
1. Dimensions are in inches. Millimeters are given for information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.5 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

FIGURE 1. Card holder design and dimensions.

TABLE I. Card holder configurations and dimensions. 1/

| PIN designator for card holder width/ board thickness | Dimension "B" 2/ | | Dimension "D" 2/ | | Dimension "E" 2/ | |
|---|---|---|---|---|---|---|
| | Inches | mm | Inches | mm | Inches | mm |
| M | .031 | 0.79 | .190 | 4.83 | .095 | 2.42 |
| P | .063 | 1.60 | .190 | 4.83 | .095 | 2.42 |
| T | .094 | 2.39 | .200 | 5.08 | .100 | 2.54 |
| W | .125 | 3.18 | .210 | 5.33 | .105 | 2.67 |

1/ See figure 1. Millimeters are given for information only.
2/ Unless otherwise specified, tolerances are ±.02 inch (0.5 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

TABLE II. Length and hole spacing. 1/ 2/

| PIN designator for overall length | Dimension "L" ±.020 (0.51) | Dimension "M" ±.005 (0.13) |
|---|---|---|
| 10 | 1.0 (25) | .750 (19.1) |
| 15 | 1.5 (38) | 1.25 (31.8) |
| 20 | 2.0 (51) | 1.75 (44.5) |
| 25 | 2.5 (54) | 2.25 (57.2) |
| 30 | 3.0 (76) | 2.75 (69.9) |
| 35 | 3.5 (89) | 3.25 (82.6) |
| 40 | 4.0 (102) | 3.75 (95.3) |
| 45 | 4.5 (114) | 4.25 (108.0) |
| 50 | 5.0 (127) | 4.75 (120.7) |
| 55 | 5.5 (140) | 5.25 (133.4) |
| 60 | 6.0 (152) | 5.75 (146.1) |

1/ Dimensions are in inches. Millimeters are given for information only.
2/ Unless otherwise specified, tolerances are ±.02 inch (0.5 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A–A–55563 – Holder, Electrical Card, Metal Card Guide, General Requirements For.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

Ordering data. Ordering data shall be as specified in A–A–55563.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

| Manufacturer CAGE | Manufacturer name and address | Manufacturer contact information |
|---|---|---|
| 61081 | Pentair Technical Products<br>dba Schroff (formerly Birtcher)<br>7328 Trade Street<br>San Diego, CA 92121–3410 | Telephone: (858) 740–2400<br>Facsimile: (858) 740–2430<br>E-mail: askschroff@nVent.com<br>URL: https://schroff.nvent.com |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. These CID specification sheet PINs supersede the following manufacturer's P/Ns in table III as shown. The CID PINs listed in table III cover the different lengths available. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. Commercial part number supersession data.

| CID PIN; AA55563/29@#XX& 1/ | | | | Manufacturers 2/ | |
|---|---|---|---|---|---|
| Material type | Card holder width/board thickness | Overall length | Finish | CAGE 61081 4/ | |
| A | M, P, T, or W | 10 | 3/ | 21B–T–2–F | |
| A | M, P, T, or W | 15 | 3/ | 21B–T–3–F | |
| A | M, P, T, or W | 20 | 3/ | 21B–T–4–F | |
| A | M, P, T, or W | 25 | 3/ | 21B–T–5–F | |
| A | M, P, T, or W | 30 | 3/ | 21B–T–6–F | |
| A | M, P, T, or W | 35 | 3/ | 21B–T–7–F | |
| A | M, P, T, or W | 40 | 3/ | 21B–T–8–F | |
| A | M, P, T, or W | 45 | 3/ | 21B–T–9–F | |
| A | M, P, T, or W | 50 | 3/ | 21B–T–10–F | |
| A | M, P, T, or W | 55 | 3/ | 21B–T–11–F | |
| A | M, P, T, or W | 60 | 3/ | 21B–T–12–F | |
| B | M, P, T, or W | 10 | 3/ | 21BH–T–2–F | |
| B | M, P, T, or W | 15 | 3/ | 21BH–T–3–F | |
| B | M, P, T, or W | 20 | 3/ | 21BH–T–4–F | |
| B | M, P, T, or W | 25 | 3/ | 21BH–T–5–F | |
| B | M, P, T, or W | 30 | 3/ | 21BH–T–6–F | |
| B | M, P, T, or W | 35 | 3/ | 21BH–T–7–F | |
| B | M, P, T, or W | 40 | 3/ | 21BH–T–8–F | |
| B | M, P, T, or W | 45 | 3/ | 21BH–T–9–F | |
| B | M, P, T, or W | 50 | 3/ | 21BH–T–10–F | |
| B | M, P, T, or W | 55 | 3/ | 21BH–T–11–F | |
| B | M, P, T, or W | 60 | 3/ | 21BH–T–12–F | |

1/ See classification Part/Identification Number for symbol representations.

2/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PINs shown. For actual part marking requirements, see the marking paragraph of A–A–55563.

3/ Finish materials designator "C", "D", "E", "F", "H", "J", "K", or "R" are available for this material type.

4/ Manufacturer CAGE 61081 superseded part number the series type is "21", the letters "B" or "BH" denotes material type, the letter "T" denotes card holder width/board thickness, the numbers "4" through "12" denotes card holder lengths, and the letter "F" denotes finish material.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

Guidance on use of alternative parts with less hazardous or non–hazardous materials. This CID specification sheet provides for a number of alte1rnative plating materials via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit, and function requirements of their application.

Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous revision, due to the extensiveness of the changes.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FAS

Preparing activity:

DLA – CC

Project 5998–2019–003

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.