[INCH-POUND]
A-A-55564/1
6 October 1995

COMMERCIAL ITEM DESCRIPTION

RESISTOR, VOLTAGE SENSITIVE (VARISTOR), BASE MOUNT

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for a transient voltage suppression device, base mount. The varistors covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part or Identification Number (PIN) (see 6.1). The PIN shall be AA5556401- (plus a dash number from table I). Complete PIN example: AA5556401-001.

AA55564	01	-001
Abbreviated CID number	Applicable CID sheet (two digits)	Dash number (see applicable CID sheet)

3. SALIENT CHARACTERISTICS

3.1 Power rating. The power rating for the varistor shall be 1.0 watt.

3.2 Voltage rating. The voltage rating shall be as specified in table I.

3.3 Energy rating. The energy rating shall be as specified in table I.

3.4 Peak current. The peak current shall be as specified in table I.

3.5 Clamping voltage. The clamping voltage shall be as specified in table I.

3.6 Capacitance. The capacitance shall be as specified in table I.

3.7 Operating ambient temperature. The operating ambient temperature shall be -55°C to +85°C.

3.8 Storage temperature. The storage temperature shall be -55°C to +125°C.

3.9 Configuration and dimensions. The varistors supplied to this CID shall be as specified herein (see figure 1).

3.10 Marking. The varistors supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-5257, or facsimile (FAX) (513) 296-8868.

AMSC N/A FSC 5905

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE I. Rating and characteristics.

CID dash number	Voltage rating (max) (rms dc)	Energy (max) (joules)	Peak current (amperes)	Nominal varistor voltage (V)	Max clamping voltage at test current (V) (I)	Typical capacitance (picofarads)
001	130 175	70	6500	200 +43 -16	360 100	1900
002	130 175	70	"	200 +20 -16	325 100	1900
003	150 200	80	"	240 +44 -28	420 100	1600
004	150 200	80	"	240 +3 -28	360 100	1600
005	250 330	130	"	390 +63 -36	675 100	1000
006	250 330	130	"	390 +23 -36	620 100	1000
007	275 369	140	"	430 +64 -41	740 100	900
008	275 369	140	"	430 +23 -41	680 100	900
009	320 420	160	"	510 +55 -48	850 100	750
010	320 420	160	"	510 +30 -48	800 100	750
011	420 560	170	"	680 +110 -70	1160 100	600
012	420 560	170	"	680 +10 -70	1050 100	600
013	480 640	180	"	750 +110 -80	1280 100	550
014	480 640	180	"	750 +40 -80	1160 100	550
015	510 675	190	"	820 +143 -85	1410 100	500

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

016	510 675	190	"	820 +40 -85	1280 100	500
017	575 730	220	"	910 +140 - 105	1560 100	450
018	575 730	220	"	910 +50 -105	1410 100	450
019	660 850	250	"	1050 +160 - 110	1820 100	400
020	660 850	250	"	1050 +50 - 110	1650 100	400

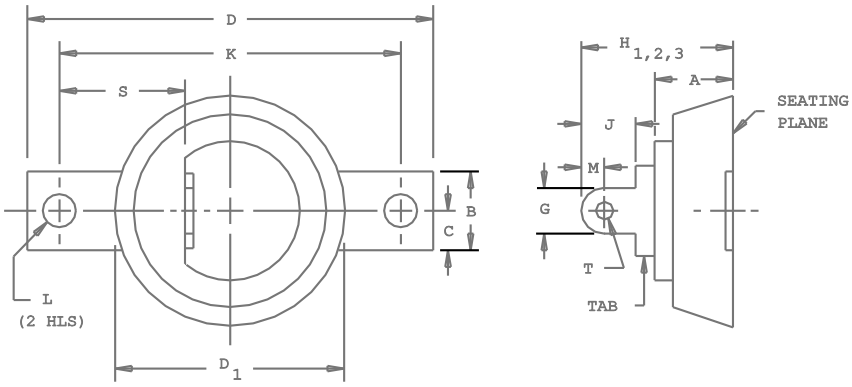

Dimensions					
Symbol	Inches		Millimeters		Notes
	Min	Max	Min	Max	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

A	-	.57	-	14.5	
B	.498	.508	12.5	12.90	
C	-	.26	-	6.6	
D	-	2.61	-	66.3	
D_1	-	1.32	-	33.5	
G	.248	.260	6.30	6.60	
H_1	-	1.01	-	25.7	
H_2	-	1.12	-	28.4	
H_3	-	1.29	-	32.8	
J	-	.32	-	8.1	
K	1.99	2.01	50.5	51.1	
L	.22	.24	5.6	6.1	
M	.155	.165	3.94	4.19	
S	.72	.78	18.3		
T	.118	.122	3.00		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.