[INCH-POUND]
A-A-55564/2
28 November 1995

COMMERCIAL ITEM DESCRIPTION

RESISTOR, VOLTAGE SENSITIVE (VARISTOR), METAL-OXIDE, HIGH ENERGY

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for a transient voltage suppression device, heavy duty, metal-oxide. The varistors covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part Identification Number (PIN) (see 6.1). The PIN shall be AA5556402- (plus a dash number from table I). Complete PIN example: AA5556402-001.

AA55564	02	-001
Abbreviated CID number	Applicable CID sheet (two digits)	Dash number (see applicable CID sheet)

3. SALIENT CHARACTERISTICS.

3.1 Power rating. The power rating for the varistor shall be 2.0 watts.

3.2 Voltage rating. The voltage rating shall be as specified in table I.

3.3 Energy rating. The energy rating shall be as specified in table I.

3.4 Peak current. The peak current shall be as specified in table I.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-5257, or facsimile (FAX) (513) 296-8868.

AMSC N/A FSC 5905

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

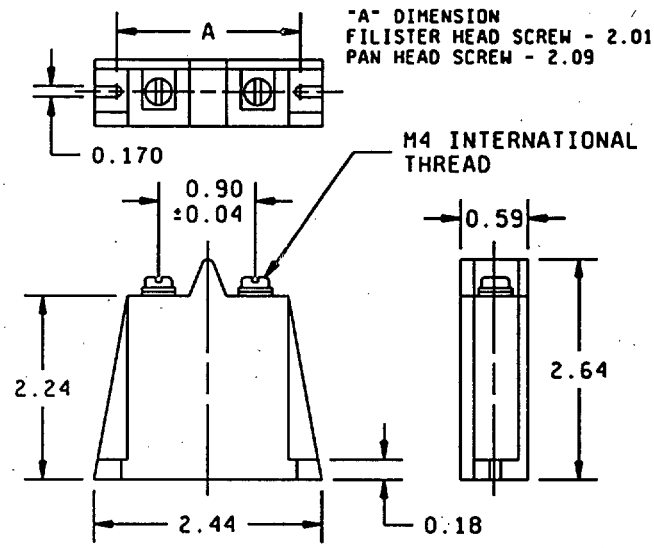


Figure 1. Dash numbers 001 through 011.

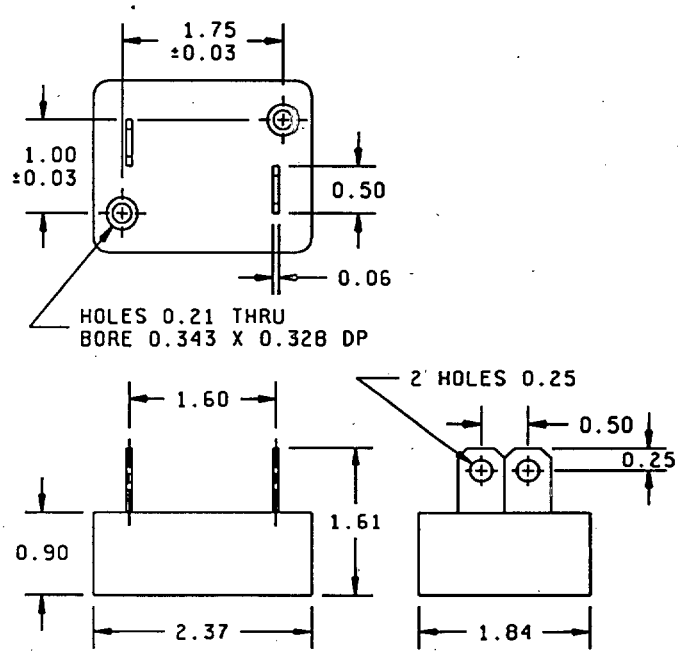


Figure 2. Dash numbers 012 through 022.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE I. Rating and characteristics.

CID dash number	Voltage rating (max) (rms dc)	Energy (max) (joules)	Peak current (amperes)	Nominal varistor voltage (V)	Max clamping voltage at test current (V) (I)	Typical capacitance (picofarads)
001	130 175	270	30,000	200 +28 -16	345 200	10000
002	150 200	300	30,000	240 +28 -28	405 200	8000
003	250 330	370	30,000	390 +39 -36	650 200	5000
004	275 369	400	30,000	430 +43 -41	730 200	4500
005	320 420	460	30,000	510 +29 -48	830 200	3800
006	420 560	600	40,000	680 +68 -70	1130 200	3000
007	480 640	650	40,000	750 +75 -80	1240 200	2700
008	510 675	700	40,000	820 +90 -85	1350 200	2500
009	575 730	770	40,000	910 +90 -105	1480 200	2200
010	660 850	900	40,000	1050 +110 -110	1720 200	2000
011	750 970	1050	40,000	1200 +120 -120	2000 200	1800
012	130 175	270	30,000	200 +28 -16	345 200	10000
013	150 200	300	30,000	240 +28 -28	405 200	8000
014	250 330	370	30,000	390 +39 -36	650 200	5000
015	275 369	400	30,000	430 +43 -41	730 200	4500
016	320 420	460	30,000	510 +29 -48	830 200	3800
017	420 560	600	40,000	680 +68 -70	1130 200	3000
018	480 640	650	40,000	750 +75 -80	1240 200	2700
019	510 675	700	40,000	820 +90 -85	1350 200	2500
020	575 730	770	40,000	910 +90 -105	1480 200	2200
021	660 850	900	40,000	1050 +110 -110	1720 200	2000
022	750 970	1050	40,000	1200 +120 -120	2000 200	1800

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

3.5 Clamping voltage. The clamping voltage shall be as specified in table I.

3.6 Capacitance. The capacitance shall be as specified in table I.

3.7 Operating ambient temperature. The operating ambient temperature shall be -55°C to +85°C.

3.8 Storage temperature. The storage temperature shall be -55°C to +125°C.

3.9 Configuration and dimensions. The varistors supplied to this CID shall be as specified herein (see figure 1 for dash numbers 001 through 011, and see figure 2 for dash number 012 through 022).

3.10 Marking. The varistors supplied to this CID shall be marked with the manufacturer's (MFGR) standard commercial PIN.

4. QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55564.

5. PACKAGING.

5.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES.

6.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See 2 section 2 for PIN format example.

6.2 CAGE code. For ordering purposes, inventory control, and submission of these varistors to DESC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

6.3 Source of document.

Commercial Item Description

A-A-55564 - Resistor, Voltage Sensitive (Varistor).

(Copies of commercial item descriptions are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

6.4 Ordering data. Ordering data shall be as specified in A-A-55564.

6.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

CID dash number (see table I) AA5556402-	Manufacturer's PIN CAGE S6019
001	V131DA40
002	V151DA40
003	V251DA40
004	V271DA40
005	V321DA40
006	V421DA40
007	V481DA40
008	V511DA40
009	V571DA40
010	V661DA40
011	V751DA40
012	V131DB40
013	V151DB40
014	V251DB40
015	V271DB40
016	V321DB40
017	V421DB40
018	V481DB40
019	V511DB40
020	V571DB40
021	V661DB40
022	V751DB40

MFGR's CAGE

S6019

MFGR's name and address

Harris Corp.
Semiconductor Sector
Route 202
Somerville, NY 08876-0591

Manufactured by

Harris Corp.-ECCO, Ltd.
The Demesne
Dundalk, County Loutch
Republic of Ireland

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

6.6 Government users. To acquire information on obtaining these varistors from the Government inventory system, contact Defense Electronics Supply Center, ATTN: DESC-EOP, 1507 Wilmington Pike, Dayton, OH 45444-5517, or telephone (513) 296-6141.

MILITARY INTERESTS:

Custodians

Navy - EC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-ES

Project 5905-D346

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.