[INCH-POUND]
A-A-55567/1A
12 December 2000
SUPERSEDING
A-A-55567/1
1 April 1996

COMMERCIAL ITEM DESCRIPTION

CAPACITOR, ALUMINUM ELECTROLYTIC, LARGE CAN, SCREW TERMINAL

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for large can, screw terminal aluminum electrolytic capacitors. Capacitors covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 6.1).

AA55567	/1	-001	S
Abbreviated CID number	Applicable CID sheet (one digit)	Dash number (three digits)	S = Sleeved U = Unsleeved

3. SALIENT CHARACTERISTICS.

3.1 Design and construction. Capacitors supplied to this CID shall be as specified herein.

3.2 Terminals. Screw-insert terminals (see figure 1).

3.3 Operating temperature range. -40°C to +85°C.

3.4 Capacitance. See table I.

3.5 Capacitance tolerance. Capacitance tolerance shall be within ±20 percent of the nominal values shown in table I.

3.6 Rated voltage. See table I.

3.7 Marking. Capacitors supplied to this CID shall be marked with the manufacturer's (MFGR) standard commercial PIN.

Beneficial comments recommendations, additions, deletions, clarifications etc. and any data which may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC-VAT, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-0563, or facsimile (FAX) (614) 693-1644.

AMSC N/A FSC 5910
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55567.

5. PACKAGING. Packaging shall be as specified in A-A-55567.

6. NOTES.

6.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format.

6.2 CAGE code. For ordering purposes, inventory control, and submission of these aluminum electrolytic capacitors to DECC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

6.3 Source of documents.

Commercial Item Description

A-A-55567 - Capacitor, Aluminum Electrolytic, General Requirements for.

(Copies of federal specifications and standards are available from the Document Automation and Production Service, Building 4D (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

6.4 Ordering data. Ordering data shall be as specified in A-A-55567.

6.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturer of commercial products. At the time of CID preparation and coordination, this manufacturer was known to have commercial products which would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturer shown.)

MFGR's CAGE	MFGR's name and address
7M138	United Chemi-Con Manufacturing Inc. 185 McNeil Road Lansing, NC 28643-8301

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

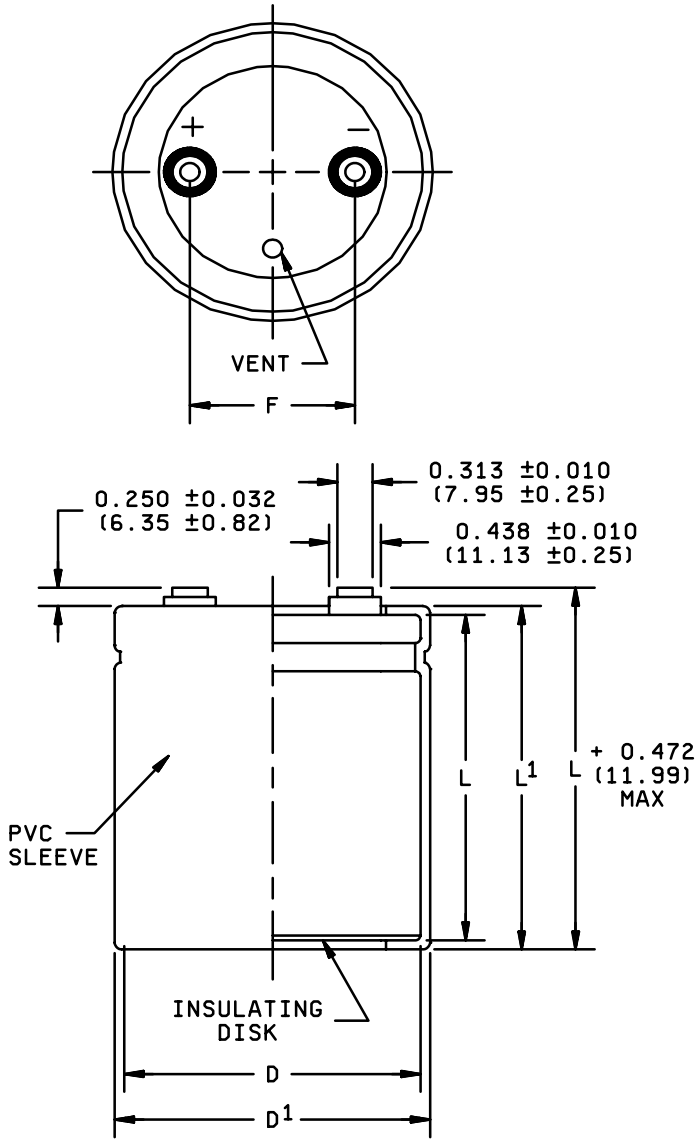

Figure 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Case sizes

Case code	Unsleeved		Sleeved		Terminal spacing F ± 0.016
	D ± 0.032	L ± 0.063	D' Max	L' Max	
AA	1.375	1.625	1.453	1.750	0.500
AB	1.375	2.125	1.453	2.250	0.500
AE	1.375	3.625	1.453	3.750	0.500
AF	1.375	4.125	1.453	4.250	0.500
BA	2.000	1.875	2.078	2.000	0.875
BB	2.000	2.125	2.078	2.250	0.875
BC	2.000	2.625	2.078	2.750	0.875
BD	2.000	3.125	2.078	3.250	0.875
BE	2.000	3.625	2.078	3.750	0.875
BG	2.000	4.625	2.078	4.750	0.875
BH	2.000	5.125	2.078	5.250	0.875
CD	2.500	3.125	2.578	3.250	1.125
CF	2.500	4.125	2.578	4.250	1.125
DE	3.000	3.625	3.078	3.750	1.250
DF	3.000	4.125	3.078	4.250	1.250
DG	3.000	4.625	3.078	4.750	1.250
DH	3.000	5.125	3.078	5.250	1.250
DJ	3.000	5.625	3.078	5.750	1.250
DK	3.000	8.625	3.078	8.750	1.250

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.016	0.41	1.625	41.28	2.625	66.68	4.250	107.95
.032	0.81	1.750	44.45	2.750	69.85	4.625	117.48
.063	1.60	1.875	47.62	3.000	76.20	4.750	120.65
.500	12.70	2.000	50.80	3.078	78.18	5.125	130.18
.875	22.22	2.078	52.78	3.125	79.38	5.250	133.35
1.125	28.58	2.125	53.98	3.250	82.55	5.625	142.88
1.250	31.75	2.250	57.15	3.625	92.08	5.750	146.05
1.375	34.92	2.500	63.50	3.750	95.25	8.625	219.08
1.453	36.91	2.578	65.48	4.125	104.78	8.750	222.25

NOTE: Dimensions are in inches. Metric equivalents are based on 1 inch = 25.4 mm.

Figure 1. Configuration and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

CID PIN AA55567/1- 1/	Capacitance ± 20 percent µF	Maximum ESR at +25°C, 120 Hz mΩ	Maximum ripple current at +85°C, 120 Hz A rms	Case code
6.3 V dc		8 V dc surge		
001-	470,000	5.8	17.95	BG
002-	680,000	6.5	20.69	CF
003-	1,000,000	7.5	22.10	DF
004-	1,200,000	6.8	24.59	DG
005-	1,500,000	5.6	29.17	DJ
006-	2,200,000	3.9	41.67	DK
10 V dc		13 V dc surge		
007-	270,000	7.4	13.07	BE
008-	390,000	5.7	16.35	BG
009-	560,000	6.3	18.77	CF
010-	680,000	8.9	18.43	DE
011-	820,000	7.7	21.39	DF
012-	1,000,000	6.0	23.50	DH
013-	1,200,000	5.7	26.84	DJ
014-	1,800,000	4.0	37.69	DK
16 V dc		20 V dc surge		
015-	220,000	8.7	12.59	CD
016-	270,000	5.9	15.71	BG
017-	390,000	6.3	18.91	CF
018-	470,000	8.7	19.11	DE
019-	560,000	7.5	22.05	DF
020-	680,000	6.3	22.91	DG
021-	680,000	5.7	25.06	DH
022-	820,000	5.6	25.28	DJ
023-	1,200,000	3.9	34.52	DK
25 V dc		32 V dc surge		
024-	120,000	7.9	14.89	BE
025-	180,000	8.7	13.34	CD
026-	180,000	5.9	15.71	BG
027-	270,000	6.3	18.44	CF
028-	330,000	8.2	19.61	DE
029-	390,000	7.8	22.54	DF
030-	470,000	6.4	24.52	DG
031-	560,000	5.7	26.73	DJ
032-	820,000	3.9	38.03	DK
35 V dc		44 V dc surge		
033-	100,000	8.0	11.09	BE
034-	120,000	9.1	11.34	CD
035-	120,000	6.1	12.83	BG
036-	180,000	6.7	15.68	CF
037-	220,000	8.9	16.73	DE
038-	270,000	7.8	19.58	DF
039-	330,000	6.0	22.72	DH
040-	390,000	5.7	24.75	DJ
041-	560,000	3.9	35.94	DK

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

CID PIN AA55567/1- 1/	Capacitance ± 20 percent µF	Maximum ESR at +25°C, 120 Hz mΩ	Maximum ripple current at +85°C, 120 Hz A rms	Case code
50 V dc		63 V dc surge		
042-	56,000	8.3	11.90	BE
043-	68,000	9.0	12.06	CD
044-	82,000	6.3	15.20	BG
045-	120,000	6.6	15.71	CF
046-	120,000	8.3	14.86	DE
047-	150,000	7.3	16.74	DF
048-	180,000	6.6	18.42	DG
049-	220,000	6.2	20.04	DH
050-	390,000	4.0	31.15	DK
63 V dc		79 V dc surge		
051-	4,700	52.8	2.99	AA
052-	8,200	31.2	4.17	AB
053-	12,000	25.2	5.24	BA
054-	15,000	19.8	6.21	BB
055-	18,000	15.5	7.14	AE
056-	22,000	13.2	8.22	AF
057-	22,000	13.8	7.91	BC
058-	33,000	11.2	9.85	BD
059-	39,000	8.7	11.62	BE
060-	47,000	9.3	11.86	CD
061-	56,000	6.7	14.74	BG
062-	82,000	6.8	15.60	CF
063-	100,000	9.1	14.20	DE
064-	120,000	7.9	16.10	DF
065-	150,000	6.2	19.88	DH
066-	180,000	5.9	21.42	DJ
067-	270,000	4.1	31.94	DK
80 V dc		100 V dc surge		
068-	39,000	7.4	15.07	CF
069-	47,000	8.7	14.52	DE
070-	56,000	7.5	16.51	DF
071-	68,000	6.7	18.28	DG
072-	82,000	6.2	19.88	DH
073-	120,000	4.1	31.53	DK
100 V dc		125 V dc surge		
074-	18,000	9.8	12.65	BG
075-	27,000	8.0	14.41	CF
076-	33,000	9.3	14.05	DE
077-	39,000	8.0	16.00	DF
078-	47,000	7.2	17.65	DG
079-	56,000	6.6	19.42	DH
080-	56,000	6.3	25.38	DJ
081-	82,000	4.3	30.41	DK

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

CID PIN AA55567/1- 1/	Capacitance ± 20 percent µF	Maximum ESR at +25°C, 120 Hz mΩ	Maximum ripple current at +85°C, 120 Hz A rms	Case code
160 V dc		200 V dc surge		
082- 083-	27,000 47,000	10.3 6.7	25.17 41.98	DH DK
200 V dc		250 V dc surge		
084- 085-	22,000 33,000	10.8 7.3	22.72 35.17	DH DK
250 V dc		300 V dc surge		
086- 087- 088-	15,000 18,000 27,000	12.6 11.2 7.7	18.76 21.43 31.82	DH DJ DK
315 V dc		365 V dc surge		
089- 090- 091- 092- 093- 094-	4,700 5,600 6,800 8,200 8,200 15,000	46.8 39.4 32.9 27.8 26.5 15.9	9.07 10.46 12.07 13.87 12.33 23.71	DE DF DG DH DJ DK
350 V dc		400 V dc surge		
095- 096-	6,800 12,000	29.6 17.4	14.59 24.49	DH DK
400 V dc		450 V dc surge		
097- 098- 099- 100-	4,700 5,600 6,800 10,000	38.8 32.3 27.1 18.7	11.06 13.24 15.21 22.36	DF DH DJ DK

1/ The complete CID dash number shall include the letter "S" for sleeved case or the letter "U" for unsleeved case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

6.6 Part number (P/N) supersession data. This CID supersedes the following manufacturer's P/Ns as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

CID PIN AA55567/1-	MFGR PIN 1/ CAGE 7M138	CID PIN AA55567/1-	MFGR PIN 1/ CAGE 7M138
001-	U36D6.3LG474M51X117HP	051-	U36D63LG472M35X41HP
002-	U36D6.3LG684M63X105HP	052-	U36D63LG822M35X54HP
003-	U36D6.3LG105M76X105HP	053-	U36D63LG123M51X48HP
004-	U36D6.3LG125M76X117HP	054-	U36D63LG153M51X54HP
005-	U36D6.3LG155M76X143HP	055-	U36D63LG183M35X92HP
006-	U36D6.3LG225M76X219HP	056-	U36D63LG223M35X105HP
007-	U36D10LG274M51X92HP	057-	U36D63LG223M51X67HP
008-	U36D10LG394M51X117HP	058-	U36D63LG333M51X79HP
009-	U36D10LG564M63X105HP	059-	U36D63LG393M51X92HP
010-	U36D10LG684M76X92HP	060-	U36D63LG473M63X79HP
011-	U36D10LG824M76X105HP	061-	U36D63LG563M51X117HP
012-	U36D10LG105M76X130HP	062-	U36D63LG823M63X105HP
013-	U36D10LG125M76X143HP	063-	U36D63LG104M76X92HP
014-	U36D10LG185M76X219HP	064-	U36D63LG124M76X105HP
015-	U36D16LG224M63X79HP	065-	U36D63LG154M76X130HP
016-	U36D16LG274M51X117HP	066-	U36D63LG184M76X143HP
017-	U36D16LG394M63X105HP	067-	U36D63LG274M76X219HP
018-	U36D16LG474M76X92HP	068-	U36D80LG393M63X105HP
019-	U36D16LG564M76X105HP	069-	U36D80LG473M76X92HP
020-	U36D16LG684M76X117HP	070-	U36D80LG563M76X105HP
021-	U36D16LG684M76X130HP	071-	U36D80LG683M76X117HP
022-	U36D16LG824M76X143HP	072-	U36D80LG823M76X130HP
023-	U36D16LG125M76X219HP	073-	U36D80LG124M76X219HP
024-	U36D25LG124M51X92HP	074-	U36D100LG183M51X117HP
025-	U36D25LG184M63X79HP	075-	U36D100LG273M63X105HP
026-	U36D25LG184M51X117HP	076-	U36D100LG333M76X92HP
027-	U36D25LG274M63X105HP	077-	U36D100LG393M76X105HP
028-	U36D25LG334M76X92HP	078-	U36D100LG473M76X117HP
029-	U36D25LG394M76X105HP	079-	U36D100LG563M76X130HP
030-	U36D25LG474M76X117HP	080-	U36D100LG563M76X143HP
031-	U36D25LG564M76X143HP	081-	U36D100LG823M76X219HP
032-	U36D25LG824M76X219HP	082-	U36D160LG273M76X130HP
033-	U36D35LG104M51X92HP	083-	U36D160LG473M76X219HP
034-	U36D35LG124M63X79HP	084-	U36D200LG223M76X130HP
035-	U36D35LG124M51X117HP	085-	U36D200LG333M76X219HP
036-	U36D35LG184M63X105HP	086-	U36D250LG153M76X130HP
037-	U36D35LG224M76X92HP	087-	U36D250LG183M76X143HP
038-	U36D35LG274M76X105HP	088-	U36D250LG273M76X219HP
039-	U36D35LG334M76X130HP	089-	U36D315LG472M76X92HP
040-	U36D35LG394M76X143HP	090-	U36D315LG562M76X105HP
041-	U36D35LG564M76X219HP	091-	U36D315LG682M76X117HP
042-	U36D50LG563M51X92HP	092-	U36D315LG822M76X130HP
043-	U36D50LG683M63X79HP	093-	U36D315LG822M76X143HP
044-	U36D50LG823M51X117HP	094-	U36D315LG153M76X219HP
045-	U36D50LG124M63X105HP	095-	U36D350LG682M76X130HP
046-	U36D50LG124M76X92HP	096-	U36D350LG123M76X219HP
047-	U36D50LG154M76X105HP	097-	U36D400LG472M76X105HP
048-	U36D50LG184M76X117HP	098-	U36D400LG562M76X130HP
049-	U36D50LG224M76X130HP	099-	U36D400LG682M76X143HP
050-	U36D50LG394M76X219HP	100-	U36D400LG103M76X219HP

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the corresponding CID PIN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

6.7 Government users. To acquire information on obtaining these retainers from the Government inventory system, contact the Defense Supply Center, Columbus, ATTN: DSCC-CPC , Post Office Box 3990, Columbus OH 43216-5000, or telephone (614)692-7583

MILITARY INTERESTS:

Custodians:
Navy - EC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA - CC

Project 5910-2109-01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.