INCH-POUND
A-A-55568/2B
28 September 2007
SUPERSEDING
A-A-55568/2A
12 May 1998

COMMERCIAL ITEM DESCRIPTION

HEADSET-MICROPHONE, MONAURAL, LIGHTWEIGHT, INTRA-AURAL, UNAMPLIFIED RECEIVER

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring monaural, lightweight, intra-aural, amplified receiver headsets described herein shall consist of this document and the issue in effect of A-A-55568.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

AA55568/2	-	01		E
CID PIN		Dash number (see table I & II)		Ear tip kit as required (see table II)

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Headset-microphone supplied to this CID specification sheet shall be as specified herein. Incorporate a non noise-canceling and a noise-canceling configuration (see figures 1 and 2).

Alternate design and construction. See figure 1 and 2 illustrating the headset-microphone incorporating a quick-disconnect connector.

Configurations and dimensions. Configurations and dimensions shall be as specified on figure 1.

Voice tube. The headset-microphone with non-noise-canceling shall be supplied with an adjustable acoustic voice tube (see figure 1).

Noise-canceling microphone. The headset-microphone with noise-canceling shall be supplied with a unidirectional microphone (see figure 1).

Quick-disconnect assembly. The headset-microphone shall be supplied with a four (4) contact quick-disconnect connectors (1/) between the headset and the lockable/non-lockable push-to-talk switch.

1/ Referenced quick-disconnect is of the design of each manufacturer of each headset assembly. The intent is to offer an alternate assembly design for the complete headset-microphone and not to be intermixed between manufacturers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Clothing clip. The headset-microphone shall be supplied with a clothing clip.

Switch. The headset-microphone shall be supplied with a lockable/nonlockable push-to-talk switch.

Plug termination. The plug termination shall be a MIL-P-642/9, type PJ-327 or equivalent configuration.

Ear tip Kit. A kit, providing a variety of sizes of ear tips, is provided by some manufacturers with the headset-microphone and some manufacturers provide a universal ear tip (see table II).

Wiring diagram. The wiring diagram shall be as specified on figure 2.

Cable assemblies. The cable assemblies shall be as specified in table I.

Frequency range. The frequency range for the headset shall be 300 to 3300 Hz.

Electrical characteristics.

Receiver.

Output level. The receiver output level shall be 75.5 ±4 dB SPL (12.6 mV rms through 600 ohms).

Distortion. Distortion for the headset shall be less than 5 percent.

Receiver impedance. The receiver impedance shall be 600 ohms nominal.

Microphone.

Output level. The output level shall be -22.5 dB V ±4 dB V (47 to 119 mV rms).

(NOTE: All transmit measurements are made with 94 dB SPL drive at 1000 Hz into a 50 ohm resistive load at 100 mA dc. Also 0 dB m = 1 milliwatt; 0 dB SPL = .0002 dynes/cm^2; 0 dB V = 1 volt.)

DC resistance. The dc resistance shall be greater than 35 ohms.

Terminal voltage. Terminal voltage shall be 4.7 V dc at 100 mA.

Microphone impedance. Microphone impedance shall be 50 ohms nominal.

Polarity. The microphone shall be nonpolar.

Marking. Headsets supplied to this CID shall be marked with the manufacturer's (MFR) standard commercial PIN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

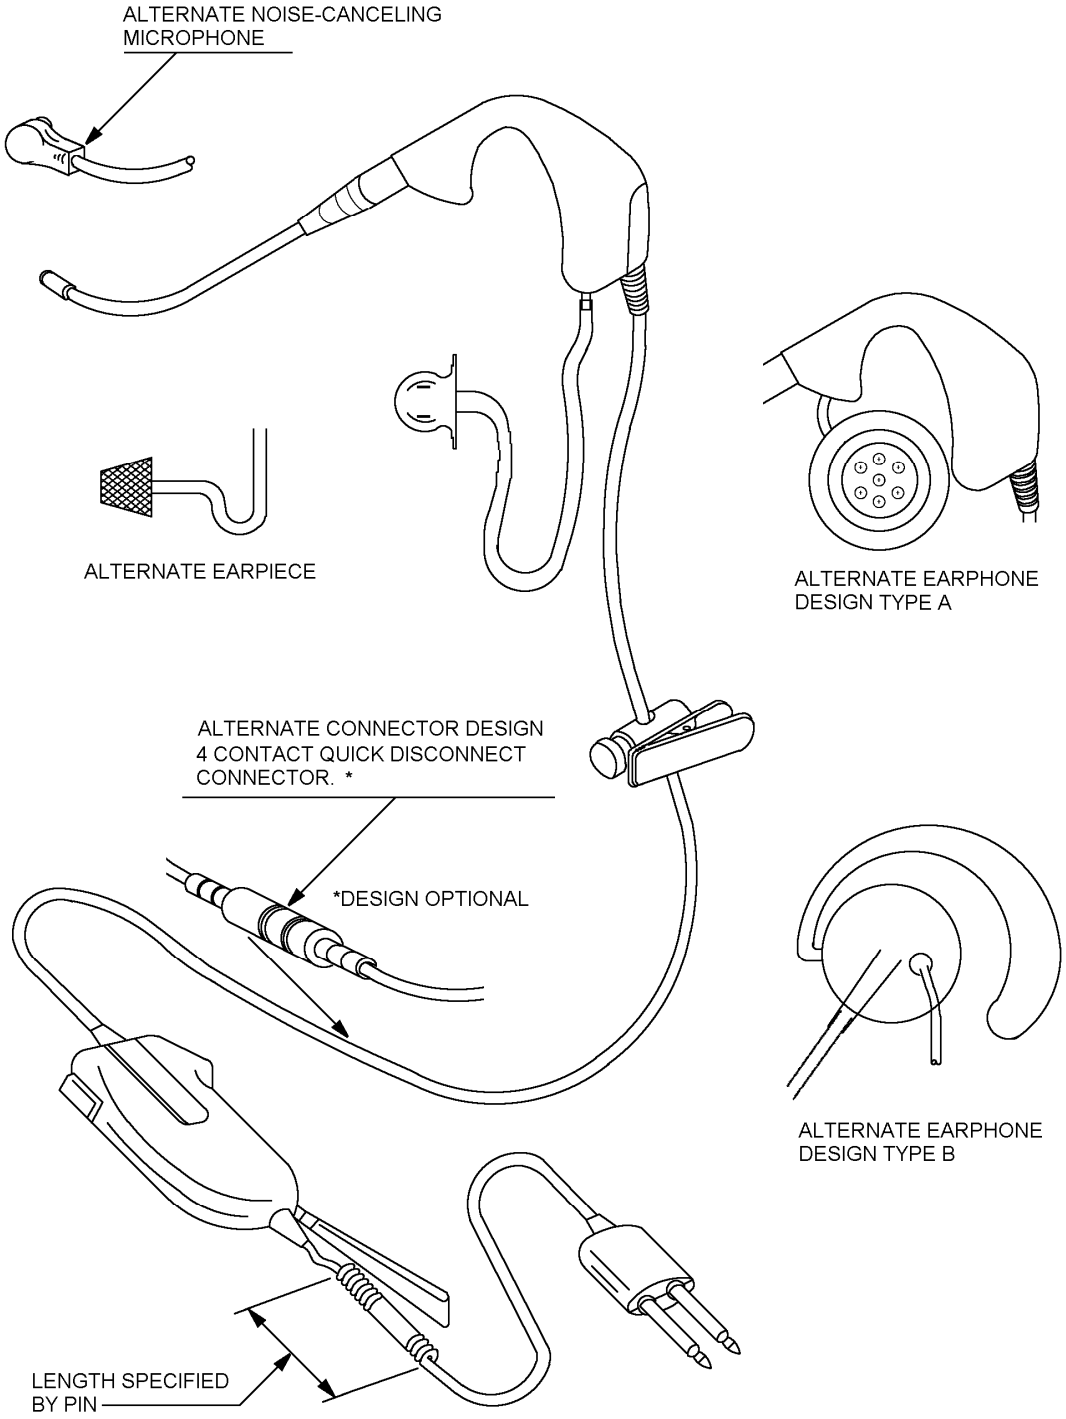


FIGURE 1. Unamplified headset-microphone configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

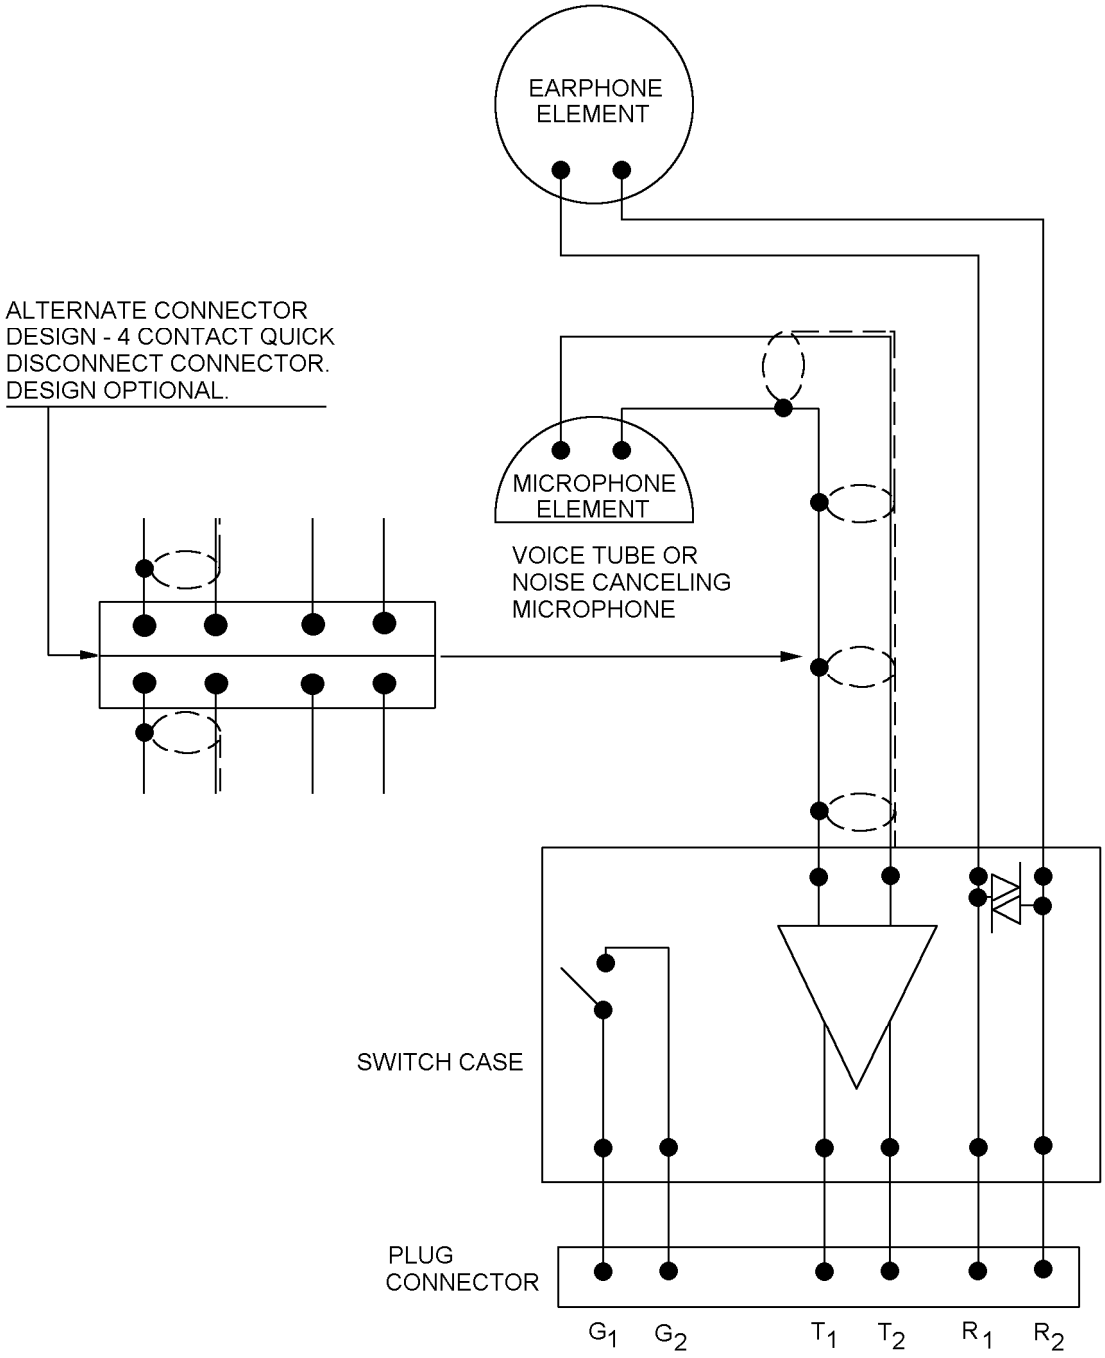


FIGURE 2. Unamplified headset-microphone wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE I. Cable assembly characteristics.

PIN AA55568/2	Characteristics
01	Headset-microphone with non-noise-canceling voice tube design. The length of the coiled portion of the connector cable assembly shall be 50.8 centimeters (20 inches) nominal when retracted and 3.05 meters (10 feet) nominal when extended. (reference Fig. 1)
02	Headset-microphone with non-noise-canceling voice tube design. The length of the coiled portion of the connector cable assembly shall be 76.2 centimeters (30 inches) nominal when retracted and 4.57 meters (15 feet) nominal when extended. (reference Fig. 1)
03	Headset-microphone with non-noise-canceling voice tube design. The length of the coiled portion of the connector cable assembly shall be 127 centimeters (50 inches) nominal when retracted and 7.62 meters (25 feet) nominal when extended. (reference. Fig. 1)
04	Headset-microphone with noise-canceling unidirectional microphone design. The length of the coiled portion of the connector cable assembly shall be 50.8 centimeters (20 inches) nominal when retracted and 3.05 meters (10 feet) nominal when extended. (reference Fig. 1)
05	Headset-microphone with noise-canceling unidirectional microphone design. The length of the coiled portion of the connector cable assembly shall be 76.2 centimeters (30 inches) nominal when retracted and 4.57 meters (15 feet) nominal when extended. (reference Fig. 1)
06	Headset-microphone with noise-canceling unidirectional microphone design. The length of the coiled portion of the connector cable assembly shall be 127 centimeters (50 inches) nominal when retracted and 7.62 meters (25 feet) nominal when extended. (reference Fig. 1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55568.

PACKAGING. Packaging shall be as specified in A-A-55568.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

COMMERCIAL ITEM DESCRIPTION

A-A-55568 - Headset-microphone, Lightweight, General Requirements for.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-P-642/9 - PLUGS, TELEPHONE (TYPE PJ-327) AND ACCESSORY SCREWS

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
22447	Plantronics Inc. 345 Encinal Street Santa Cruz, CA 95060 800-544-4660 www.plantronics.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. These CID specification sheet PINs supersedes the following MFR's P/Ns as shown. This information is being provided to assist in reducing proliferation in the government inventory system (see table II). Dash numbers are to be supplied under this CID as a complete assembly. The separate P/Ns are supplied for information purposes only. When indicated in the PIN (i.e. AA55568/2-01E, etc.), an ear tip kit of the P/N shown will also be provided.

TABLE II. PIN supersession data.

Dash number (see table 1) AA55568/2-	MFR's CAGE	MFR's P/N 1/	MFR's Ear tip kit P/N 2/
01	22447	H31CD w/ SHS1890-10	N/A
01E	22447	H31CD w/ SHS1890-10	06448-00
02	22447	H31CD w/ SHS1890-15	N/A
02E	22447	H31CD w/ SHS1890-15	06448-00
03	22447	H31CD w/ SHS1890-25	N/A
03E	22447	H31CD w/ SHS1890-25	06448-00
04	22447	H31N w/ SHS1890-10	N/A
04E	22447	H31N w/ SHS1890-10	06448-00
05	22447	H31N w/ SHS1890-15	N/A
05E	22447	H31N w/ SHS1890-15	06448-00
06	22447	H31N w/ SHS1890-25	N/A
06E	22447	H31N w/ SHS1890-25	06448-00

1/ The separate P/N are supplied for information purposes only.
2/ Ear tip kit P/N if provided by a manufacturer.

Government users. To acquire information on obtaining these headset-microphones from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CCAB, 3990 East Broad Street, Columbus, OH 43216-5000, or telephone (614) 692-7992.

NSNs. The following is a list of NSNs assigned which correspond to this CID specification sheet (see table III). The list is for information only and may not be indicative of all possible NSNs associated with the CID specification sheet. For up to date information on assigned NSNs, please contact the Defense Supply Center, Columbus, ATTN: DSCC-CCAB, 3990 East Broad Street, Columbus, OH 43216-5000, or telephone (614) 692-7992.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE III. NSN list.

Dash number (see table I) AA55568/2-	NSN
01	5965-01-371-8031
02	5965-01-406-6320
03	5965-01-406-6056

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

MILITARY INTERESTS:

Custodians:
Navy - EC
Air Force - 11
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA - CC

Project 5965-0381-002

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.