INCH-POUND
A-A-55568/2C
23 July 2014
SUPERSEDING
A-A-55568/2B
28 September 2007

COMMERCIAL ITEM DESCRIPTION

HEADSET-MICROPHONE, MONAURAL, LIGHTWEIGHT, INTRA-AURAL, UNAMPLIFIED RECEIVER

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring unamplified receiver intra-aural lightweight monaural headset-microphones described herein shall consist of this document and the issue in effect of A-A-55568.

CLASSIFICATION/PART OR IDENTIFYING NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system, which is included in the PIN as shown in the following example (see NOTES).

AA55568/02	-	001		E
CID spec sheet number		Dash number (see tables I & II)		Ear tip kit (as required) (see table II)

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Headset-microphone supplied to this CID specification sheet shall be as specified herein. Incorporate a non-noise-canceling and a noise-canceling configuration (see figures 1 and 2).

Alternate design and construction. See figures 1 and 2 illustrating the headset-microphone incorporating a quick-disconnect connector.

Configurations and dimensions. Configurations and dimensions shall be as specified on figure 1.

Voice tube. The headset-microphone with non-noise-canceling shall be supplied with an adjustable acoustic voice tube (see figure 1).

Noise-canceling microphone. The headset-microphone with noise-canceling shall be supplied with a unidirectional microphone (see figure 1).

Quick-disconnect assembly. The headset-microphone shall be supplied with a four (4) contact quick-disconnect connectors (see note) between the headset and the lockable/non-lockable push-to-talk switch.

NOTE: Referenced quick-disconnect is of the design of each manufacturer of each headset assembly. The intent is to offer an alternate assembly design for the complete headset-microphone and not to be intermixed between manufacturers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Clothing clip. The headset-microphone shall be supplied with a clothing clip.

Switch. The headset-microphone shall be supplied with a lockable/non-lockable push-to-talk switch.

Plug termination. The plug termination shall be a 6-wire PJ7 in accordance with drawing 182513 (CAGE 08125, see -105, on sheets 12 and 13) or equivalent configuration.

Ear tip Kit. A kit, providing a variety of sizes of ear tips, is provided by some manufacturers with the headset-microphone and some manufacturers provide a universal ear tip (see table II).

Wiring diagram. The wiring diagram shall be as specified on figure 2.

Cable assemblies. The cable assemblies shall be as specified in table I.

Frequency range. The frequency range for the headset shall be 300 to 3300 Hz.

Electrical characteristics.

Receiver.

Output level. The receiver output level shall be 75.5 ± 4 dB SPL (12.6 mV rms through 600 ohms).

Distortion. Distortion for the headset shall be less than 5 percent.

Receiver impedance. The receiver impedance shall be 600 ohms nominal.

Microphone.

Output level. The output level shall be - 22.5 dB V ± 4 dB V (47 to 119 mV rms).

(NOTE: All transmit measurements are made with 94 dB SPL drive at 1,000 Hz into a 50 ohm resistive load at 100 mA dc. Also, 0 dB m = 1 milliwatt; 0 dB SPL = 20 micropascal's (µPA) (0.0002 dynes/cm^2); 0 dB V = 1 volt.)

DC resistance. The dc resistance shall be greater than 35 ohms.

Terminal voltage. Terminal voltage shall be 4.7 V dc at 100 mA.

Microphone impedance. Microphone impedance shall be 50 ohms nominal.

Polarity. The microphone shall be non-polar.

Marking. Headsets supplied to this CID shall be marked with the manufacturer's (MFR) standard commercial PIN. (NOTE: The part number marked on the unit pack shall be the CID PIN.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

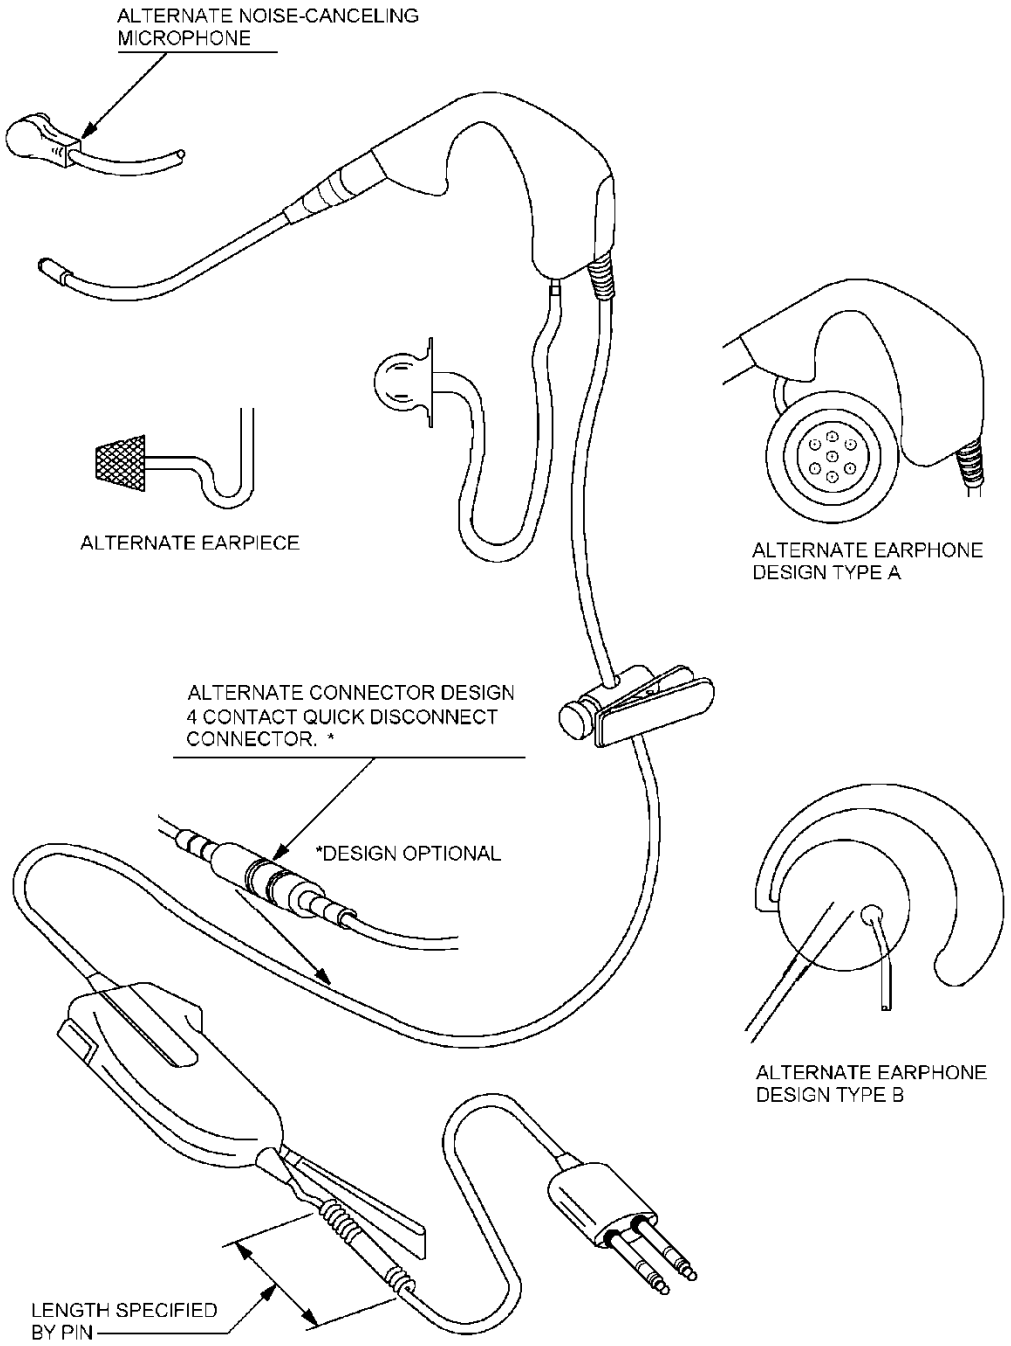


FIGURE 1. Unamplified headset-microphone configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

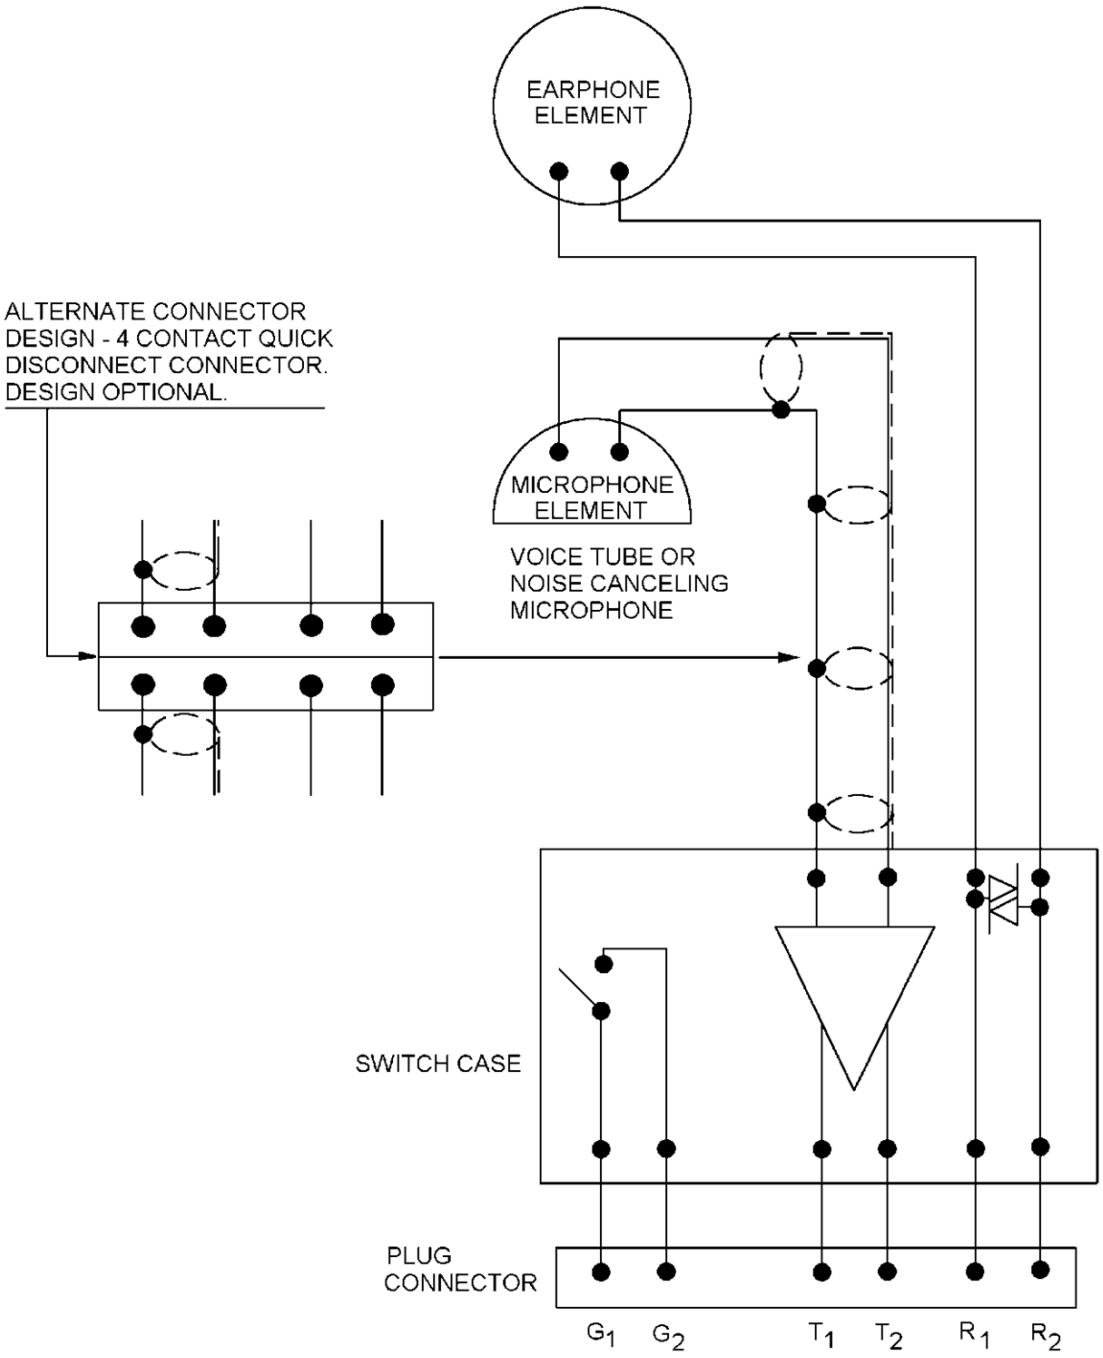


FIGURE 2. Unamplified headset-microphone wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE I. Cable assembly characteristics.

PIN AA55568/02	Characteristics
001	Headset-microphone with non-noise-canceling voice tube design. The length of the coiled portion of the connector cable assembly shall be 50.8 centimeters (20 inches) nominal when retracted and 3.05 meters (10 feet) nominal when extended. (reference Fig. 1)
002	Headset-microphone with non-noise-canceling voice tube design. The length of the coiled portion of the connector cable assembly shall be 76.2 centimeters (30 inches) nominal when retracted and 4.57 meters (15 feet) nominal when extended. (reference Fig. 1)
003	Headset-microphone with non-noise-canceling voice tube design. The length of the coiled portion of the connector cable assembly shall be 127 centimeters (50 inches) nominal when retracted and 7.62 meters (25 feet) nominal when extended. (reference. Fig. 1)
004	Headset-microphone with noise-canceling unidirectional microphone design. The length of the coiled portion of the connector cable assembly shall be 50.8 centimeters (20 inches) nominal when retracted and 3.05 meters (10 feet) nominal when extended. (reference Fig. 1)
005	Headset-microphone with noise-canceling unidirectional microphone design. The length of the coiled portion of the connector cable assembly shall be 76.2 centimeters (30 inches) nominal when retracted and 4.57 meters (15 feet) nominal when extended. (reference Fig. 1)
006	Headset-microphone with noise-canceling unidirectional microphone design. The length of the coiled portion of the connector cable assembly shall be 127 centimeters (50 inches) nominal when retracted and 7.62 meters (25 feet) nominal when extended. (reference Fig. 1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55568.

PACKAGING. Packaging shall be as specified in A-A-55568.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

CAGE code. For ordering purposes, inventory control, and submission of these headset-microphones to DLA Land and Maritime under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

Source of documents.

COMMERCIAL ITEM DESCRIPTION

A-A-55568 - Headset-microphone, Lightweight, General Requirements for.

(Copies of these documents are available online at http://quicksearch.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

DEPARTMENT OF TRANSPORTATION (FAA, CAGE 08125, replacing 0TW64)

182513 - Cable, Patch Cord

(Copies of this document required by contractors in connection with specific acquisition functions may be obtained from the procuring activity at DSCC.cddwgs@dla.mil, or as directed by the contracting officer.)

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
22447	Plantronics Inc. 345 Encinal Street Santa Cruz, CA 95060 800-544-4660 www.plantronics.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. These CID specification sheet PINs supersede the following MFR's P/Ns as shown. This information is being provided to assist in reducing proliferation in the government inventory system (see table II). Dash numbers are to be supplied under this CID as a complete assembly. The separate P/Ns are supplied for information purposes only. When indicated in the PIN (i.e. AA55568/02-001E, etc.), an ear tip kit of the P/N shown will also be provided.

TABLE II. PIN supersession data.

Dash number (see table 1) AA55568/02-	MFR's CAGE	MFR's P/N 1/	MFR's Ear tip kit P/N 2/
001	22447	H31CD w/ SHS1890-10	N/A
001E	22447	H31CD w/ SHS1890-10	06448-00
002	22447	H31CD w/ SHS1890-15	N/A
002E	22447	H31CD w/ SHS1890-15	06448-00
003	22447	H31CD w/ SHS1890-25	N/A
003E	22447	H31CD w/ SHS1890-25	06448-00
004	22447	H31CDN w/ SHS1890-10	N/A
004E	22447	H31CDN w/ SHS1890-10	06448-00
005	22447	H31CDN w/ SHS1890-15	N/A
005E	22447	H31CDN w/ SHS1890-15	06448-00
006	22447	H31CDN w/ SHS1890-25	N/A
006E	22447	H31CDN w/ SHS1890-25	06448-00

1/ The separate P/N are supplied for information purposes only.
2/ Ear tip kit P/N if provided by a manufacturer.

Government users. To acquire information on obtaining these lightweight headset-microphones from the Government inventory system, contact DLA Land and Maritime, ATTN: FMTE, P.O. Box 3990, Columbus, OH 43218–3990 or telephone (614) 692-4023, DSN 850-4023.

NSNs. The following is a list of NSNs assigned which correspond to this CID specification sheet (see table III). The list is for information only and may not be indicative of all possible NSNs associated with the CID specification sheet. For up to date information on assigned NSNs, please contact the DLA Land and Maritime, ATTN: FMTE, P.O. Box 3990, Columbus, OH 43218–3990 or telephone (614) 692-4023, DSN 850-4023.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE III. NSN list.

Dash number (see table I) AA55568/02-	NSN
001	
002	5965-01-474-1625
003	

Changes from previous issue. The margins of this CID are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to A-A-55568, this document references the following:

182513 (CAGE 08125) DEPARTMENT OF TRANSPORTATION DRAWING

MILITARY INTERESTS:

Custodians:
Navy - EC
Air Force - 85
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA - CC

Project 5965-2013-008

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.