[INCH-POUND]
A-A-55569/2A
April 7, 2000
SUPERSEDING
A-A-55569/2
June 3, 1996


COMMERCIAL ITEM DESCRIPTION

FUSE, INCLOSED LINK, FAST ACTING, 2 AMPERES (A) THROUGH 30 A, MINIATURE, AUTOMOTIVE BLADE TYPE

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for fast acting, miniature, automotive blade type, inclosed link fuses rated at 2 A through 30 A. Fuses covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 7.1).

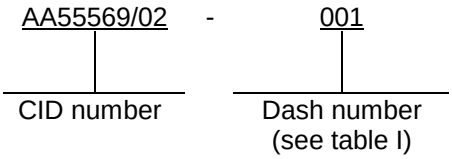

3. SALIENT CHARACTERISTICS.

3.1 Interface and physical dimensions. Fuses supplied to this CID shall be as specified herein and shall meet the requirements of SAE J 2077 for miniature blade type, electrical fuses (see figure 1).

3.2 Ampere rating. The ampere rating shall be as specified in table I.

3.3 Voltage rating. The voltage rating shall be 32 V dc.

3.4 Opening time. The opening time shall be as specified in table II.

3.5 Accommodating fuseholders. Fuses supplied to this CID may be used with fuseholder CIDs A-A-55570/2, or A-A-55570/3.


3.6 Marking. Fuses supplied to this CID shall be marked with the manufacturer's (MFR's) standard commercial PIN.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC-VAT, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-0548, or facsimile (FAX) (614) 692-6939.

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

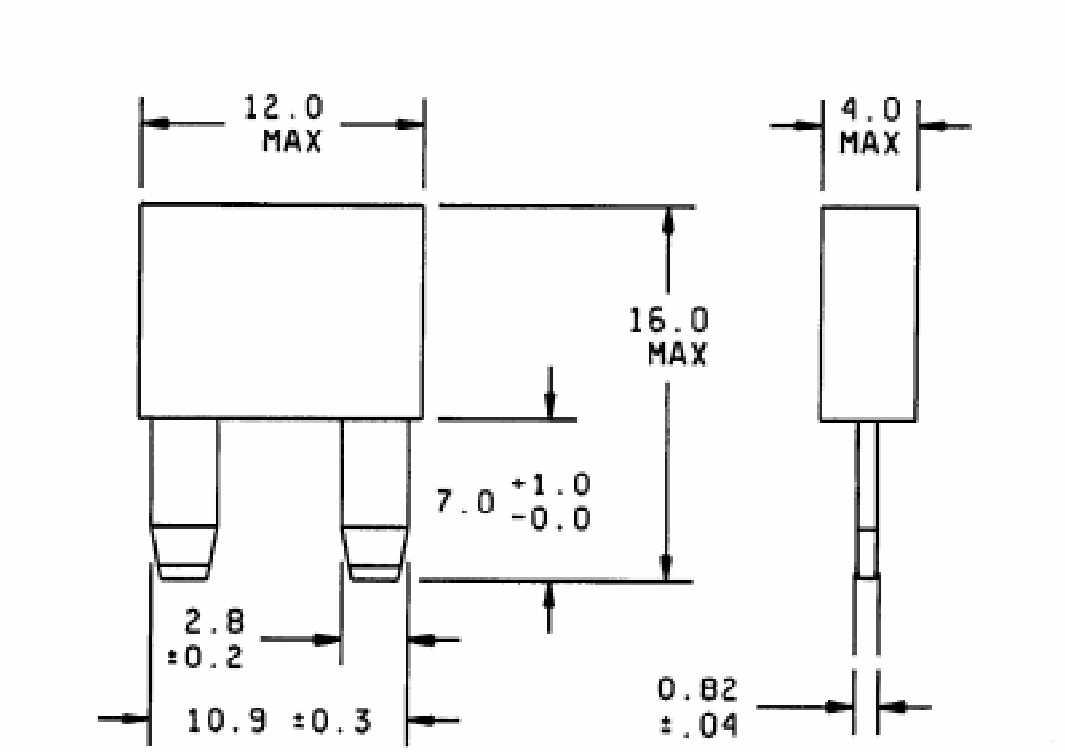

mm	Inches	mm	Inches
0.04	.002	4.0	.157
0.2	.008	7.0	.276
0.3	.012	10.9	.429
0.82	.032	12.0	.472
1.0	.039	16.0	.630
2.8	.110		

NOTES:

1. Dimensions are in millimeters.
2. Tolerance is ± 0.13 mm (0.005 inch), unless otherwise specified.
3. The US Government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

CID dash number AA55569/02-	Ampere rating	Color code 1/
001	2	Grey
002	3	Violet
003	4	Pink
004	5	Tan
005	7.5	Brown
006	10	Red
007	15	Blue
008	20	Yellow
009	25	Natural
010	30	Green

1/ Fuses are color-coded for easy amperage identification.

TABLE II. Rating versus opening time.

Percent of rating	Opening time	
	Minimum	Maximum
100	100 hours	---
135	.75 seconds	1,800 seconds
200	.15 seconds	5 seconds
350	.080 seconds	.5 seconds
600	.030 seconds	.100 seconds

4. REGULATORY REQUIREMENTS. This section is not applicable to this CID sheet.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Market acceptance. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID:

a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 6 months.

b. The company must have sold 1,000 units meeting this CID in the commercial marketplace over the past 6 months.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

6. PACKAGING. Packaging shall be as specified in A-A-55569.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these fuses to DSCC under the Military Parts control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.3 Source of documents.

Commercial Item Description

A-A-55569	-	Fuse, Inclosed Link, Automotive Blade Type, General Requirements for.
A-A-55570/2	-	Fuseholder, Extractor Post, In-Line Crimp Type, Accommodates miniature, Automotive Blade Type, Inclosed Link, Fuses.
A-A-55570/3	-	Fuseholder, Extractor Post, Printed Circuit (PC) Board Mount Type, Accommodates Miniature, Automotive Blade Type, Inclosed Link Fuses.

(Copies of commercial item descriptions are available from the Document Automation and Production Service, Building 4D (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Other Publications

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE J 2077 - Miniature Blade Type Electrical Fuses, Standard.

(Applications for copies should be addressed to the Society of Automotive Engineers, Incorporated, 400 Commonwelath Drive, Warrendale, PA 15096-0001.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

7.4 Ordering data. Ordering data shall be as specified in A-A-55569.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

7.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer's CAGE	Manufacturer's name and address
71400	Cooper Bussmann P.O. Box 14460 St. Louis, MO 63178-4460 (314) 394-2877
75915	Littelfuse Incorporated 800 E. northwest Highway Des Plaines, IL 60016-3096 (824) 824-1188

7.6 Part number (P/N) supersession data. This CID supersedes the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

TABLE II. P/N supersession data.

CID dash number (see table I) AA55569/02-	Vendor commercial PIN CAGE 71400	Vendor commercial PIN CAGE 75915
001	ATM-2	---
002	ATM-3	297003
003	ATM-4	297004
004	ATM-5	297005
005	ATM-7.5	29707.5
006	ATM-10	297010
007	ATM-15	297015
008	ATM-20	297020
009	ATM-25	297025
010	ATM-30	297030

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown.

7.7 Government users. To acquire information on obtaining these fuses from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CS, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-7990.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-CC

Project 5920-D240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.