[INCH-POUND]
A-A-55569/2C
October 5, 2006
SUPERSEDING
A-A-55569/2B
November 23, 2001

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

FUSE, INCLOSED LINK, FAST ACTING, 2 AMPERES (A) THROUGH 30 A, MINIATURE, AUTOMOTIVE BLADE TYPE

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring the inclosed fuse links described herein shall consist of this document and the issue in effect of CID A-A-55569.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

AA55569	/02	-	001
CID number	Applicable CID specification sheet (two digits)		Dash number

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Fuses supplied to this CID specification sheet shall be as specified herein, and shall meet the requirements of SAE J2077 for miniature blade type, electrical fuses (see figure 1).

Ampere rating. The ampere rating shall be as specified in table I.

Voltage rating. The voltage rating shall be 32 V dc maximum.

Opening time. The opening time shall be as specified in table II.

Accommodating fuseholder. Fuses supplied to this CID may be used with fuseholder CIDs A-A-55570/1, or A-A-55570/3.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

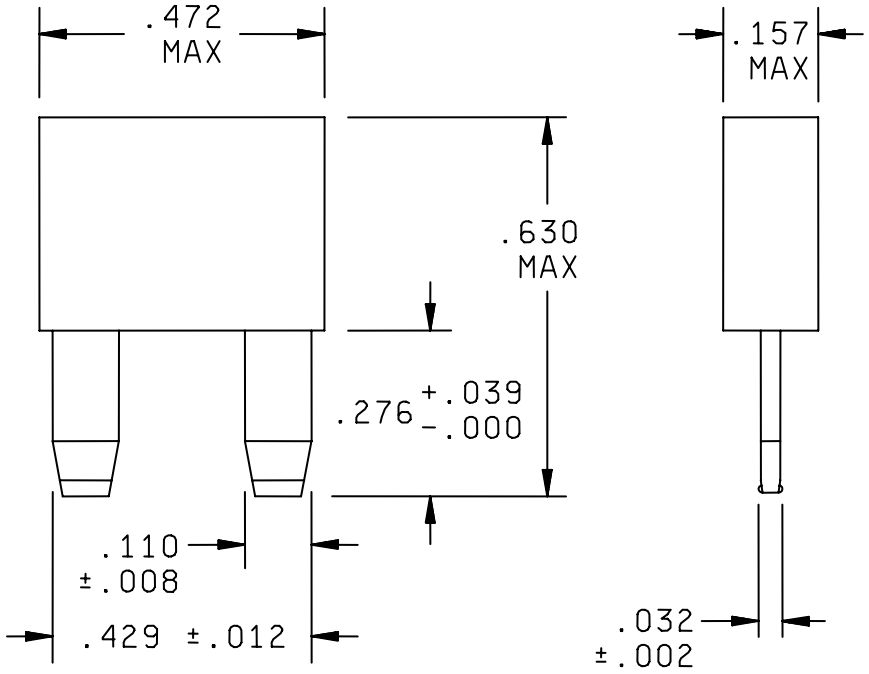

Inches	mm	Inches	mm
.002	0.04	.157	4.0
.008	0.2	.276	7.0
.012	0.3	.429	10.9
.032	0.82	.472	12.0
.039	1.0	.630	16.0
.110	2.8		

NOTES:

1. Dimensions are in inches.
2. Tolerance is ±.005 inch (0.13 mm), unless otherwise specified.

FIGURE 1. Interface and physical dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

CID dash number AA55569/02-	Ampere rating	Color code 1/
001	2	Grey
002	3	Violet
003	4	Pink
004	5	Tan
005	7.5	Brown
006	10	Red
007	15	Blue
008	20	Yellow
009	25	Natural
010	30	Green

1/ Fuses are color-coded for easy amperage identification.

TABLE II. Rating versus opening time.`

Percent of rating	Opening time	
	Minimum	Maximum
100	100 hours	N/A
135	.75 seconds	1,800 seconds
200	.15 seconds	5 seconds
350	0.80 seconds	.5 seconds
600	.030 seconds	.100 seconds

Source of documents.

COMMERCIAL ITEM DESCRIPTION

A-A-55570/1 - Fuseholder, Extractor Post, In-Line Type, Accommodates Fast Acting, Automotive Blade Type, Inclosed Link Fuses.

A-A-55570/3 - Fuseholder, Extractor Post, Printed Circuit (PC) Board Mount Type, Accommodates Miniature, Automotive Blade Type, Inclosed Link Fuses.

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Other Publications

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE J2077 - Miniature Blade Type Electrical Fuses, Standard.

(Copies of this document is available online at http://www.sae.org/ or from the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096-0001.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
71400	Cooper Bussmann, Incorporated P. O. Box 14460 St. Louis, MO 63178-4460 Phone number (636) 394-2877 Facsimile number (800) 544-2570 E-mail: mailto:fusebox@buss.com Uniform Resource Locator (URL): http://www.bussmann.com
75915	Littelfuse Incorporated 800 E. Northwest Highway Des Plaines, IL 60016-3096 Phone number (847) 824-1188 Facsimile number (847) 391-0894 E-mail: mailto:electronics@littelfuse.com URL: http://www.littelfuse.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. These CID specification sheet PINs supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. P/N supersession data.

CID dash number AA55569/02- (see table I)	MFR's CAGE 71400	MFR's P/N 1/ 75915
001	ATM-2	N/A
002	ATM-3	297003
003	ATM-4	297004
004	ATM-5	297005
005	ATM-7.5	29707.5
006	ATM-10	297010
007	ATM-15	297015
008	ATM-20	297020
009	ATM-25	297025
010	ATM-30	297030

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements see the marking paragraph of A-A-55569.

National stock number (NSN). The following is a list of NSN's assigned which correspond to this CID specification sheet. The list is for information only and may not be indicative of all possible NSN's associated with the CID specification sheet. For up to date information on assigned NSN's, please contact the aforementioned DSCC office listed in A-A-55569.

TABLE IV. NSN's.

Dash number (see table I) AA55569/02-	NSN	Dash number (see table I) AA55569/02-	NSN
001	5920-01-414-6432	006	5920-01-414-6439
002	5920-01-197-2570	007	5920-01-414-6434
003	N/A	008	N/A
004	5920-01-414-6983	009	5920-01-414-6436
005	5920-01-414-6437	010	N/A

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5920-2006-080

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.