[INCH-POUND]
A-A-55569/3
June 3, 1996

COMMERCIAL ITEM DESCRIPTION

FUSE, INCLOSED LINK, SLOW BLOWING, 20 AMPERES (A) THROUGH 80 A, AUTOMOTIVE BLADE TYPE

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for slow blowing, automotive blade type, inclosed link fuse rated at 20 A through 80 A. Fuses covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part or Identification Number (PIN) as shown in the following example (see 6.1).

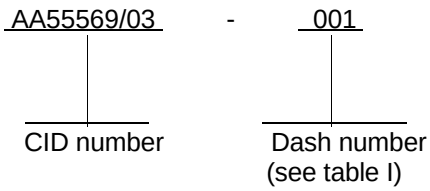

3. SALIENT CHARACTERISTICS.

3.1 Design and construction. Fuses supplied to this CID shall be as specified herein and shall meet the requirements of SAE J1888 for high current time lag electronic fuses (see figure 1).

3.2 Ampere rating. The ampere rating shall be as specified in table I.

3.3 Voltage rating. The voltage rating shall be 32 V dc.

3.4 Opening time. The opening time shall be as specified in table II.

3.5 Marking. Fuses supplied to this CID shall be marked with the manufacturer's (MFGR) standard commercial PIN.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Electronics Supply Center, ATTN: DESC-ELDM 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-6189, or facsimile (FAX) (513) 296-8868.

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

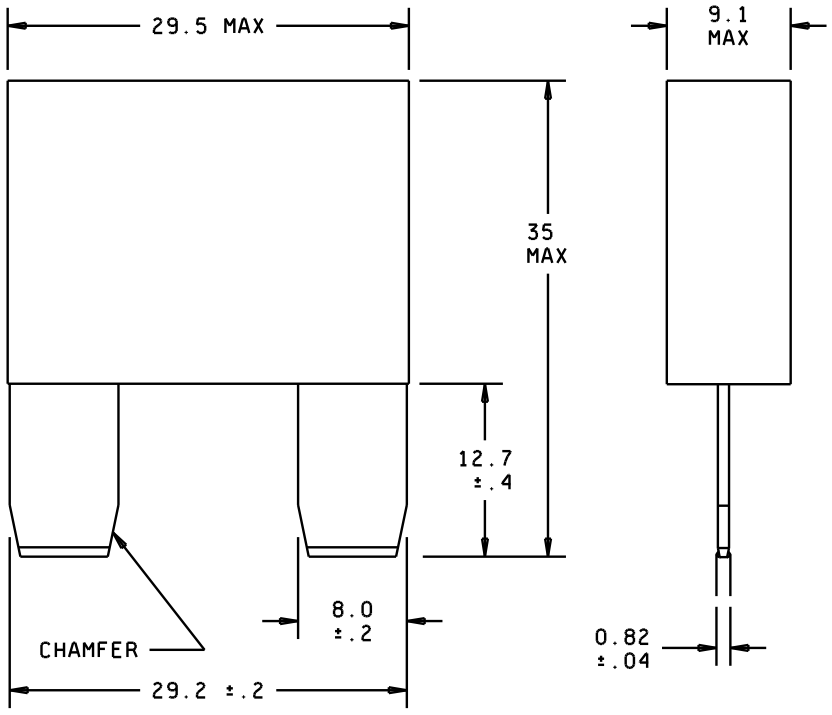

mm	Inches	mm	Inches
0.04	1.016	9.1	0.358
0.2	5.08	12.7	0.5
0.4	10.16	29.2	1.150
0.82	0.032	29.5	1.161
8.0	0.315	35.0	1.378

NOTES:

1. Dimensions are in millimeters.
2. Tolerance is ±0.13 mm (0.005).
3. The U.S. Government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

AA55569/03-	Ampere rating	Color code 1/
001	20	Yellow
002	30	Green
003	40	Amber
004	50	Red
005	60	Blue
006	70	Tan
007	80	Natural

1/ Fuses are color-coded for easy amperage identification.

TABLE II. Rating versus opening time.

Percent of ampere rating	Opening time maximum/minimum (seconds)						
	20 A	30 A	40 A	50 A	60 A	70 A	80 A
135	1,800 60	1,800 60	1,800 60	1,800 60	1,800 60	3,600 60	3,600 60
200	20 4	30 6	40 8	50 10	60 15	60 4	60 4
350	2 .7	4 1	5 1.4	6 1.7	7 2	2 .2	2 .2
600	1 .15	1 .20	1 .20	1 .20	1 .20	.15 .04	.15 .04

4. QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55569.

5. PACKAGING. Packaging shall be as specified in A-A-55569.

6. NOTES.

6.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

6.2 CAGE code. For ordering purposes, inventory control, and submission of these fuses to DESC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

6.3 Source of documents.

Commercial Item Description

A-A-55569 - Fuse, Inclosed Link, Automotive Blade Type, General Requirements for.

(Copies of commercial item descriptions are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

OTHER PUBLICATIONS

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE J 1888 - High Current Time Lag Electric Fuses.

(Applications for copies should be addressed to the Society of Automotive Engineers, Incorporated, 400 Commonwealth Drive, Warrendale, PA 15096-0001.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

6.4 Ordering data. Ordering data shall be as specified in A-A-55569.

6.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following MFGRs of commercial products. At the time of CID preparation and coordination, these MFGRs were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the MFGRs shown.)

MFGR's CAGE	MFGR's name and address
71400	Bussmann Cooper Industries P.O. Box 14460 St. Louis, MO 63178-4460 (314) 527-1253
75915	Littelfuse Incorporated 800 E. Northwest Highway Des Plaines, IL 60016-3096 (312) 824-1188

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

6.6 Part number (P/N) supersession data. This CID supersedes the following MFGRs P/N as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

CID dash number (see table I) AA55569/03-	MFGRs CAGE	MFGRs PIN 1/	MFGRs CAGE	MFGRs PIN 1/
001	71400	MAX-20	75915	299020
002	71400	MAX-30	75915	299030
003	71400	MAX-40	75915	299040
004	71400	MAX-50	75915	299050
005	71400	MAX-60	75915	299060
006	71400	MAX-70	75915	299070
007	71400	MAX-80	75915	299080

1/ The MFGR PIN shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown.

6.7 Government users. To acquire information on obtaining these fuses from the Government inventory system, contact Defense Electronics Supply Center, ATTN: DESC-EOM, 1507 Wilmington Pike, Dayton, OH 45444-5519, or telephone (513) 296-5106.

MILITARY INTERESTS:

Custodians:
Navy - EC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-ES

Project 5920-0536-03

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.