INCH-POUND

A-A-50035A
October 29, 1993
SUPERSEDING
A-A-50035
September 27, 1982

COMMERCIAL ITEM DESCRIPTION

RANGES, ELECTRIC, INDUSTRIAL

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-R-11295.

1. ABSTRACT

1.1 Abstract. This commercial item description covers industrial electric ranges and shall consist of an oven section surmounted by a griddle top or a griddle/hot top as specified. The ranges shall be of the following types and grades:

Type I - Griddle top
  Grade A - Stainless steel exterior

Type II - Griddle/hot top
  Grade A - Stainless steel exterior
  Grade B - Stainless steel front - remaining sides and back shall be carbon steel

1.2 CID based part identification number (PIN). A document based PIN to identify sizes of items is included in section 5. This identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor except as information on "Government unique" data nameplates (see 5.4).

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Commander, U.S. Army Natick Research, Development, and Engineering Center, ATTN: SATNC-WEE, Natick, MA 01760-5018.

AMSC N/A FSC 7310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

2. SALIENT CHARACTERISTICS

2.1 Type I, griddle top. The griddle top shall be 36 inches wide by 24 inches deep (± 1/8 inch) with sides and rear back-splash guards. The range shall have front and rear grease troughs with drains that empty into a grease receptacle. The griddle temperature shall be controlled by a minimum of three thermostats. Each thermostat shall control the temperature of one third of the griddle surface from 175°F to 450°F minimum. The griddle shall be capable of reaching a surface temperature of 400°F in 13 minutes.

2.2 Type II, griddle/hot top. The griddle/hot top shall consist of three dual-purpose hot plates 12 inches wide by 24 inches deep (± 1/8 inch). The three hot plates shall be clamped together into one assembly, 36 inches wide by 24 inches deep. The dual-purpose hot plates shall be suitable for either hot top or griddle top cooking operations. Each hot plate shall be equipped with a thermostat to control the hot plate surface temperature from 250°F to 850°F. The hot plates shall be capable of reaching a surface temperature of 500°F in 20 minutes. The hot plates shall be provided with front and rear grease troughs with drains that empty into a grease receptacle.

2.3 Oven. The oven shall have one slide rack and supports to divide the oven into at least two equal compartments. The oven door shall be hinged at the bottom, counter balanced, and when fully opened shall remain level and even with the oven deck. The oven and door shall be insulated. With the oven empty and the door closed, the oven shall be capable of maintaining a temperature of 450°F with not more than 0.77 KW electrical energy. Two removable elements, one located at the top and one at the bottom shall be provided. Each element shall be controlled by a three-heat indicating switch and a thermostat calibrated from 200°F to 500°F minimum. The oven shall preheat to 450°F in 20 minutes or less.

2.4 Dimensions. The range and oven dimensions are shown in Table I.

TABLE I. Range dimensions (inches, minimum)

	Width	Depth	Height
Range	36	36 1/	36 2/
Oven interior	22	26-1/2	12

1/ Includes front overhang.
2/ To cooking surface.

2.5 Legs. The range shall be equipped with adjustable legs to allow an adjustment of ± 1 inch to the 36 inch height specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

2.6 Finish. The grade A range front, sides, and back shall be stainless steel. The grade B range front shall be stainless steel; the remaining sides and back shall be carbon steel.

2.7 Electrical characteristics. The range shall be wired for 208V, 60 Hz, 3 Ph unless otherwise specified (see 5.2).

2.8 Standard compliance. The ranges shall comply with UL Standard No. 197 and NSF International Standard No. 4.

2.9 Data nameplate ("Government unique" requirement). The ranges shall be furnished with a data nameplate in accordance with the applicable requirements of MIL-STD-130 except the requirements for: (a) Methods of applying, (b) Identification tags, (c) Information not required, and (d) Optional marking information shall not apply. The data nameplate shall be made of minimum 20 gauge corrosion-resisting metal and attached to the range by rivets, screws, or welding in such a manner as to meet the applicable NSF International sanitary requirements for this equipment. The plate shall contain the following information which shall be stamped, engraved, or applied by photosensitive means:

Contract Number
National Stock Number
Procurement Instrument Identification Number
CID Based Part Identification Number (PIN)
Manufacturer's Name, Address, and Telephone Number
Supplier's Name, Address, and Telephone Number (List Only if Different from Manufacturer)
Manufacturer's Model and Serial Number
Government Approved Manual Number

Each plate shall be placed so that it is readily visible to the operator during normal operating use and so as to not adversely affect the life and utility of the ranges.

2.10 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this commercial item description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

2.11 Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description unless otherwise specified.

2.12 Workmanship. The finished ranges shall be complete, clean, and free of fabrication marks, scratches, dents, sharp edges, sharp corners, burrs, slivers, or visible evidence of rust. Rivets, when used, shall be tight and the rivet heads and peened ends shall be round and concentric and in full contact with the joined metal surfaces. There shall be no empty rivet holes. Welds shall be clean, continuous, sound, and free of flux, pits, buildups, undercuts, and shall be ground so as to blend with the adjacent surfaces. Spot welds shall be free from pits, burn throughs, and flashes.

3. QUALITY ASSURANCE

3.1 Contractor certification. The contractor shall certify that the product offered meets the salient characteristics and requirements of this commercial item description and except for those Government unique requirements specified, conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace or that had successfully been delivered to the Government on a previous contract or purchase order. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

3.2 Compliance. Prior to approval of the first shipment, the contractor shall submit satisfactory evidence to the contracting officer or his authorized representative that the range conforms to the requirements of UL Standard No. 197 and NSF International Standard No. 4, as applicable.

3.2.1 Underwriters Laboratories, Inc. (UL). Acceptable evidence of meeting the requirements of UL Standard No. 197 shall be the UL listing mark, or a certified test report from a recognized independent laboratory acceptable to the Government indicating compliance with the applicable requirements of UL Standard No. 197.

3.2.2 NSF International. Acceptable evidence of meeting the requirements of NSF International Standard No. 4 shall be a listing in the current edition of the NSF International "Listing of Food Service Equipment" and display of the NSF International mark on the finished product, or a certified test report from a recognized independent laboratory acceptable to the Government indicating compliance with the applicable NSF International requirement(s).

Source: https://assist.dla.mil -- Downloaded: 2026Ø-26T08:38Z
Check the source to verify that this is the current version before use.

4. PACKAGING

4.1 Commercial packaging. Each range shall be cleaned, preserved and packaged in accordance with ASTM D 3951.

4.2 Commercial packing. The range shall be packed in accordance with ASTM D 3951.

4.3 Export packaging. Each electric range shall be disassembled to the extent determined by the contractor to protect parts susceptible to damage during shipment and storage and for reduction of cubage. Parts removed shall be identified. Nuts, bolts, and screws removed during disassembly shall be reinserted and secured in their respective locations or placed in a cloth drawstring bag. The range and parts shall be cleaned, preserved, and cushioned to afford protection against corrosion, deterioration, and physical damage during shipment and storage. Disassembled parts may be packaged in a class weather-resistant fiberboard box conforming to PPP-B-636 or placed within the range or directly into the shipping container with the range. The owner's manual shall be placed in a plastic bag and then securely attached to the unit. The range door shall be secured in a closed position with strapping or filament reinforced pressure-sensitive tape. Cushioning or other appropriate material shall be placed between the range surfaces and securement to protect the finish.

4.4 Export packing. Each electric range shall be packed in a snug-fitting wood-cleated, plywood box conforming to domestic type, style A or J, grade B, type 2 load of PPP-B-601 or nailed wood box conforming to class 1, style 2 or 4, grade B, type 2 load of PPP-B-621. The contents of each box shall be cushioned, blocked, and braced to prevent movement while the box is in transit. Each shipping container shall be closed and strapped in accordance with the appendix of PPP-B-601 and PPP-B-621, as applicable.

4.5 Marking of interior boxes and shipping containers (commercial and export). Commercial marking for interior boxes and shipping containers is acceptable provided the following information is included:

National Stock Number	Date of Packaging (Month/Year)
Item Description	Contract Number
Quantity, Unit of Issue	Name, Address, and Zip Code of Contractor 1/

1/ Interior boxes do not require this information.

5. NOTES

5.1 Intended use. The electric ranges covered by this commercial item description are intended for use in dining halls for oven roasting and top surface cooking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

5.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this commercial item description.
b. PIN designating type and grade required (see 1.1, 1.2, and 5.4).
c. Government approved manual number to be included on data nameplate (see 2.9).
d. Selection of applicable packaging and packing required (see 4.1).
e. Electrical characteristics required (see 2.7).

5.3 Sources for documents.

5.3.1 Sources for non-Government association documents.

ASTM D 3951 - Standard Practice for Commercial Packaging

ASTM documents are available from:

American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

NSF International Standard No. 4 - Commercial Cooking and Hot Food Storage Equipment

NSF International documents are available from:

NSF International
3475 Plymouth Road
P.O. Box 130140
Ann Arbor, MI 48113-0140

UL Standard No. 197 - Commercial Electric Cooking Appliances

UL Standards are available from:


Underwriters Laboratories, Inc. (UL)
333 Pfingsten Road
Northbrook, IL 60062

5.3.2 Source for Government documents. Copies of military and federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

5.4 Part identification number (PIN). The PIN's to be used for items required by this CID are created as follows:

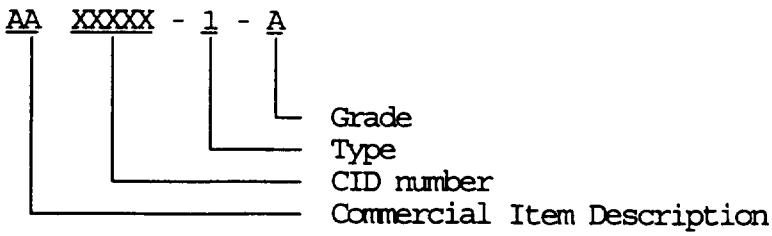

5.5 "Government unique" requirements. Whenever a "Government unique" requirement is included in the title of a paragraph under "Salient Characteristics", it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

MILITARY INTERESTS:

Custodians

Army - GL
Navy - SA
Air Force - 99

Review Activities

Army - MD, QM
Navy - CG, MC
Air Force - 50, 84
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project 7310-0822

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.