MIL-C-43724C
2 March 1983
SUPERSEDING
MIL-C-43724B
28 February 1979

MILITARY SPECIFICATION

CAP, HOT WEATHER, OLIVE GREEN 507

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers a hot weather cap made from polyester/cotton durable press material.

1.2 Classification. The cap shall be one type in the following sizes (see 6.2).

Schedule of sizes

6-3/8	7-1/4
6-1/2	7-3/8
6-5/8	7-1/2
6-3/4	7-5/8
6-7/8	7-3/4
7	7-7/8
7-1/8	

2. APPLICABLE DOCUMENTS

2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Laboratories, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:09Z
Check the source to verify that this is the currentversion before use.

SPECIFICATIONS

FEDERAL

V-T-276	-	Thread, Cotton
V-T-285	-	Thread, Polyester
UU-P-268	-	Paper, Kraft, Wrapping
DDD-L-20	-	Label: For Clothing, Equipage and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

MILITARY

MIL-C-508	-	Cloth, Oxford, Nylon, 3 Ounce
MIL-R-3065	-	Rubber, Fabricated Products
MIL-C-41831	-	Cloth, Knitted, Nylon, Raschel
MIL-T-43548	-	Thread, Polyester, Cotton-Covered and Rayon-Covered
MIL-C-43791	-	Cloth, Twill, Polyester/Cotton (Durable Press)
MIL-C-43836	-	Cloth, Interlining, Non-Woven
MIL-S-43993	-	Sweatband, Headwear: Artificial Leather

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-901	-	Provisions for Evaluating Quality of Caps, Garrison, Men's
MIL-STD-1188	-	Commercial Packaging of Supplies and Equipment

(Copies of documents required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:09Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D-2000 - Elastomeric Materials for Automotive Applications

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

TEXTILE COLOR CARD ASSOCIATION

Standard Color Card of America

(Application for copies should be addressed to the Textile Color Card Association of the United States, Inc., 24 East 38th Street, New York, NY 10016.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

3.1 Guide sample. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this document may appear in the sample, in which case this document shall govern.

3.2 Material (see 6.4).

* 3.2.1 Basic material. The basic material shall be polyester/cotton twill cloth, dyed Olive Green 507, conforming to type II, class 3 of MIL-C-43791.

3.2.2 Stiffener. The material for the crown stiffener shall be raschel knitted nylon cloth conforming to MIL-C-41831.

3.2.3 Visor interlining. The material for visor interlining shall be sheet rubber, 0.085 + 0.010 inch thick, conforming to type, class, grade and suffix letter RS810A$_1$ of ASTM D-2000.

3.2.4 Sweatband. The artificial leather for the sweatband shall be 1-1/8 + 1/16 inches wide, length shall be as specified in operation 5.a. of table II, Brown Shade No. 424 conforming to MIL-S-43993.

3.2.5 Sizing strip. The material for the sizing strip shall conform to type I, class 2 of MIL-C-43836.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:09Z
Check the source to verify that this is the current version before use.

3.2.6 Tape. The tape for crown seams, binding and strip for bottom of stiffener shall be made from nylon oxford cloth, dyed Olive Green 106, conforming to type I, class 2 of MIL-C-508, except that colorfastness to wet-drycleaning shall not apply.

3.2.7 Thread. The thread for seaming and stitching shall be polyester thread, conforming to type I or II, class 1, sizes A and B of V-T-285. Cotton-covered polyester thread conforming to MIL-T-43548 may be substituted for the polyester thread using 70, 2 ply for the size A, and 50, 2 ply for the size B. The thread for eyelets shall be cotton, type IC2, ticket No. A and B, 3 ply conforming to V-T-276; polyester, type I or II, class 1, sizes A and B, conforming to V-T-285; or cotton-covered polyester, sizes 70, 2 ply, and 50, 2 ply conforming to MIL-T-43548. The thread shall be dyed Olive Drab, S-1, C.A. 66022.

3.2.7.1 Colorfastness. The dyed thread shall show fastness to light, laundering and perspiration equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to light, laundering and perspiration.

3.2.8 Labels. Each cap shall have a combination identification-size label and an instruction label conforming to DDD-L-20. The length of the labels shall be not more than 1-1/8 $\pm$ 1/16 inches to match the width of the finished sweatband stripping and the width shall be governed by the contents. The fastness to laundering requirements of DDD-L-20 shall apply.

3.2.8.1 Instruction label. The instruction label shall conform to type VI, class 3 and shall contain the following information:

LAUNDERING INSTRUCTIONS

Wash with lukewarm water, using soap or mild
detergent and air dry. DO NOT WRING OR TWIST.
DO NOT STARCH OR USE BLEACH.

* 3.2.8.2 Combination label. The combination identification-size label shall conform to type VI, class 4.

3.3 Design. The cap is a close fitting style having a six-piece unlined crown, with sewn eyelets centered on each crown piece, except the two front pieces; a mesh stiffener at front; a rubber interlined visor; and a synthetic leather sweatband (see figure 1).

* 3.4 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government. The working patterns shall be identical to the standard patterns which shall not be altered in any way. The patterns provide a 3/8 inch seam allowance for bottom crown edge and for the inside covered edge of visor, and 1/8 to 3/16 inch for seaming top and under visor outer curved edge, and 1/4 inch for all other seams.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:09Z
Check the source to verify that this is the current version before use.

3.4.1 Pattern parts. The components of the cap shall be cut from the materials as specified below, in accordance with the pattern parts indicated.

TABLE I. List of pattern parts

Material	Pattern nomenclature	Cut parts
Polyester/cotton twill	Front crown (right and left)	2
	Side crown (right and left)	2
	Back crown (right and left)	2
	Top visor	1
	Under visor	1
Nylon, raschel cloth	Stiffener	1
Rubber, sheet stock	Visor interlining	1

NOTE: Patterns are not furnished for bias stripping for seam tapes, binding and bottom of stiffener, sweatband, and sizing strip. See table II, operation 1 for their requirements.

3.5 Construction. The construction shall conform in all respects to the requirements specified in table II and herein. Figures 1 and 2 are furnished solely for guidance and information. Should variation from the document appear in figure 1 or 2, the document shall govern.

3.5.1 Stitches, seams and stitching. All stitches, seams and stitching shall conform to FED-STD-751. The type of seam, stitching and stitches per inch shall be as specified in table II. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, pleats, puckers or open seams occur. When two or more methods of seams or stitches are given for the same operation, any one may be used. Where stitch type 401 is used, the chain or underside of the stitch shall be on the inside of the cap.

3.5.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched not less than 1/4 inch except where ends are turned under or caught in other seams or stitching. Ends of a continuous line of stitching shall overlap not less than 1/2 inch. Thread tensions shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be imbedded in the materials sewn.

3.5.1.1.1 Repairs of type 301 stitching.

a. When thread breaks, skipped stitches, run-offs, or bobbin runouts occur during sewing, except prestitching, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch in back of the end of the stitching. 1/

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:09Z
Check the source to verify that this is the current version before use.

b. Except for prestitching, thread breaks, or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by over-stitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area, and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.5.1.2 Type 101, 401, 502, 503, 504 and 505 stitching. Thread tension shall be maintained so that there will be no loose or excessively tight stitching. All repairs shall be in accordance with 3.5.1.1.1a and b. Repairs to stitch type 401 may be accomplished by use of stitch type 301.

3.5.2 Repairs. Repairs such as mends, darns, patches or splices are not permitted on the cap.

3.5.3 Automatic stitching. Automatic machines may be used to perform any of the stitch patterns provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met; and at least three tying, overlapping or backstitches are used to secure the ends of the stitching.

3.5.4 Sewn eyelets. Eyelets shall be clean cut and shall be sewn on the twill side of the fabric. The bight of stitching around the eyelet shall be not less than 1/16 inch and the inside diameter of the finished eyelet shall be 1/8 to 3/16 inch. The eyelets shall have the stitches overlapping not less than 1/16 inch. The stitches per eyelet shall be determined by counting the number of needle penetrations in the outside row of eyelet stitching. The overlapping stitches at the end of the stitching shall be included. When 401 stitch type is used, the purling shall be on the inside of the cap. When type 502 and 503 stitch type is used, the outside purling shall be at the point of needle penetration and the inside purling shall not be pulled to the outside. The thread ends shall be on the inside of the cap.

3.6 Manufacturing operations requirements. The cap shall be manufactured in accordance with operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching to facilitate manufacture is permissible, provided the thread is removed or does not show on the finished cap.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:09Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut cap in strict accordance with patterns furnished which show size, directional lines (warp) and notches for proper assembly of parts. The face of the fabric (2 up and 1 down left hand twill) shall finish on the outside of the caps. b. Cut all parts from the same piece of material except the under visor which may be cut from ends. Parts cut from ends shall approximate the shade of the basic material. c. Cut stripping from seam tapes (see operation 6) and bottom of the stiffener (see operation 7) on the bias, 1-1/16 to 1-3/16 inches wide. The stripping for the bottom of stiffener may be cut on the straight. d. Cut binding for top and sides of stiffener on the straight or bias and of sufficient width to comply with operation 7. e. Cut raschel stiffener in strict accordance with patterns furnished which show size, with the heavy filling lines across the width of the stiffener. f. Cut the sheet rubber visor interlining in strict accordance with patterns furnished which show the size.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:09Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd) g. Cut sizing strip 3/8 ± 1/16 inch wide and of sufficient length to comply with operation 10.b and to meet the applicable finished cap measurements specified in table III. It has been established that the sizing strip should be cut slightly longer than the head size (plus overlap if applicable) in order to meet the finished head measurements.						
*2.	Replacement of damaged parts. Care shall be exercised during the spreading, cutting and manufacturing operations to assure that material defects and damages, as specified in MIL-STD-901, are excluded and replaced with non-defective and properly matched material.						
*3.	Component marking. Mark, ticket or bundle all parts, to insure a uniform shade, size and proper assembly throughout the cap. Any method of marking may be used except: a. Corrosive metal fastening devices. b. Sew-on tickets. c. Adhesive tickets which leave an impression or traces of paper or adhesive on the material after removal of the ticket.						
*4.	Make visor. Finished appearance. The visor shall be smooth and free of wrinkles and puckers. The hinge construction shall be evenly formed. The quilting of the visor shall be evenly formed.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:09Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN LOOPER	COVER
4.	Make visor. (cont'd)						
	a. With face sides together, notches matched, and the fullness of top visor evenly distributed, stitch the top visor and under visor together along outer arc with 1/8 to 3/16 inch seam.	301 or 504 or 505	LSq-2(a) LSq-2(a) LSq-2(a)	8-14 8-14 8-14	B B B	B B B	
	b. Turn visor finished position and raise stitch visor seam, 1/16 to 3/32 inch from joining seam, with the seam turned toward the bottom of visor.	301	LSq-2(b)	10-14	B	B	
	c. Insert visor interlining, and with the joining-seam even with the bottom edge of the interlining, stitch visor cover together along inner arc. The stitching shall be not more than 1/32 inch from edge of interlining. Slash or trim seam allowance to facilitate setting (see operation 10.c).	101 or 301 or 401	SSa-1 SSa-1 SSa-1	8-14 8-14 8-14	B B B	 B A	
	d. Top stitch through all plies with four rows of stitching 1/4 to 5/16 inch apart with the outer row 5/8 to 3/4 inch from the outer edge of visor.	301	SSv-4	10-14	B	B	
5.	Make sweatband and attach labels.						
	a. Cut sweatband of sufficient length to meet the applicable finished measurement specified in table III. The sweatband shall not be spliced. NOTE: It has been established that the sweatband should be cut slightly longer in order to meet the finished measurement.						
	b. Abut ends of sweatband and zig-zag stitch together. The ends of the stitching shall be tacked by increasing the stitches for a distance of 1/8 inch.	304	FSa-1	16-20	A	A	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:09Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Make sweatband and attach labels. (cont'd)						
	c. Center the combination label over the joining-seam with the bottom of the label aligned with the bottom edge of sweatband and stitch on all four sides. A 1/4 inch off-center tolerance is permtted. The label may be stitched along bottom and sides only and the top of label caught in sweatband-to-cap joining seam. The top and bottom of the label shall not extend beyond the width of the sweatband.	301 or 401	LSbj-1 LSbj-1	8-10 8-10	B B	B A	
	d. Position the instruction label on sweatband not more than 1/2 inch from either side of combination label with the bottom of label aligned with the bottom edge of sweatband and stitch on all four sides. The label may be stitched along the bottom and sides only and the top of the label caught in sweatband-to-cap joining seam. The top and bottom of the label shall not extend beyond the width of the sweatband.	301 or 401	SSa-1 SSa-1	8-10 8-10	A B	A A	
6.	Make seam tape stripping.						
	Turn in both raw edges of seam-tape stripping and precrease or turn in both raw edges and stitch not more than 1/8 inch from each folded edge. The tape shall finish 5/8 ± 1/16 inch wide.	301 or 401 or 101	EFa-1 (each side) EFa-1 (each side) EFa-1 (each side)	8-14 8-14 8-14	A B A	A A	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T22:09Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Make stiffener.						
	a. Turn under raw edge of one side of stripping; overlap it 3/8 ± 1/16 inch on bottom edge of stiffener and stitch with two rows of stitching. Both rows of stitching shall be through the stiffener. The stripping shall extend 1/2 inch beyond bottom of stiffener.	301 or 401	LSb-2 LSb-2	8-14 8-14	B B	B A	
	b. Bind top and sides of stiffener with the raw edges of binding turned in and the stitching 1/16 to 1/8 inch from the turned-in edge. The binding shall finish 1/4 ± 1/16 inch wide.	301 or 401	BSc-1 BSc-1	10-14 10-14	B B	B A	
8.	Make crown.						
	Finished appearance. The outer shell shall be evenly joined without fullness, pleats, or puckers.						
	a. Stitch eyelet on side and back crown pieces as indicated by pattern (see 3.5.4 and figure 2).	401 or 502 or 503		19-24 per eyelet 26-32 per eyelet 26-32 per eyelet	B or 50-2 A or 70-2 A or 70-2	A or 70-2 A or 70-2 A or 70-2	
	b. Stitch side sections together (three right and three left).	301	SSa-1	10-14	B	B	
	c. Heat press seams open.						
	d. Join the two sections together.	301	SSa-1	10-14	B	B	
	e. Heat press seam open.						

NATICK Form 903
1 Dec 76

EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T22:09Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Attach stiffener and tape crown seams.						
	a. Center stiffener on inside of crown and stitch extension strip to bottom edge of crown 1/4 to 5/16 inch from edge.	301 or 401	SSa-1 SSa-1	8-14 8-14	B B	B A	
	b. Tape center seam from front to back catching the center of the crown stiffener in the stitching.	301		10-14	B	B	
	c. With the stiffener drawn sufficiently taut so that there is no excess material on the front panels and no buckling of the stiffener which results in distortion of the front panels, stitch the sides of the stiffener to the seam allowance of each side panel. This operation may be omitted providing the finished appearance conforms to the requirements of this operation.	301 301	SSa-1 or SSbd-1	8-14 8-14	B B	B B	
	d. Tape the other seams overlapping the sides of the stiffener with the seam tapes.	301		10-14	B	B	
	NOTE: On the outside of the cap the stitching shall be 1/8 to 3/16 inch from the crown joining-seams. The seam tapes shall be continuous from one end of crown to the other.						
10.	Attach sizing strip and visor.						
	a. Overedge bottom edge of cap. This operation may be omitted.	502 or 503	EFd-1 EFd-1	6-8 6-8	A A	A A	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T22:09Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN / LOOPER	COVER
10.	Attach sizing strip and visor. (cont'd)						
	b. With the bottom edge of cap and edge of sizing strip even, stitch sizing strip to inside of cap, 1/16 to 3/16 inch from edge. The ends of sizing strip may abut or overlap.	101 or 301 or 401		6-8 6-8 6-8	A or B B B	B B A	
	c. Position visor on outside of crown, match visor notch with front center seam of crown and stitch visor to crown, with the stitching superimposing the stitching on the inner edge of visor cover (see operation 4.c). The distance from center front of crown to ends of visor shall be equal (1/8 inch tolerance). Neither the stiffener nor the visor interlining shall be caught in the stitching.	301	SSa-1	10-14	B	B	
11.	Attach sweatband.						
	a. Position top edge of sweatband on crown 1/4 to 3/8 inch and 1/16 to 1/8 inch from edge of visor interlining, and stitch to crown 1/16 to 1/8 inch from top edge of sweatband. The sweatband joining-seam shall be in line with center back crown seam. The sweatband shall be fitted to the cap without stretching or twisting. Turn sweatband to inside of cap with bottom edge of sweatband not more than 1/8 inch above bottom folded edge of cap.	301	LSa-1	8-10	B	B	
12.	Clean and block caps.						
	a. Trim thread ends to 1/4 inch maximum length except from eyelets and remove loose threads. Thread ends on eyelets shall be not less than 1/8 inch nor more than 1/2 inch long.						

NATICK Form 903
1 Dec 76

EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T22:09Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Clean and block caps. (cont'd) b. Remove all loose threads, spots, stains, shade and size tickets. c. Steam block and dry cap on the appropriate size block, shaping cap. This operation may be omitted.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:09Z
Check the source to verify that this is the current version before use.

* 3.7 Finished measurements. The finished caps shall conform to measurements for each respective size, as shown in table III. All measurements and all tolerances are expressed in inches.

TABLE III. Sizes and finished measurements

Cap size	Inside cap circumference 1/	Visor width 2/
6-3/8	20-3/8	6
6-1/2	20-3/4	6
6-5/8	21-1/8	6
6-3/4	21-1/2	6
6-7/8	21-7/8	6
7	22-1/4	6-1/2
7-1/8	22-5/8	6-1/2
7-1/4	23	6-1/2
7-3/8	23-3/8	6-1/2
7-1/2	23-3/4	7
7-5/8	24-1/8	7
7-3/4	24-1/2	7
7-7/8	24-7/8	7
Tolerance	± 1/8	± 1/8

1/ With the cap laid on table, head opening up, measure inside cap circumference around bottom edge of sweatband on the finished cap.

2/ With the cap laid on table, head opening down, measure across visor on the finished cap as indicated by "A" in figure 1.

3.8 Workmanship. The finished cap shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items and determine the validity of the certification.

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:09Z
Check the source to verify that this is the currentversion before use.

* 4.2 Quality conformance inspection. Unless otherwise specified, inspection shall be in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be tested in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.2.2 End item vidual examination. The end item shall be examined for the defects listed below. The lot size shall be expressed in units of caps. The sample unit shall be one cap. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 4.0 for major defects, 10.0 for major and minor A combined defects, and 15.0 for total (major, minor A and minor B combined) defects.

Defects	Classification Major	Minor A	Minor B
Material defects and damages			
a. Hole, cut, tear, needle chew, or burn.	X		
b. Drill hole on outside of cap.			X
c. Visible mend.	X		
d. Weakening defects:			
1. Smash.	X		
2. Multiple float or loose slub:			
-on outside	X		
-on inside.		X	
e. Permanent crease in cloth (when caught in stitching).	X		
f. Unsightly slub or shade bar:			
-on outside	X		
-on inside.			X
Shaded parts			
Shade varying within a part of between two or more parts on outside.		X	
Cleanness			
a. Spot or stain, clearly noticeable:			
-on outside		X	
-on inside.			X
b. One or more marking tickets not removed.			X
c. Any marking visible on outside.	X		
d. Thread ends (except eyelets) not trimmed, or loose threads not removed.			X

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:09Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
Cutting			
a. Any component part not cut in accordance with specified pattern, directional lines on patterns, or not cut in accordance with document requirements.	X		
b. Twill line of any outside part not running in specified direction.	X		
Component and assembly			
a. Any component part or required operation omitted (unless otherwise classified herein).	X		
b. Any operation not performed as specified (unless otherwise classified herein).		X	
Seams and stitching			
a. Accuracy of seaming:			
1. Seams or component part twisted, puckered, or pleated (unless otherwise classified herein).		X	
2. Part of material caught in unrelated operation or stitching.	X		
3. Stitching overlapping end(s) of thread break less than 1/2 inch.			X
4. Ends of stitching not secured as specified.			X
b. Gage of stitching and seam allowances:			
1. Irregular, i.e., unevenly gaged or various stitchings not uniform (to be scored only when condition exists on major portin of seam).	X		
2. Beyond range of width specified or varies more than 1/16 inch when no range is specified.		X	
c. Stitches broken or missing (including overedging and excepting eyelets):			
-up to and including 1/4 inch			X
-more than 1/4 inch but not more than 1/2 inch		X	
-more than 1/2 inch.	X		

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:09Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)			
d. Skipped stitches or runoff stitches:			
-1/4 inch up to and including 1/2 inch long			X
-more than 1/2 inch long.		X	
e. Raw edge:			
-more than 1/4 inch long.			X
f. Seam and stitch type:			
-seam type or stitch type not as specified.			X
g. Stitches per inch (except eyelets) (to be scored only when condition exists on major portion of seam).			
- less than minimum or more than maximum specified.			X
h. Stitch tension (except eyelets):			
1. Loose tension resulting in a loose seam.	X		
2. Loose tension (exposed loops of top or bottom threads:			
-up to 1/4 inch in length		X	
-over 1/4 inch in length.	X		
3. Tight tension (stitches break when strain is applied in the direction of the seam or stitching).		X	
Eyelets			
a. One or more omitted or added.	X		
b. Stitches not securely caught in fabric (stitches pull away from fabric).	X		
c. One or more broken or more than two continuous skipped stitches in one or more eyelets.		X	
d. Loose stitch tension.			X
e. Purling of 401 stitch type on outside of cap.			X
f. Purling of 502 or 503 stitch type not at needle penetration or inside purling pulled to outside.			X
g. Thread ends less than 1/8 inch long.		X	
h. Thread ends more than 1/2 inch long.			X
i. Number of stitches per eyelet not as specified.			X
j. Inside diameter of eyelet less than 1/8 inch or more than 3/16 inch.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:09Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
Eyelets (cont'd)			
k. Cloth cut-out in center of eyelet not removed.			X
l. Misplaced eyelet.		X	
Labels			
a. Combination label (identificaion and size) omitted, incorrect or illegible.	X		
b. Instruction label omitted, incorrect or illegible.			X
c. Combination label not stitched on all four sides.			X
d. Instruction label not stitched on all four sides.			X
e. Combination label position off center by more than 1/4 inch.			X
f. Either label extending beyond the width of the sweatband.			X
Crown			
a. Crown puckered or pleated at joining to sweatband.		X	
b. Any seam tape less than 9/16 inch or more than 11/16 inch wide.			X
c. Distorted, pleated, or fullness on one or more panels.	X		
Sweatband			
a. Twisted, pleated, puckered, stretched or tight.	X		
b. Sweatband exposed 1/8 inch below cap.			
-up to 3 inches inclusive			X
-more than 3 inches.		X	
c. Bottom edge of sweatband more than 1/8 inch from bottom folded edge of cap.			X
d. Width less than 1-1/16 inches or more than 1-3/16 inches.		X	
e. Joining seam of sweatband more than 1/4 inch from center back crown seam.			X
f. Sweatband spliced.			X
g. Ends of sweatbands not abutted or ends at top or lower edge not even by 1/16 inch or more.		X	

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:09Z
Check the source to verify that this is the currentversion before use.

Defects	Classification Major	Minor A	Minor B
Visor and stiffener			
a. Upper or lower plies of visor wrinkled or excessively full.		X	
b. Center of visor off center from front crown seam: -more than 1/8 inch and up to 1/4 inch inclusive			X
-over 1/4 inch.	X		
c. More than or less than four rows of stitching.		X	
d. Edge of visor poorly shaped.		X	
e. Seam joining top and bottom of visor pieces raised toward top of visor.	X		
f. Edge of visor interlining not worked out to outer edge of cover causing fullness on top or underside of visor between edge and first row of quilting stitching.		X	
g. Visor wavy or buckled.	X		
h. Stiffener caught in stitching attaching visor to crown or sweatband to crown.		X	
i. Sides of stiffener not overlapped by seam tapes.		X	
j. Binding on stiffener twisted.		X	
k. Binding on stiffener less than 3/16 inch or more than 5/16 inch wide.			X
l. Seam joining outer edge of visor not even with the bottom edge of visor interlining.			X

4.2.3 End item dimensional examination. The end item shall be examined for conformance to the dimensions specified in table III. Any dimension deviating from the specified requirements shall be classified as a defect. The lot size shall be expressed in units of caps. The sample unit shall be one cap. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.2.4 Packaging inspection. An examination shall be made to determine that the preservation, packing, and marking comply with section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged with the exception that it need not be closed. Examination of closure defects listed below shall be made on shipping containers fully packaged. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:09Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components such as: incomplete closure of container flap, loose strapping, improper taping, or inadequate stapling. Bulged or distorted container.
Content	Number of intermediate packs per shipping container is more or less than required. Number of caps per intermediate pack is more or less than required. 1/ Size shown on one or more caps not as specified on interior or outer container. 1/

1/ For this defect, one intermediate pack from each container in the sample shall be examined.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each cap shall have the back half of the crown folded in against the front half with the fold running from side to side. Twenty caps of one size only shall be nested and placed with the visor flat in an intermediate fiberboard box conforming to style RSC, type CF, variety SW, class domestic, grade 175 of PPP-B-636. Inside dimensions of each box shall be 14-3/4 inches in length, 7-1/2 inches in width and 6 inches in depth. The nested caps shall be protected in the box with crumpled tissue paper placed in the voids above the visor on one end and behind the folded crown at the opposite end. Box closure shall be secured with minimum 2-inch width gummed paper tape conforming to type III, grade B of PPP-T-45.

5.1.2 Commercial. The caps shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2).

5.2.1 Level A packing. Sixty caps of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A intermediate packs shall be packed flat, three in length within the shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15-1/2 inches in width, and 6-3/4 inches in depth. Approximate dimensions are furnished as a guide only. In addition, each container shall have the contents completely covered on the top and

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:09Z
Check the source to verify that this is the currentversion before use.

bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.4. Toward the end of the contract or purchase order, or when there are less than the required amount per container of the same size, mixed sizes of caps may be packed in the same container.

5.2.2 Level B packing. Sixty caps of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A intermediate packs shall be packed flat, three in length within the shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15-1/2 inches in width, and 6-3/4 inches in depth. Approximate dimensions are furnished as a guide only. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.4. Toward the end of the contract or purchase order, or when there are less than the required amount per container of the same size, mixed sizes of caps may be packed in the same container.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the box specification, except that the inspection shall be in accordance with 4.2.4.

5.2.3 Commercial packing. Caps, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

5.3 Marking. In addition to any special marking required by the contract or purchase order, intermediate packs and shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188, as applicable.

5.3.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED NSNs" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and NSNs contained therein.

6. NOTES

6.1 Intended use. The caps are intended for wear by male and female Military personnel of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:09Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Acquisition documents should specify the following:

(a) Title, number, and date of this document.
(b) Size required (see 1.2).
(c) Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Sample and shade samples. For access to sample of the end item and shade samples, address the contracting office issuing the invitation for bids.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the document.

6.5 Changes from previous issue. The margins of this document are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians.

Army - GL
Air Force - 99

Review activities:

Army - MD
DLA - CT
Air Force - 82

User activity:

Air Force - 45

Preparing activity:

Army - GL

Project No. 8415-0310

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:09Z
Check the source to verify that this is the currentversion before use.


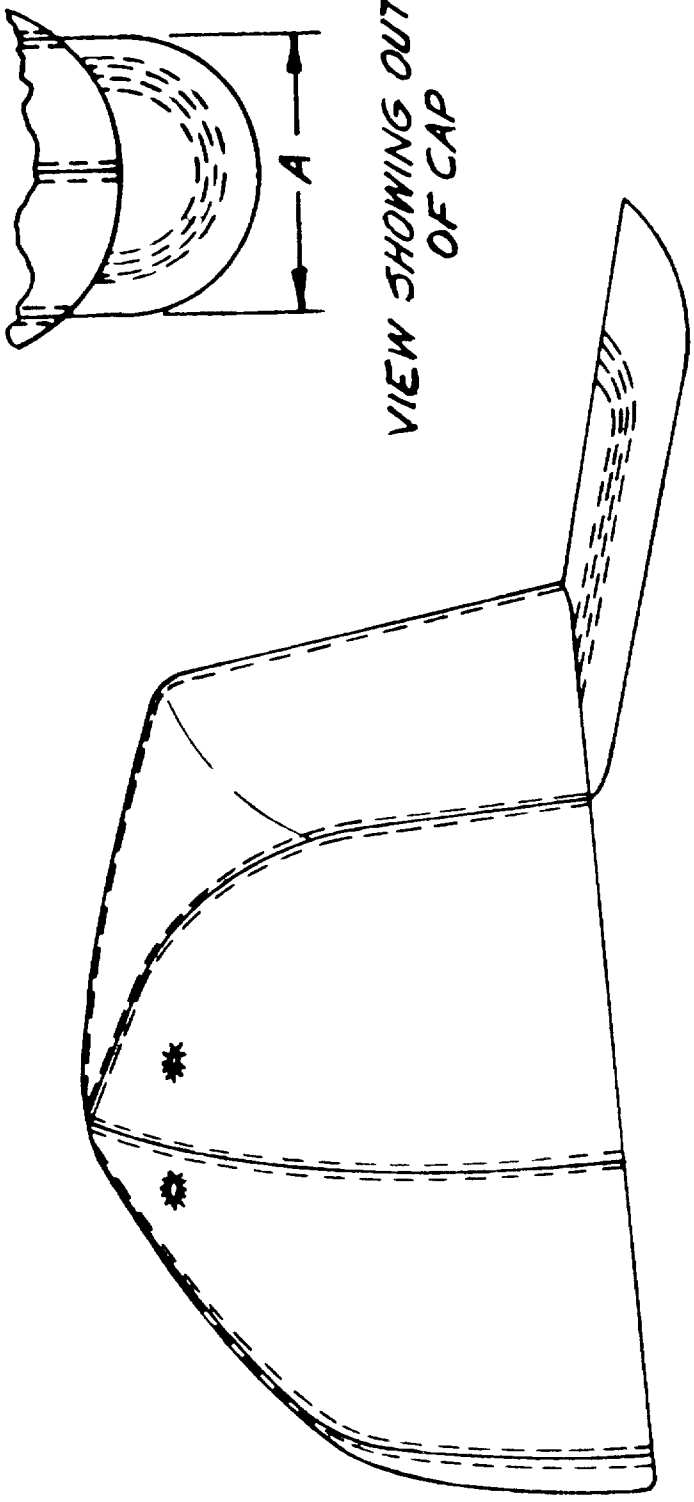


FIG. 1 CAP, HOT WEATHER, OLIVE GREEN 507

2-1-1489

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:09Z
Check the source to verify that this is the current version before use.

EYELET STITCH TYPE 401

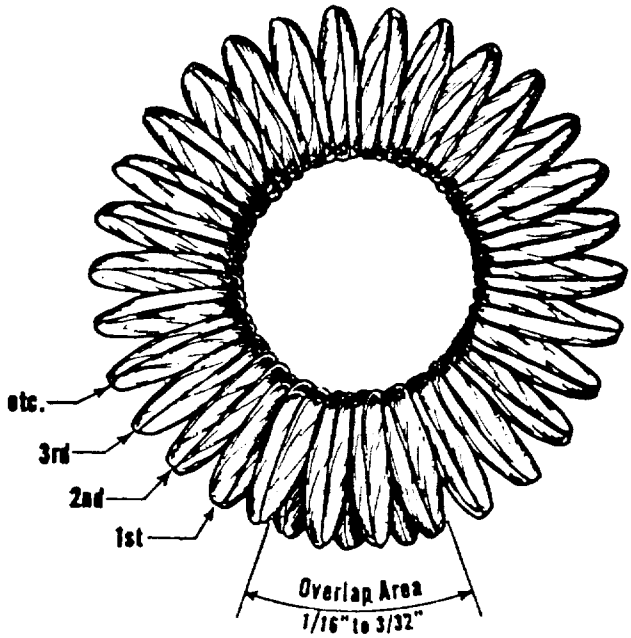

EYELET STITCH TYPE 502 OR 503

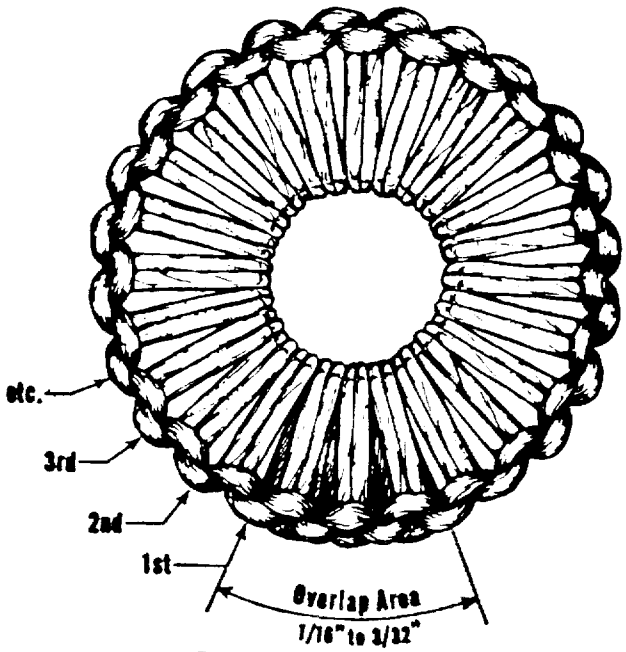


FIGURE 2. *Stitched eyelets.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:09Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Laboratories
ATTN: DRDNA-ES
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:09Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-43724C Cap, Hot Weather, Olive Green 507

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:09Z
Check the source to verify that this is the current version before use.