INCH-POUND

MIL-DTL-43719/1B
6 APRIL 2009
SUPERSEDING
MIL-M-43719/1A
13 July 1972

DETAIL SPECIFICATION SHEET

MARKING MATERIALS AND MARKERS, ADHESIVE, ELASTOMERIC, PIGMENTED: LETTERS AND NUMERALS

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-43719.

REQUIREMENTS:

Materials. Letters and numerals shall be made from marking material, liner, and when specified in the contract or order (see 6.2 of the general specification), translucent transfer sheet, all conforming to requirements specified in MIL-DTL-43719.

Construction. Letters and numerals shall be unmounted or mounted, as specified in the contract or order. (Note: In the trade, “unmounted” is also known as “cutout”, and “mounted” as “pre-spaced” and “individually pre-spaced”.)

Unmounted. Unmounted letters and numerals shall be cut to shape and shall be made from a layer of elastomeric marking material with a protecting liner on the adhesive side. All edges shall be cut smooth. Unless otherwise specified in the contract or order, the letters and numerals shall be in heights, dimensions, and configurations of Series C Alphabet per Standard Highway Signs (SHS) 2004 Edition. Letters and numerals in other heights shall be identical to Alphabet C in configuration, and the dimensions shall be scaled in direct proportion. When specified in the contract or order, letters and numerals shall be covered on their face side with translucent transfer sheet, die-cut flush with the edges of the letters and numerals.

Mounted. Unless otherwise specified in the contract or order (see ordering data), mounted letters and numerals shall consist of letters and numerals cut from elastomeric marking material in the heights, dimensions and configuration C Standard Alphabet, with each letter mounted on a rectangular liner and covered on its face side with a matching rectangular, translucent transfer sheet. All edges shall be cut smooth. The liner shall not be cut completely through at the outline of letters and numerals, nor shall it be cut so deep as to interfere with it ready removal from the marker or to result in distortion of the marker when removal is attempted. Notches, punch holes, slits, or other cuts in the rectangles will be permissible, provided the quantity and type are limited so that the resulting mounts are compatible in use with solid rectangular mounts. This allows no protuberances beyond the specified rectangular dimensions. For Series C standard Alphabet, the rectangles shall be in the size shown in table I. The letter and number characters shall be centrally located in the rectangles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:07Z
Check the source to verify that this is the current version before use.

Table I. Dimensions of rectangular liners and transfer sheets for letters and numerals

Height (in.) of letter or numeral	1	1-1/2	2	3	4
Height (in.) of liner and transfer sheet	1-1/4	1-3/4	2-1/4	3-1/2	4-1/2
Width (in.) of liner and transfer sheet					
a. Letters J, L, and T	5/8	15/16	1-1/4	1-7/8	2-1/2
b. Letters M and W	57/64	1-21/64	1-25/32	2-21/32	3-17/32
c. Letter I and numeral	1-3/8	9/16	¾	1-1/8	1-1/2
d. All other letters and numerals	45/64	1-1/32	1-13/32	2-3/32	2-25/32

Kits. Letters and numerals of one size may be furnished in kit form. Unless otherwise specified in the contract or order, each kit shall contain the following quantities:

20 each: Letters E, I, S, T, A, L, N, O, R.
10 each: Letters B, C, D, F, G, H, J, K, M, P, Q, U, V, W, X, Y, Z.
20 each: Numerals 0 to 9 inclusive.

Notes. Other standard alphabets are as follows:


(a) Alphabets B, D, E and F of “Standard Highway Signs (SHS) 2004 Edition”.
(b) Block lettering as in figure 1.
(c) Styles as given in figure 2.

Ordering data. Procurement documents should specify the following in addition to the ordering data listed in the general specification:

(a) Whether letter, numeral, or letter and numeral kit is to be procured.
(b) Quantity of letters or numerals required if other than specified.
(c) If letter or numeral, which letter or numeral.
(d) Size of letters and numerals (height).
(e) Whether mounted or unmounted (see construction).
(f) Dimensions and configurations of letters and numerals, and dimensions of rectangles of mounted characters, if other than Series C Alphabet.
(g) If unmounted, whether translucent transfer sheet is required (see construction).

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:07Z
Check the source to verify that this is the current version before use.

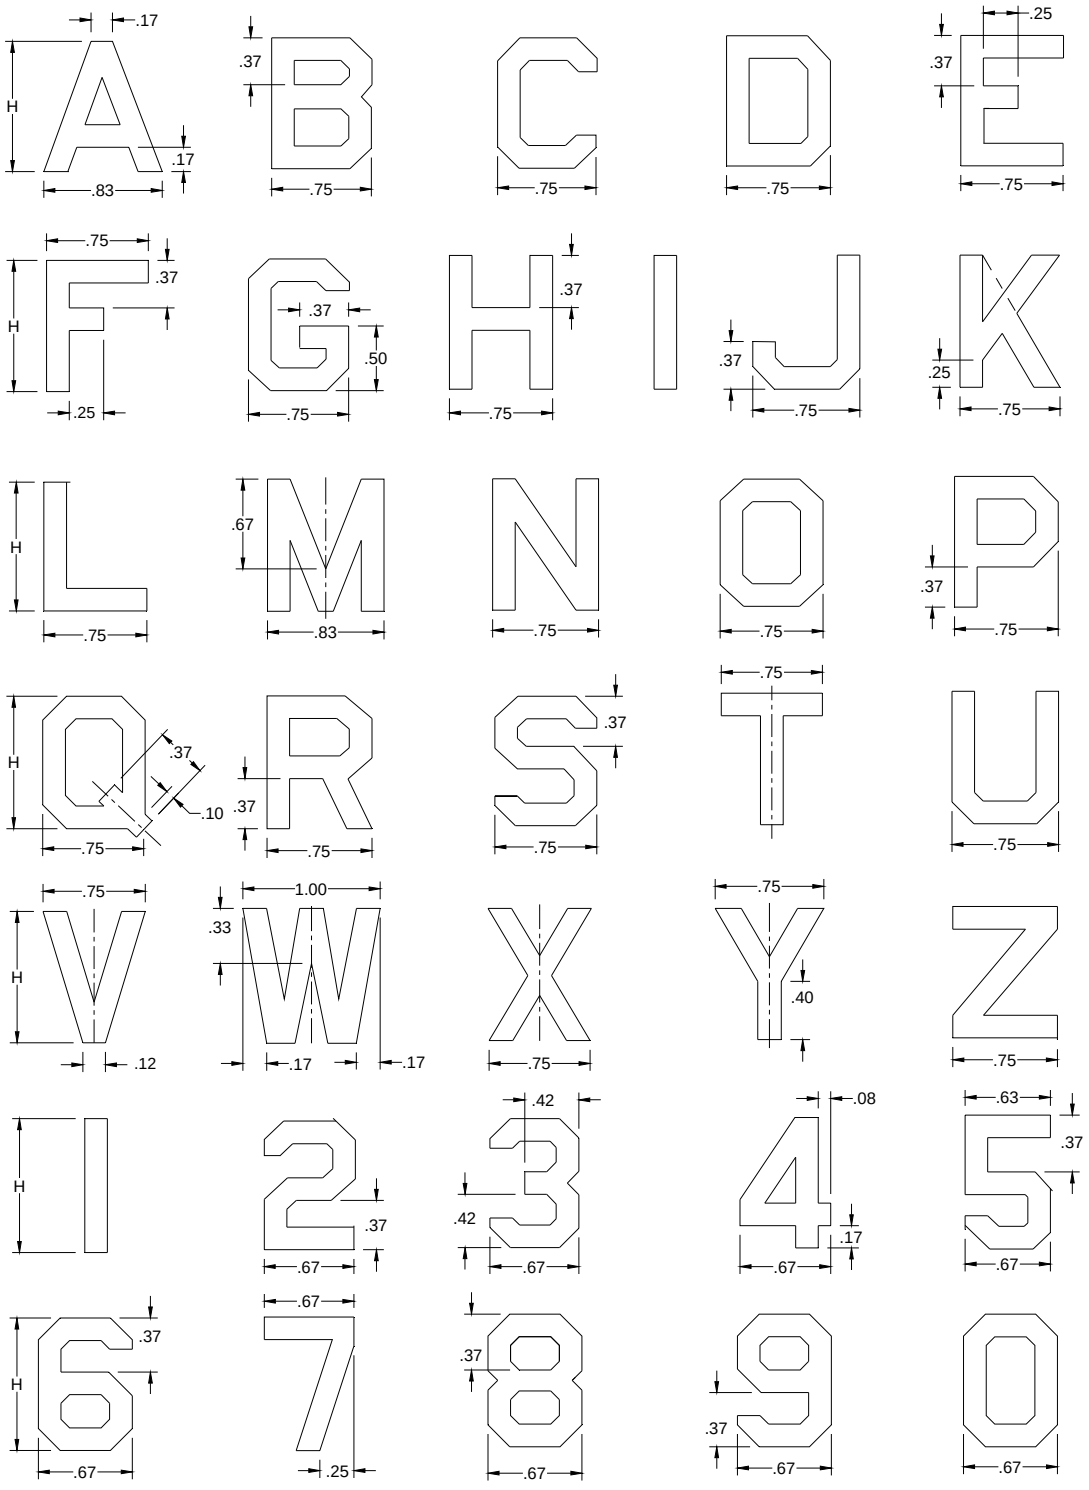

NOTES

1. All dimensions are decimal fractions of the height "H".
2. Width of bars used for letters and numerals is .17 (1/6) of the height "H".
3. Except where otherwise shown, all outside corner bevels shall be as follows.




FIGURE 1. Block letters and numerals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:07Z
Check the source to verify that this is the current version before use.

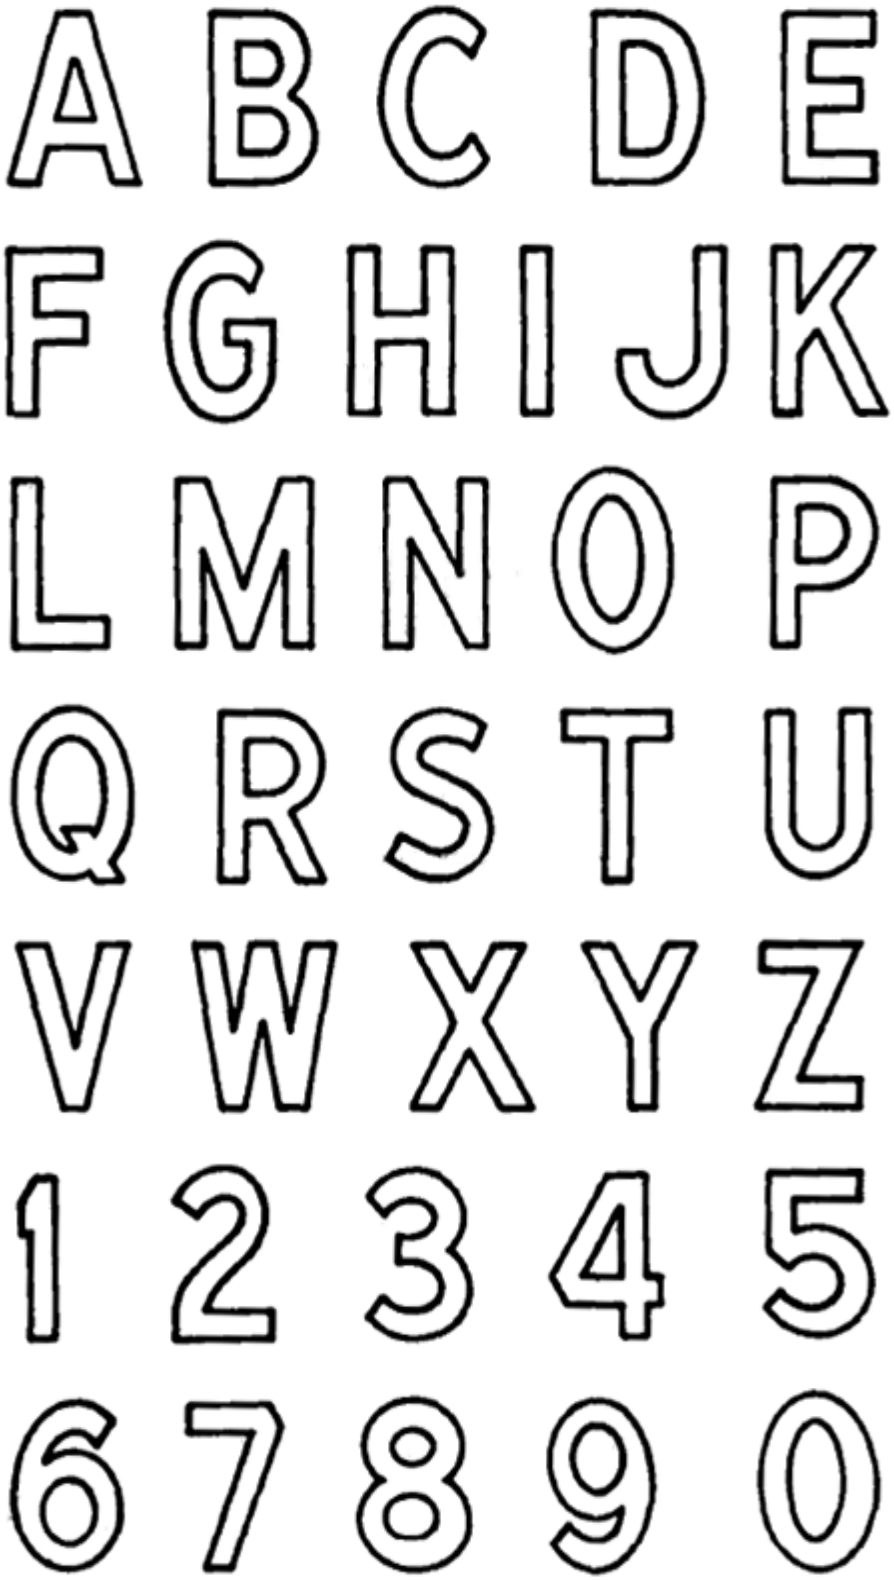


FIGURE 2. Style of vehicle marking letters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:07Z
Check the source to verify that this is the current version before use.

Custodians:
Army – GL
Navy – SA
Air Force – 99

Preparing activity:
DLA – IS

(Project 7690-2009-002)

Review activities:
Army – AT, AV, CR, MD
Navy – MC
Air Force – 84

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:07Z
Check the source to verify that this is the current version before use.