INCH-POUND

MIL-D-43732F
30 March 1990
SUPERSEDING
MIL-D-43732E
6 July 1987

MILITARY SPECIFICATION

DRESS, WOMAN'S, HOSPITAL DUTY UNIFORM (HDU)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a woman's dress made of twill weave, polyester/cotton cloth.

1.2 Classification. The dress shall be of one type in the following sizes, as specified (see 6.2).

Schedule of sizes

X-short	6	8	10	12	14	16				
Short	6	8	10	12	14	16	18	20	22	
Regular	6	8	10	12	14	16	18	20	22	24
Long	6	8	10	12	14	16	18	20		

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50083	-	Bag, Plastic, Folded Garment
V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106	-	Fastener, Slide, Interlocking
FF-P-416	-	Pin, Safety
CCC-C-438	-	Cloth, Buckram, Woven and Nonwoven
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-T-43548	-	Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-T-43624	-	Thread, Polyester, Spun
MIL-C-44270	-	Cloth, Polyester/Cotton, For Hospital Duty Uniform (HDU)

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

THE COLOR ASSOCIATION OF THE UNITED STATES

Standard Color Card of America

Department of Defense Standard Shades Color Card for Sewing Threads

(Color cards may be available from the Color Association of the United States, 343 Lexington Avenue, New York, NY 10016-0927. If color cards are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity.)

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

Method 88B - Appearance of seam in durable press items after repeated home laundering

Method 124 - Appearance of durable press fabrics after repeated home lauderings

(Application for copies should be addressed to the Executive Director, American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, Durham, NC 27709-2215.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3), in accordance with 4.3.

3.2 Guide samples. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.3 Material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.3.1 Basic material. The basic material shall be white polyester-cotton cloth conforming to type II of MIL-C-44270.

3.3.2 Lining material. The material for lining the skirt shall be white polyester/cotton cloth conforming to type I of MIL-C-44270.

3.3.3 Belt interlining. The material for interlining the belt shall be non-woven interlining cloth conforming to types I or IV, class 1 of CCC-C-438.

3.3.4 Thread. The thread for seaming, stitching, and buttonholes shall be White AH, C.A. 66050, cotton-covered or polyester-covered polyester, ticket Nos. 50, 2, or 3 ply, and 70, 2 ply, conforming to MIL-T-43548. Spun polyester thread, ticket Nos. 50, 3 ply, and 70, 2 ply, conforming to MIL-T-43624 may be substituted for the cotton-covered polyester thread.

3.3.5 Labels. Each dress shall have an identification label and instruction label or a combination identification and instruction label, and two size labels (one for dress and one for the belt). All labels except the belt size label shall conform to type VI of DDD-L-20. The belt size label shall conform to type IV. The fastness to laundering requirements of DDD-L-20 shall apply.

3.3.5.1 Identification label. The identification label shall conform to class 1.

3.3.5.2 Size labels. The size labels for the dress and belt shall conform to class 2. The size label for the dress shall include both the adjective (designating length) and numeric size. The size label for the belt shall include the numeric size only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

Weight, ounces per square yard 9.0 to 10.5

3.3.5.3 Instruction label. The instruction label shall conform to class 3 and shall contain the following information:

Washing Instructions:

Machine Wash (close slide fastener)
Use "Permanent Press" cycle. Wash separately from colored garments using warm water (100°F) and mild laundry detergent. Use only 2/3 regular load. Use commercial fabric softener to whiten and prevent clinging. Tumble dry using "Permanent Press" cycle (do not overload) and remove immediately from dryer. If automatic dryer is not available, shape and hang to air dry. If needed, touch up any wrinkled areas with a cool-warm iron.

Hand Wash
Wash separately from colored garments in warm water using mild laundry detergent. Rinse thoroughly. Shape and hang to air dry.

DO NOT WRING OR STARCH
DO NOT REMOVE THIS LABEL
DO NOT USE LIQUID CHLORINE BLEACH

3.3.5.4 Combination identification and instruction label. The identification (class 1) and instruction (class 3) labels may be combined into one label. The combination label shall conform to class 15.

3.3.6 Slide fastener. The slide fastener shall be polyester continuous monofilament (spiral or serpentine) type I, style 3, size LS in accordance with V-F-106 requirements. The length shall be 24 inches for all sizes. The color of the tape shall be white with matching chain, slider, pull, and stops. Also, continuous chain application may be used in lieu of preassembled fasteners, provided bottom and top stops are applied. Top stops may be securely sewn using either bartack or double-sewn stitching over fastener tape turn-in.

3.3.7 Safety pins. The safety pins used for fastening the buttons to the belt shall conform to class 2, size 1 of FF-P-416.

3.3.8 Snap fasteners. The snap fasteners for the front opening shall be round or square, sew-on type with rolled edges, size 0, 00, or 2-0, nickel plated, brass, and shall be rust and corrosion resistant (see 4.4.1.1).

3.3.9 Buttons. The buttons for the belt shall be polyester, DOD button shade White BA, C.A. 62031, conforming to type III, class E, style 5, 22-line of V-B-871, except that shank shall protrude from back of button not less than 5 nor more than 11 lines. A plastic shank may be substituted for metal shank, and pull strength requirements need not apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

3.4 Design. The dress is a one-piece step-in style with yoked shoulders and a bi-swing back, fly front with a slide fastener fly closure; inside hanging pockets with partitioned scissor pockets; open-necked collar; and is gathered at the front yoke and around the waist seam. The collar, front, and cuffs have five rows of pintucking on outer edges. A separate belt with two buttonholes in one end, has two half dome polyester metal shanked buttons with safety pins for attaching to belt by the wearer.

3.5 Patterns. Standard patterns will be supplied by the Government. The standard patterns provide a seam allowance of 1/4 inch for safety stitch seams except 1/2 inch for joining sides below the waist, 1/2 for joining cuff to sleeve, 3/8 inch for cuff turn-in; 1/4 inch for making and setting pocket welts, stitching collar ends and setting collar; making bi-swings and stitching pockets to dress. The standard patterns shall not be altered in any way and are to be used only as a guide for cutting contractor's working patterns. The working patterns shall be identical to the standard patterns.

3.5.1 Pattern parts. The components of the dress shall be cut from the materials specified in table I in accordance with pattern parts indicated.

TABLE I. List of pattern parts

Material	Nomenclature	Parts
	Collar	1/
	Cuff	1/
Basic material (3.3.1)	Front bodice	2
	Yoke	1
	Center back bodice	1
	Side back bodice	2
	Side body bi-swing	2
	Sleeve bi-swing	2
	Sleeve	2
	Right center front skirt	1
	Left center front skirt	1
	Side front skirt	2
	Pocket	4
	Skirt scissor pocket	1
	Center back skirt	1
	Side back skirt	2
	Insignia welt	2
	Belt	1 2/
Liner material (see 3.3.2)	Center front lining	1
	Center back lining	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

TABLE I. List of pattern parts (cont'd)

Material	Nomenclature	Parts
Non-woven interlining cloth (3.3.3)	Belt interlining	1
Templates	Collar marker	0
	Cuff marker	0

1/ The collar and cuffs are cut from fabric prepared with pintucks (see 6.7 e.).

2/ The belt may be roll cut providing its construction is in conformance with operation 5 of table II and it complies with the required finished measurements.

3.6 Seam appearance rating. After the finished dress has been washed and dried (see 4.4.4), the appearance rating of seams and stitching shall be as follows:

Area	Minimum Rating, Average of 3 Observations
Arm hole	3.5
Collar pintucking	3.5
Buttom hem	3.5
Side seams	3.0
Front fastener seam	3.0
Sleeve cuff seam	3.0
Back welt seam	3.0
Back yoke	3.0

3.7 Construction. The construction shall conform in all respects to the requirements specified in table II and herein. Figure 1 is furnished solely for guidance and information. Should variation from the written document appear in figure 1, the document shall govern.

3.7.1 Stitches, seams, and stitching. All stitches, seams, and stitching shall conform to FED-STD-751. The type of seam, stitching, and stitches per inch shall be as specified in table II. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, pleats, puckers, or open seams will occur (see 6.5). When two or more methods of seams or stitches are given for the same operation, any one may be used. When stitch type 401 is used, the looper (under thread) shall be on the inside of the dress. Thread tension shall be maintained so that no tight or loose tension will result (see 6.5). Overedge stitching shall be 3/16 to 1/4 inch wide. Raise stitching shall be 1/16 to 3/32 inch from the joining seam, unless otherwise specified herein.

Source: https://assist.dla.mil -- Downloaded: 20261O-21T22:10Z
Check the source to verify that this is the current version before use.

3.7.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched 1/2 inch minimum except when caught in other stitching or turned under in a hem. Ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.7.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks, skipped stitches, run-offs, or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch behind the end of the stitching. 1/

b. Except for prestitching, thread breaks, or two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch before the defective area and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.7.1.2 Type 304, 314, 401, 502, 503, 504, 515, 516, and 519 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.7.1.1.1a and 3.7.1.1.1b. Thread tension shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the materials sewn.

3.7.1.3 Bartacking. Unless otherwise specified, bartacks shall be 3/8 ± 1/16 inch long and 1/8 ± 1/32 inch wide, and shall contain 28 stitches. Bartacks shall be free from thread breaks and loose stitching.

3.7.1.4 Buttonholes. The buttonholes shall be straight cut, barred at both ends, with a finished cut length of 11/16 to 3/4 inch. The buttonholes shall be clean cut and correctly positioned with the stitching securely caught in the fabric. When a purl-type stitch is used, the purling shall be on the outside of the belt (as worn).

3.7.1.5 Eyelets. The eyelets for the buttons on the belt shall have an inside diameter of 3/16 to 1/4 inch with the bight of the stitching not less than 1/16 inch. The purling shall be on the outside with 19 to 24 stitches per eyelet.

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:10Z
Check the source to verify that this is the current version before use.

3.7.1.6 Automatic stitching. Automatic stitching machines may be used to perform any of the required stitch patterns provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met, and at least three or more tying, overlapping, or back stitches are used to secure the ends of stitching.

3.7.1.7 Thread ends. All thread ends that are visible on the finished item shall be trimmed to a length of not more than 1/4 inch unless otherwise specified.

3.8 Pressing. All pressing specified in table II shall be done with a heated pressing iron or machine (see 6.6).

3.9 Manufacturing operations requirements. The dress shall be manufactured in accordance with the operations specified in table II. Unless otherwise specified in table II, the contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching used to facilitate manufacture is permissible provided the thread is removed or does not show on the finished dress.

3.10 Use of automated apparel equipment. Automated apparel equipment may be used to perform any of the operations specified in table II, providing that the seam and stitch type are as specified and the finished component conforms to the required configuration. When a government finished shaper pattern is forwarded, the component shall conform to that pattern.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:10Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cut dress. a. Cut dress in strict accordance with patterns furnished which show directional lines, size, placement of pockets, breast pocket welts, and notches for proper assembly of all parts. Directional lines shall be placed in the warp direction. b. Cut basic material parts of dress out of one piece of material except collar, cuffs, belt, scissor pockets, and pockets which may be cut from ends. Collar, cuffs, and belt shall match the shade of the finished dress and the scissor pockets and the hanging pockets shall approximate the shade of the finished dress. c. Cut belt interlining from the materials indicated in table I. d. Prior to cutting the collar and cuffs, the material shall be pintucked (see operation 4). Cut collar and cuffs with the markers placed on the pintucked material as indicated by the pattern part. (see 6.7)						
2.	Replacement of damaged parts. Care shall be exercised during the spreading, cutting, and manufacturing operations to assure that material defects and damages, as classified in 4.4.2, are excluded and replaced with nondefective and properly shaded material.						

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T22:10Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Shade and size marking. Mark, ticket, or bundle all components, except those cut from ends, to insure uniform shade and size throughout the dress.						
4.	Pre-pintucking. Pintuck (see 6.6) the basic material with four uniform rows of tucking. The dimensions of the tucking, the spacing between the tucks, and the overall dimensions of the set of four rows (from the first line of stitching to the folded edge of the last tuck) shall conform to the standard sample (see 6.4 and 6.7 k.). The pintucking shall be lengthwise (warp wise) of the material and sets of rows shall be spaced to accommodate the placement of the collar and cuff patterns for cutting (see operation 1.d).	401	OSf-4	8-12	50	70	
5.	Make belt. a. Position and mark the size label to the face side of the material and to the inside of the belt when completed, centered and 2 to 3 inches from straight end.						
	b. Fold belt in half lengthwise, face side together, position interlining on belt and stitch side and point. Turn face side out and push out points.	301	SSa-1	8-12	50	70	
	c. Turn straight end seam allowance in and stitch 1/16 to 1/8 inch from edge. Continue edge stitching around periphery of belt.	301	SSc-1	8-12	50	70	

Source: https://assist.dla.mil -- Downloaded: 20260-21T22:10Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Make belt. (cont'd)						
	d. Make two buttonholes centered and parallel to the edges at the pointed end of belt, with the cut end of the first buttonhole 7/8 ± 1/8 inch from point of belt and the forward cut-end of the second buttonhole placed 2 ± 1/8 inches from the inner cut-end of the first buttonhole.	304 (whip) or 304 (purl)		46-52 per button-hole 46-52 per button-hole	50 50	70 70	
	e. Make three eyelets (centered), with the first eyelet 1-1/8 inches from end of belt and the second and third eyelet 1-1/2 ± 1/8 inches apart, measuring to center of eyelets.			19-24	50	50	
6.	Make scissors pockets.						
	With raw edge turned to the inside, turn the bottom of scissors pocket up 3/4 ± 1/8 inch and top of scissors pocket down 1/4 to 3/8 inch and stitch 1/16 to 1/8 inch from edge. Both top and bottom hems shall be turned to the inside of the finished pocket.	301	EFb-1	8-12	50	50	
7.	Make collar.						
	a. Fold collar lengthwise with the pintucking inside; stitch ends with edges aligned. Trim points, turn face side out pushing out points. The collar points shall be even and the folds of the pin-tucking shall be flat and face the same direction at the seam line. On the finished collar, the folded edge of the last row of pintucking shall be the outer edge of the collar.	301	SSa-1	8-12	50	50	

Source: https://assist.dla.mil -- Downloaded: 2020-10-21T22:10Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Make Collar. (cont'd)						
	b. Press collar smooth and flat keeping the edges and points worked out.						
8.	Make sleeves.						
	a. Superimpose the face side of cuff to the inside bottom edge of sleeve (pintucks going up) with edges aligned and stitch together.	301	LSq-2(a)	8-12	50	50	
	b. With seam allowance turned toward sleeve raise stitch 1/32 to 1/16 inch from seam edge.	301	LSq-2(b)	8-12	50	50	
	c. Turn cuff to face side of sleeve, turn seam allowance of top of cuff in and stitch 1/8 to 3/16 inch from turned in edge. On the finished sleeve the cuff top stitched seam allowance shall be the fifth row pin of tucking.	301	SSb-1	8-12	50	50	
9.	Make insignia welts.						
	a. Fold welts in half lengthwise, face side in, and stitch ends. Turn and work out edges and corners.	301	SSa-1	8-12	50	50	
	b. Over edge stitch raw edges together. or	503 or 504	SSa-1	6-8	70	70	
	c. Cut welts with clicker or die cutter, pre-crease ends 1/4 inch, fold welts in half face side out, and overedge raw edges together.	503 or 504	SSa-1	6-8	70	70	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Attached scissor pockets, identification and instruction or combination label to hanging pocket.						
	a. Position identification label or combination label (as applicable) to the face side at top of right upper hanging pocket (printing to face wearer) with the top of label 3/4 to 1-1/4 inches from top of pocket and centered between notch and front edge. Position instruction label (if applicable) directly below but not more than 1/2 inch from the identification label. Stitch labels on all four sides. The bottom of the identification label may be caught in the top row of stitching of the instruction label. The stitching shall not be visible on the outside of the finished dress and shall not be through the printing.	301	LSbj	6-12	50	50	
	b. Position a scissor pocket face up on face side of right underpocket, as indicated by pattern, turn in side edges and stitch sides and bottom edge to underpocket 1/16 to 1/8 inch from edge. Divide pocket by stitching as indicated on figure 1.	301	SSb-1	8-12	50	50	
11.	Make front bodice.						
	a. Position insignia welts on fronts, with the overedged edge toward shoulder, and stitch the overedged edge to the front. The mark on pattern indicates the stitch line.	301	LSbj-1	8-12	50	50	
	b. Turn welts up and stitch ends to front, 1/16 to 1/8 inch from edge.	301	LSbj-1	8-12	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T22:10Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Make front bodice. (cont'd)						
	c. Pintuck fronts (see 6.7) with five uniform rows of tucking. The dimensions of the tucking, the spacing between the tucks, and the overall dimensions of the set of five tucks (from the first line of stitching to the folded edge of the last tuck) shall conform to the standard sample (see 6.4).	401	OSe-5	8-10	50	70	
	d. Overedge facing and shoulder edges of fronts.	502 or 503 or 504		6-8 6-8 6-8	70 70 70	70 70 70	
	e. Tension stitch (shirr) shoulder and waist seams per marks on patterns, distributing the fullness evenly. The shirring at the waist shall begin after the pintucking and the length of the waist shirring shall be approximately the same as at the shoulder.	301		10-14	50	50	
12.	Make back bodice.						
	a. Position upper part of bi-swings to side backs, face sides together and edges aligned, and stitch in place.	301 or 401	LSq-2(a) LSq-2(a)	8-12 8-12	50 50	50 50	
	b. Turn seam toward bi-swing and raise stitch 1/16 to 3/32 inch from seam. Clip seam allowance, as necessary.	301	LSq-2(b)	8-12	50	50	
	c. Safety stitch upper and under bi-swings together face sides together and edges aligned.	515 or 516 or 519	SSa-2	8-12	50 (chain stitch) and 70 (overedge)	70 70	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Make back bodice. (cont'd)						
	d. Safety stitch center back to side backs face sides together, edges aligned and matching all notches.	515 or 516 or 519	SSa-2	8-12	50 (chain stitch) and 70 (overedge)	70 70	
	e. Safety stitch back to yoke, face sides together with back joining-seams turned towards center back and all notches matching.	515 or 516 or 519	SSa-2	8-12	50 (chain stitch) and 70 (overedge)	70 70	
	f. Tension stitch (shirr) back waist seam per marks on patterns distributing the fullness evenly.	301		10-14	50	50	
13.	Assemble bodice.						
	a. Safely stitch yoke to fronts, face sides together and notches matching at shoulder.	515 or 516 or 519	SSa-2	8-12	50 (chain stitch) and 70 (overedge)	70 70	
	b. Insert collar between fronts and front facings and stitch to end of facing; slash seam allowance at shoulder edge of facing and continue stitching undercollar to neck edge of dress, reversing procedure at other end of collar. Clip seam	301	SSa-1	8-12	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T22:10Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH.	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Assemble bodice. (cont'd)						
	allowances at curve. The shoulder seam allowance shall be turned toward the back. The collar ends shall be uniform in length and shall be even with the edge of the lapel. The collar may be pre-stitched to the neck edge of the fronts to hold in position for setting.						
	c. Trim corner of seam allowance at each end of collar. Turn facings to inside. Turn in raw edge of top collar and stitch down 1/16 to 1/8 inch from turned-in edge, catching the size label in the stitching at center back off-center tolerance.	301	LScf-2(b)	8-12	50	50	
	d. With the facings smooth and flat, stitch the shoulder edge of facings to the seam allowances of shoulders.	301	SSa-1	8-12	50	50	
	e. Safety stitch sleeves to armholes right and left respectively, face sides together, edges aligned and all notches matched. Yoke seams shall be towards yoke.	515 or 516 or 519	SSa-2	8-12	50 (chain stitch) and 70 (overedge)	70 70	
	f. Safety stitch side seams and sleeves closed with face sides together, raw edges, ends, and armhole seams aligned, and catching back bi-fold laying smooth and flat.	515 or 516 or 519	SSa-2	8-12	50 (chain stitch) and 70 (overedge)	70 70	

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T22:10Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
14.	Make skirt and attach hanging pockets.						
	a. Safety stitch skirt center fronts to side fronts, with face sides together, edges aligned and all notches matching.	515 or 516 or 519	SSa-2	8-12	50 (chain stitch) 70	70 70	
	b. Safety stitch one pocket piece to each skirt side fronts and side backs, face sides together, edges aligned, and all notches matching, continuing to the bottom of each skirt panel to overedge raw edges.	515 or 516 or 519	SSa-2	8-12	50 (chain stitch) 70 (overedge)	70 70	
	c. Safety stitch back and front hanger pocket plies together, face sides together and edges aligned, along front edge and across bottom curve.	515 or 516 or 519	SSa-2	8-12	50 (chain stitch) 70 (overedge)	70 70	
	d. Stitch skirt side fronts to side backs from bottom of skirt to above the bottom of hanger pockets and from below top of hanger pocket to waist (leaving pocket opening per marks on patterns) face sides together and edges aligned.	301	SSa-1	8-12	50	50	
	e. Safety stitch skirt center back to side backs, face sides together, edges aligned, and all notches matching.	515 or 516 or 519	SSa-2	8-12	50	50	
	f. Overedge stitch around the bottom of skirt with back seams towards the back and side seams and front seams towards the front.	502 or 503 or 504		6-8	70	70	
	g. Turn bottom of skirt to inside approximately 2-1/2 inches and stitch in place forming hem.	301	EFa-1	4-6	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Make skirt lining.						
	a. Safety stitch front and back lining panels together face sides together, edges aligned, and all notches matched.	515 or 516 or 519	SSa-2	8-12	50 (chainstitch) 70 (overedge)	70 70	
	b. Overedge stitch around the bottom of lining with side seams towards back and around front fly opening.	502 or 503 or 504	---	6-8	70	70	
	c. Turn bottom of lining to inside approximately 2 inches and stitch in place forming hem.	301	EFa-1	8-12	50	50	
16.	Assemble dress.						
	a. Overedge stitch left fly facing and around curve after clipping per marks on patterns.	502	---	6-8	70	70	
	b. With left fly out of the way of stitching, safety stitch right fly facing continuing to bottom of the skirt including left center front seam to close the front center seam.	515 or 516 or 519	SSa-2	8-12	50 (chainstitch) 70 (overedge)	70 70	
	c. Safety stitch skirt and lining (insides together) to bodice with face sides together, seams towards the back and all notches matched.	515 or 516	SSa-2	8-12	50 50 (chainstitch) 70 (overedge)	70 70 70	

Source: https://assist.dla.mil -- Downloaded: 2020-10-21T22:10Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Assemble dress. (cont'd)						
	d. Position left side of slide fastener to left front, face side up, per marks on patterns with the top extension turned under (between bodice and fastener) and stitch in place through all plies, 1/8 to 1/4 inch from edge of tape and across bottom of slide fastener.	301		8-12	50	50	
	e. Position right side of slide fastener, face down, on right front facing per marks on patterns. Turn under top of tape and stitch through all plies 1/8 to 1/4 inch from tape edge; continue stitching across tapes at bottom of chain, with the left front overlapped on right front (on inside of dress) forming front center pleat. NOTE: Care shall be taken to avoid puckering on right front fly stitching (see 6.5). On the finished dress, the slide fastener shall be flat without indications of stretching.	301		8-12	50	50	
	f. Sew the socket piece of a snap fastener above left slide fastener per marks on patterns with all stitches through all plies.	Hand or		3-4 double thread	50 or 70		
		101		21-22	50 or 70 per fastener		
		301		14-16	50 per fastener	50	

Source: https://assist.dla.mil -- Downloaded: 2026-01-21 22:10Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Assemble dress. (cont'd)						
	g. Sew the stud piece of a snap fastener above the right slide fastener corresponding to the socket piece on left front. The stitching shall not be through the front of the finished dress and the front shall lie smooth and flat when slide fastener and snap fasteners are engaged.	Hand or		3-4 double thread	50 or 70		
		101 or		21-22 per fastener	50 or 70		
		301		14-16 per fastener	50	50	
17.	Clean, press, and prepare for packing.						
	a. Trim all ends of threads and remove loose threads.						
	b. Press dress smooth and flat using sufficient heat, steam, and pressure to stabilize the seams and remove wrinkles, creases, and puckers. When pressing lapels, roll the seams to underside of lapels. Do not crease sleeves, pleats, or break-line of lapels.						
	c. Place two buttons and two safety pins in a commercial type envelope and put in left pocket.						
	d. Fold belt in quarters and place in right pocket.						

Source: https://assist.dla.mil -- Downloaded: 2020-10-21T22:10Z
Check the source to verify that this is the current version before use.

3.11 Finished measurements. The finished dress shall conform to table III. The measurements shall be taken with the slide fastener closed and the dress flat on a table.

TABLE III. Measurements in inches

Size	6	8	10	12	14	16	18	20	22	24	Tolerance
Half waist 1/	13	13-1/2	14	14-3/4	15-1/2	16-1/4	17	18	19	20	± 1/2
Half hip 2/	20-3/4	21-1/4	21-3/4	22-1/2	23-1/4	24	24-3/4	25-3/4	26-3/4	37-3/4	± 1/2
Full back length 3/											
X-short	36-1/2	36-5/8	36-3/4	36-7/8	37	37-1/8					± 1/8
Short	39	39-1/8	39-1/4	39-3/8	39-1/2	39-5/8	39-3/4	39-7/8	40		± 1/8
Regular	41-1/2	41-5/8	41-3/4	41-7/8	42	42-1/8	42-1/4	42-3/8	42-1/2	42-5/8	± 1/4
Long	44-1/4	44-3/8	44-1/2	44-5/8	44-3/4	44-7/8	45	45-1/8			± 1/4
Sleeve length 4/	4-1/2	4-1/2	4-1/2	4-1/2	4-1/2	4-1/2	4-1/2	4-1/2	4-1/2	4-1/2	± 1/4

1/ Half waist. Measure along waistline seam across dress from folded edge to opposite folded edge.

2/ Half hip. At a point 8 inches down from waistline seam, at center front, measure from folded edge to folded edge.

3/ Full back length. Measure down center of back from collar-to-neck joining seam to bottom of dress. This unhemmed length includes 2-1/2 inches for hemming.

4/ Sleeve length. Measure along underarm seam from base of armhole to sleeve bottom edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

3.12 Workmanship. The finished dress shall conform to the quality of product established by this specification and the accurance of defects shall not exceed the applicable acceptable quality levels (AQL).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.1.3 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3)
b. Quality conformance inspection (see 4.4)

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.2, 4.4.3 and 4.4.4.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:10Z
Check the source to verify that this is the currentversion before use.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.1.1 Component and material certification. A certificate of compliance may be acceptable as evidence that the snap fasteners conform to the requirement specified in 3.3.8.

4.4.2 End item visual examination. The end items shall be examined for the defects listed in table IV. The lot size shall be expressed in units of dresses. The sample unit shall be one dress. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects, 15 for major and minor A combined defects, and 40 for total major, minor A, and minor B combined defects.

TABLE IV. End item visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Pressing	Omitted (cloth wrinkled or creased, or seams not flat)		201	
	Sleeves, lapels, or pleats creased			301
	Front fold-lines and edge of lapels not creased			302
	Burned or scorched	101		
Material defects	Hole, cut, tear, smash, mend, exposed drill hole, open place, shade bar, multiple float, or loose slub:			
	1. On outside of dress	102		
	2. On inside of dress (longest dimension in any direction):			
	- up to 1/4 inch inclusive			303
	- more than 1/4 inch		202	
Shaded parts	Variation in shade within a part or between parts	103		
Cleanness	Spot or stain clearly noticeable:			
	1. On outside		203	
	2. On inside			304
	Five or more thread ends not trimmed, loose threads, or shade ticket not removed			305

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:10Z
Check the source to verify that this is the currentversion before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Cleanness (cont'd)	Basting or holding stitching visible on outside of dress			306
	Any marking visible on outside of dress		204	
Component and assembly	Any component not as specified	104		
	Any component part or required operation omitted (unless otherwise classified herein)	105		
	Any operation not performed as specified (unless otherwise classified herein)			307
Cutting	Any part not cut in conformance with warp directional lines indicated on patterns or not cut in accordance with specification requirements	106		
Pin-tucking	More or less than five rows	107		
	Dimensions of the tucking not in accordance with the standard sample (see 6.4)			308
	Fold of pin-tucking not along warp of the cloth		205	
Seams and stitching	Accuracy of seaming:			
	1. Any part of dress caught in an unrelated operation or stitching	108		
	2. Seam irregular, twisted, pleated, or wavy (unless otherwise classified herein)		206	
	3. Ends of stitching, when not caught in other seams or stitching, backtacked less than 1/4 inch (unless otherwise classified herein)			309
	4. Thread ends of darts less than 1/2 or more than 3/4 inch long			310
	5. Stitching overlapping end of thread break less than 1/2 inch			311

NOTE: Photographic standards for evaluating single needle seams are available from the American Association of Textile Chemists and Colorists (see 2.2)

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:10Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	6. Ends of a continuous line of stitching overlapped less than 1/2 inch on all stitching except labels, or less than three stitches on labels			312
	7. Poor seam appearance, puckered, or pleated	109		
	Gage of stitching and seam allowances:			
	1. Irregular, i.e., unevenly gaged or corresponding stitchings not uniformly gaged (to be scored only when condition exists along major portion of seam)		207	
	2. Width not as specified or not within range of gage specified, or varies more than 1/16 inch when no range is specified			313
	Stitches broken or missing:			
	1. All stitching except buttonholes, front fly, slide fastener, and overedging:			
	- up to 1/4 inch (inclusive)			314
	- more than 1/4 inch but not more than 1/2 inch		208	
	- more than 1/2 inch	110		
	2. Front fly or slide fastener stitching:			
	- any	111		
	3. Overedging:			
	- more than 1 inch			315
	Skipped stitches (except on button holes) or runoffs:			
	- 1/4 up to 1/2 inch in length			316
	- over 1/2 inch		209	
	Raw edge more than 1/4 inch long on outside		210	
	Raw edge more than 1/2 inch on inside			317
	Seam and stitch type:			
	1. Seam or stitch type not as specified		211	

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:10Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	2. Looper thread of 401 stitch type on outside of dress	112		
	Stitches per inch less than minimum or more than maximum specified (to be scored only when the condition exists for a distance of more than half the length of the seam):			
	- one stitch			318
	- two stitches		212	
	- three or more stitches	113		
	Stitch tension:			
	1. Loose tension resulting in loose seam	114		
	2. Loose tension (exposed loops of needle or bobbin thread)		213	
	3. Tight tension (on 301 stitching, stitches break when strain is applied in direction of seam)	115		
	4. Loose tension on bartacks			319
	Seam not worked out to edge (when required) having a depth between folds of 1/16 inch or more			320
	Any seam not turned in the direction specified		214	
Labels	Size (dress or belt), identification, instruction, or combination (if applicable) missing, incorrect, or illegible	116		
	Any label not stitched on all four sides (except belt size)			321
	Stitching through the printing of any label			322
	Any label not positioned as specified			323
Belt	Stitching anchoring interlining visible on outside of belt		215	
	Twisted, full, or puckered	117		
	Less than 1-3/8 inches or more than 1-5/8 inches wide		216	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Belt (cont'd)	Pointed end not worked out (having a depth between folds of 1/16 inch			324
	Irregular in width by more than 1/8 inch		217	
	Underside of belt exposed on outside more than 1/16 inch or for a distance of more than 1 inch			325
	Buttonholes:			
	1. End of cut opening of first buttonhole less 3/4 inch or more than 1 inch from pointed end		218	
	2. End of cut opening of second button hole less than 1-7/8 or more than 2-1/8 inches from end of cut opening of first one			326
	3. Off center of belt by more than 1/4 inch		219	
	4. Out of horizontal alignment by more than 1/8 inch		220	
	5. Cut length less than 5/8 inch or more than 11/16 inch			327
	6. One or both buttonholes omitted, or one or more added		221	
	7. Not specified type of buttonhole or not parallel to edges of belt		222	
	8. Ragged edges, incomplete stitching, or uncut buttonhole		223	
	9. Buttonhole stitching not securely caught in fabric (stitching can be pulled away from fabric)	118		
	10. One or more broken or more than two continuous skipped stitches in buttonhole		224	
	11. Tack (bar) on one or both ends of buttonhole omitted or insecure		225	
	12. Purling on buttonhole on underside of belt (when purl-type)			328
Eyelets	1. Omitted or incorrectly positioned	119		
	2. Not as specified		226	
Collar	Folds of pintucking on collar not flat or not facing in the same direction at the seamline at ends of collar		227	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Collar (cont'd)	Undercollar exposed at collar end by more than 1/16 inch		228	
	Twisted or tight, causing edges to curl up		229	
	Edges irregular		230	
	Ends poorly shaped or not uniform in length or shape		231	
	Points not worked out		232	
	Uneven in width by more than 1/8 inch		233	
	Pleats on collar or dress at collar joining seams (top collar or undercollar)		234	
Sleeves	Armhole seam staggered more than 1/8 inch at underarm joining seam		235	
	Armhole stretched or tight causing pleats on sleeve or body of dress	120		
	Armhole seam irregular			329
	Cuff less than 1-3/8 or more than 1-1/2 inches wide from cuff-to-sleeve joining seam to outer edge of cuff measured on inside of cuff			330
	Pintucking staggered by more than 1/8 inch at underarm joining seam of cuff		236	
	Folds of pintucking on cuff not flat or not facing the same direction at underarm seam			331
Front (bodice and skirt)	Outside fold of skirt pleat not turned toward left front	121		
	Shoulder edge of facing not stitched to shoulder seam allowance of dress or not smooth and flat			332
	Pockets:			
	1. Opening stretched (not smooth and flat)		237	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Front (bodice and skirt) (cont'd)	2. Openings unequally spaced from side seam by more than 1/4 inch		238	
	3. Right and left pocket openings not uniform		239	
	4. Bottom hem of scissor pocket less than 5/8 or more than 7/8 inch wide			333
	5. Top hem of scissor pocket less than 1/4 or more than 3/8 inch wide			334
	6. Part of scissor pocket or label stitching visible on outside of dress	122		
	7. Less than four compartments, or dimensions of compartments of scissor pocket not in conformance with detailed drawing on figure 1			335
	8. Straight compartment of scissor pocket not on side nearest side seam (one right and one left)		240	
	Snap fastener broken (not functional), missing, or loose	123		
	Stitching of snap fastener visible on outside of right front	124		
	Stud and socket of snap fastener not aligned at top and at waist causing distortion when engaged		241	
	Pocket welts out of horizontal alignment by more than 1/4 inch		242	
	Overedging omitted on inside edge of pocket welt			336
	Front exposed on outside of turned-back lapel by more than 1/16 inch		243	
	Collar end and front edge of dress uneven by more than 1/16 inch		244	
	Slide fastener defective affecting function	125		
	Slide fastener tape stretched or fabric stretched causing fullness, puckers, or pleats		245	
	Position of slide fastener:			
	1. Top of chain less than 3/16 or more than 5/16 inch below lapel step			337

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Front (bodice and skirt) (cont'd)	2. Edge of opened chain less than 3/16 (affecting function) or more than 1/4 inch from edge of left front			338
	Tack at top of slide fastener through front:			
	- left			339
	- right front		246	
	Raw edge of tape at top of slide fastener visible on outside of left front			340
	Fly front:			
	1. Stitching of right facing to front less than 1-3/8 or more than 1-5/8 inches from front edge	126		
	2. End of fly stitching on right front of dress less than 1-3/4 or more than 2-1/4 inches above top of slide fastener chain		247	
	3. Stretched at fold line		248	
	4. Slide fastener tape caught in the stitching	127		
	5. Fullness on dress front between outer edge and fly stitching	128		
	Bodice fronts uneven in length by more than 3/16 inch when slide fastener is open and right and left fronts are superimposed			341
	Interlining not securely caught in holding stitch along front edge of dress		249	
Back (bodice and skirt)	Bi-swing opening stretched (not smooth and flat)			342
	Bi-swing openings unequally spaced from armhole seam at yoke by more than 1/4 inch		250	
	Right and left opening of bi-swing not uniform			343
	One or more panel seams of back waist and back skirt out of alignment by more than 1/8 inch			344
	Waist seams staggered more than 1/8 inch at side seams			345

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Contents of pockets	Belt in left pocket, or envelope containing buttons and pins in right pocket			346
	Less than two buttons and two safety pins in envelope	129		

4.4.3 End item dimensional examination. The end items shall be examined for conformance to the dimensions specified in table III. Any dimension not within the specified tolerance and sleeves uneven in length by more than 3/8 inch shall be classified as defects. The lot size shall be expressed in units of dresses. The sample unit shall be one dress. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.4 End item seam examination. Samples submitted for examination shall be evaluated initially and after one laundering cycle following the label washing instructions. Evaluation shall be done by three trained observers working independently of each other. Test samples should be placed on a lighted viewing board (see AATCC TM 124) in such a manner that they lie flat on the surface of the board. The photographic standard for single needle seams shall also be placed on the viewing board. The observers shall stand directly in front but 4 feet from the test items. The observers shall then compare the test items to the photographic standard in each of the areas specified below and assign a rating to each area. The rating value assigned to an area by the observer shall be the numerical value of the photographic standard that most nearly matches that area. Seams appearing to fall between the numerical values of the photographic standard (see AATCC TM 88B) may be rated 2.5, 3.5, or 4.5. Rating values assigned by each of the observers shall be recorded. The average of the rating values assigned by each observer to the same area shall be the rating value for that area. If a range of 1.5 or more is noted between the highest and lowest value ratings of the three trained observers, then the evaluation for that area of observation should be discarded and be repeated by three new trained observers, if possible. One or more seams listed in 3.6 not meeting the minimum appearance rating shall be considered a defect. Two or more seams listed in 3.6 not meeting the minimum appearance rating on a sample unit shall be a defect. Any defective sample unit shall reject the lot. The sample unit shall be one dress. The sample size shall be as follows:

Lot size	Sample size (sample units)
800 or less	2
801 up to 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:10Z
Check the source to verify that this is the current version before use.

4.4.5 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete sealing or closure of flap, improper inadequate stapling, or loose strapping Bulged or distorted container
Content	Number of dresses per shipping container is more or less than required 1/ Size shown on one or more dresses not as specified on shipping container 1/

1/ For this defect, one shipping container in the sample shall be examined.

4.4.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A preservation. Each dress with slide fastener closed shall be neatly folded to approximate dimensions of 14 inches in length by 11-1/2 inches in width. Each folded dress shall be placed in a snug-fitting plastic bag conforming to
A-A-50083.

5.1.2 Commercial. Dresses shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial (see 6.2).

5.2.1 Level A packing. Twenty-four dresses of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Inside dimensions of each shipping container shall approximate 23 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall be closed and reinforced in accordance with method III, of the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.4.5. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Twenty-four dresses of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to class domestic, variety DW, grade 275 of PPP-B-636. Inside dimensions of each shipping container shall approximate 23 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.4.5.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the fiberboard container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636, and closed in accordance with method III as specified in the appendix of PPP-B-636.

5.2.3 Commercial packing. Dresses preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

5.3 Palletization. When specified (see 6.2), dresses packed as specified in 5.2.2 and 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147.

5.4 Marking. In addition to any marking required by the contract or purchase order, unit packs, shipping containers, and unitized pallet loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951.

5.4.1 Plastic bagged unit packs. Plastic bagged unit packs shall have the required identification information legibly printed or stamped in black, directly on the bag across the center face or on a white paper label inserted within the bag, so as to permit ready identification.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The dress is worn as a hospital duty uniform by female personnel of the Department of Defense.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is required (see 3.1, 4.3, and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2).
f. Type and class of unit load required (see 5.2.1).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:10Z
Check the source to verify that this is the current version before use.

6.4 Samples and shade samples. For access to samples of the end item, shade samples, and the standard sample for pintucking collar and cuffs, address the contracting activity issuing the invitation for bids or request for proposal.

6.5 Suggested sewing techniques. Experience has shown that if the following precautions are observed in using proper components and setting up the sewing machines, seam puckering will be held to an acceptable minimum level.

a. The needles used for all seams should be as fine as possible consistent with the size or diameter of the thread used.

b. The throat plate hole should be no larger than necessary to permit free entry of the needle and to prevent flagging.

c. The finest feed, approximately 18 teeth per inch, possible should be used with a presser foot to exactly match the shape and size of the feed. The face of the presser foot (underside next to the feed on the machine) should be highly polished to eliminate roughness and reduce drag. Diamond shaped feed teeth have been used quite successfully.

d. The lightest presser foot pressure should be used to prevent stretching of the top ply of material.

e. In the safety stitch machine for stitch types 515, 516, and 519, the upper and lower trimming knives should be kept at peak sharpness to prevent "dragging" of the edge of the fabric.

f. On stitch type 301 sewing, the bobbin tension should be adjusted so that when a full bobbin is placed in the bobbin case and threaded through the tension spring, the bobbin and case will ride slowly down the thread when the free end of the thread is held in the vertical position. Needle tension should be adjusted after the bobbin tension to provide slightly more needle thread than bobbin thread in the stitch.

g. When sewing with stitch type 401 (including the seaming row of the safety stitches) the thread ratio (needle and looper) should be adjusted to produce a stitch with 60 to 70 percent needle thread, and both needle and looper thread tension should be held to the minimum.

h. Thread takeup mechanism should be set on all machines to relieve as much tension as possible when forming the stitch. All thread contacts should be well polished and free of burrs, cuts, and rough spots.

6.6 Pressing. A properly sized form finisher is recommended for the final pressing. To attain the quality of garment established by section 4 and to facilitate the manufacturing process, under-pressing is recommended, with special attention given to the left and right front edges of the waist, rolling the seam to the underside of dress for the distance of the raise stitching and to the outside of the dress (underside of lapel) for the nonraise stitched portion, and creasing the folded edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

6.7 Critical instructions for pintucking construction methods.

a. 1-1/8 inch of material is needed for five pintucks.

b. If the same size pintucks are not generated by a purchased machine with accompanying folder, these patterns will be useless.

c. It is mandatory that the operator performing the pintucking operations makes sure that the first row of pintucking follows the pintucking patterns line nearest the front as denoted for those patterns representing the body.

d. The finished pintucks must face away from the center front of the garment, therefore, the pintucks on the fronts should be made by sewing from the top down on one front, and from the bottom up on the paired front in order to achieve this effect, while at the same time eliminating shading problems. This method makes it possible to use only one folder.

e. It is obligatory that pintucks for cuffs and collars be cut from fabric already prepared with the pintucks and that have been cut on the width of the fabric (filling), having enough width to accommodate respective pattern markers.

f. To prevent shading on these strips a means must be taken to denote direction of fabric so as to correspond to body fabric.

g. Markers to be used on strips show an arrow on the pattern to denote pintucking facing direction, and also a line to indicate the first row of pintucking.

h. Allowance for the fifth pintucking effect on both cuffs and collars has been made in the patterns so that this effect can be achieved by making a stitched fold.

i. The finished Dress Hospital Duty Uniforms shall show five front pintucks facing away from the center front, four collar pintucks to face downwards as worn, and four sleeve cuff pintucks to face upward.

j. Required stitching for the pintucking must reflect a 401 type stitching.

k. The total width from the first folded edge to the fifth folded edge shall be 9/16 inch (nominal) ranging from 1/2 inch (min.) to 3/4 inch (max.) for all pintucking. Each of the four pintuck folds shall be equally spaced to within 1/32 inch at a width of 1/8 inch (min.) to 3/16 inch (max.) when measured between each of the five folded edges. Also, the pintuck stitch lines shall be visually centered on each fold and approximate the same distance from each folded edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

6.8 Subject term (key word) listing.

Apparel
Clothing, hospital

6.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Army - GL
Air Force - 11

Review activities:

Army - MD
Air Force - 82, 99
DLA - CT

Preparing activity:

Army - GL

(Project 8410-0718)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

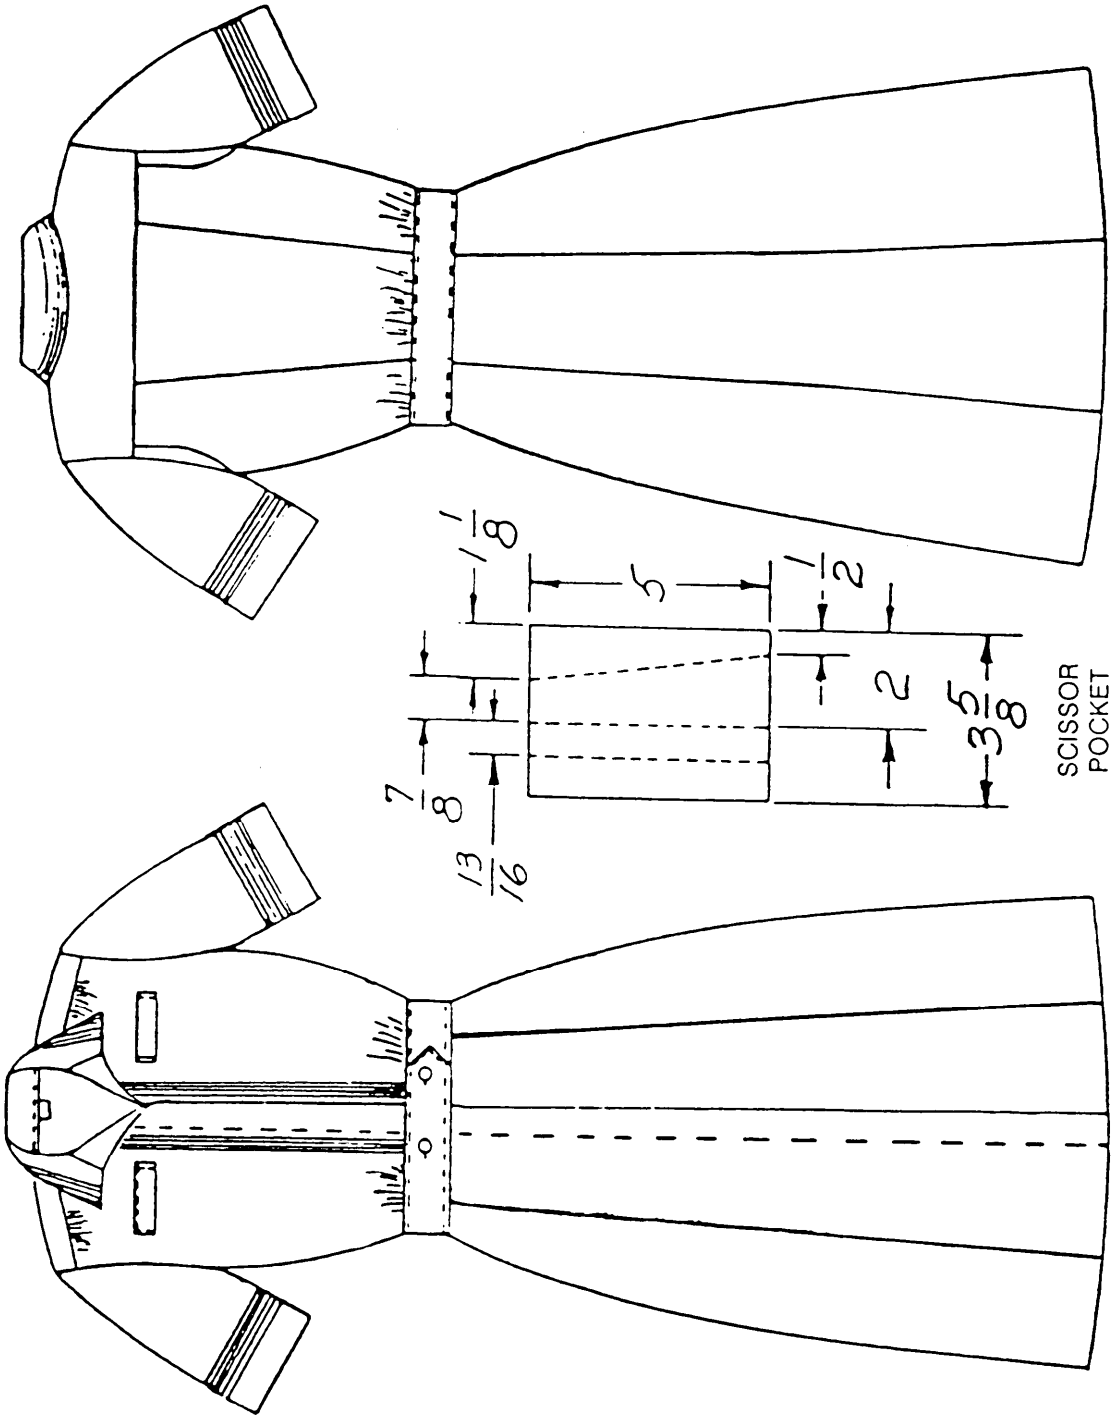


FIGURE 1. DRESS, WOMAN'S: HOSPITAL DUTY UNIFORM

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-D-43732F	90/03/30

3. DOCUMENT TITLE

DRESS, WOMAN'S, HOSPITAL DUTY UNIFORM (HDU)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
U.S. Army Natick RD&E Center	(1) Commercial 508-651-5221	(2) AUTOVON 256-5221
c. ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center ATTN: STRNC-ES Natick, MA 01760-5014	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil - Downloaded: 2026-02-10Z
Check the source to verify that this is the current version before use.

shall be exercised