29 May 1973
SUPERSEDING
MIL-S-43736
4 March 1971

MILITARY SPECIFICATION

SLIDE FASTENER UNITS, LACED BOOTS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for material and manufacture of slide fastener units.

1.2 Classification. The slide fastener unit shall be of one type in the following sizes as specified (see 6.2).

Size A - 8 eyelets for use with boot sizes 3 through 6-1/2 all widths
Size B - 9 eyelets for use with boot sizes 7 through 11-1/2 all widths
Size C - 10 eyelets for use with boot sizes 12 through 14 all widths

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-295 - Thread, Nylon.
PPP-B-636 - Boxes, Shipping, Fiberboard.

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods.
FED-STD-751 - Stitches, Seams, and Stitchings.

FSC 8430

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:11Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

DRAWING

ARMY NATICK LABORATORIES

Drawing 2-1-1060 - Slice Fastener Units, Laced Boots

(Figure 1 is a miniature reproduction of referenced drawing and is attached for information only.)

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Standard sample. The finished one inch and 3/4 inch tapes shall match the standard sample for weathering and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:11Z
Check the source to verify that this is the current version before use.

3.2 First article. When specified (see 6.2), the supplier shall furnish a sample for first article inspection and approval (see 4.3 and 6.4).

3.3 Material.

* 3.3.1 Slide fastener unit. The slide fastener chain shall consist of a nylon filament with a diameter of .047 ± .003 inch. The width of the coil chain when closed shall be .320 to .335 inch with a thickness of .112 to .125 inch (see 6.5). The stops shall be nylon. The slider shall be of the automatic locking type. It shall be of die cast zinc or zinc plated brass, and shall have a black chromated and lacquered finish. The slider pull shall be of the wire stirrup type and shall be corrosion resistant steel (stainless) wire. The length of the slide fastener chain including top and bottom stops shall be as shown on Drawing 2-1-1060. The slide fastener chain shall be stitched to a cotton warp, nylon filling tape and the weave shall be a two up and two down herringbone twill with one reversal in the center conforming to the requirements of table I, when tested as specified in 4.4.1. The dyed tape shall show colorfastness to weathering equal to or better than the standard sample (see 6.3) when tested as specified in 4.4.1. When no standard sample is established, the dyed tape shall show "good" fastness to weathering when tested as specified in 4.4.1. The color shall be black G Cable No. 66507.

TABLE I. Requirements for tape (one inch)

Width, inches	Weight, oz. per lin. yd. (minimum)	No. of yarns (minimum)		Warp breaking strength, pounds (minimum)	Yarn size (± 3 percent)	
		Warp	Filling		Warp	Filling
1 ± 1/16	0.30	72	42 or 84 1/	125	16/2	840 or 420 denier 1/

1/ 42 yarns per inch (1 yarn per shed) of 840 denier or 84 yarns per inch (2 yarns per shed) of 420 denier.

3.3.2 Tape, reinforcement. The eyelet reinforcement and bottom tape shall have a cotton warp and nylon filling and the weave shall be a two up and two down herringbone twill with one reversal in the center conforming to the requirements of table II, when tested as specified in 4.4.1. The dyed tape shall show colorfastness to weathering equal to or better than the standard sample (see 6.3) when tested as specified in 4.4.1. When no standard sample is established, the dyed tape shall show "good" fastness to weathering when tested as specified in 4.4.1. The color shall be black G Cable No. 66507.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:11Z
Check the source to verify that this is the current version before use.

TABLE II. Requirements for tape (3/4 inch)

Width, inches	Weight, oz. per lin. yd. (minimum)	No. of yarns (minimum) Warp	Filling	Warp breaking strength, pounds (minimum)	Yarn size (± 3 percent) Warp	Filling
3/4 ± 1/16	0.25	60	40 or 80 1/	100	16/2	840 or 420 denier 1/

1/ 40 yarns per inch (1 yarn per shed) of 840 denier, or 80 yarns per inch (2 yarns per shed) of 420 denier.

* 3.3.3 Thread. The nylon thread shall be size E conforming to type I or II, class 1, subclass A of V-T-295. The thread shall be dyed black and shall show fastness to weathering.

3.3.4 Eyelets and washers. The eyelets shall be of telescopic type with roll setting barrel, shall be made of aluminum sheet not less than 0.014 inch in thickness, and shall conform to the requirements shown in table III when tested as specified in 4.4.1. The washers (optional use) shall be made of aluminum sheet 0.013 inch in thickness, have a scored barrel and conform to the requirements shown in table III when tested as specified in 4.4.1 (see 6.6).

TABLE III. Eyelet and washer requirements

Eyelet	
Outside diameter of flange	0.453 ± .006
Outside diameter of barrel	0.222 ± .003
Length under flange	0.160 ± .008
Washer	
Outside diameter of flange	0.450 ± .006
Outside diameter of barrel	0.256 ± .003
Length under flange	0.120 ± .008

3.3.4.1 Finish. After fabrication, the eyelets shall be anodized and top roller coated or tumble coated with not less than two coats of black enamel.

Source: https://assist.dla.mil -- Downloaded: 20261O-21T22:11Z
Check the source to verify that this is the current version before use.

* 3.4 Design. The design of the slide fastener unit shall be a nylon filament fastener attached to one inch woven tape, and reinforced by 3/4 inch woven tape across the bottom below the bottom stop and lengthwise parallel to the nylon coil fastener. Eyelets are inserted through the reinforcement and slide fastener tapes, spaced in accordance with eyelet spacing of the combat boots as shown on Drawing 2-1-1060.

* 3.5 Construction. The construction shall conform in all respects to Drawing 2-1-1060 and shall be as specified herein.

* 3.5.1 Stitching machine. Unless otherwise specified, all stitching, except bartacking, shall conform to type 301 of FED-STD-751 with 8 to 10 stitches per inch.

* 3.5.1.1 Type 301 stitching. Unless otherwise specified, ends of all 301 stitching shall be backstitched or overstitched 1/2 inch minimum except where ends are turned under in a hem or held down by other stitching. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

* 3.5.1.2 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching.

b. Thread breaks, or two or more consecutive skipped stitches or run-offs noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and re-stitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

* 3.5.1.3 Automatic stitching. Automatic machines may be used to perform any of the required stitch patterns provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met; and at least three or more tying, overlapping or backstitches are used to secure the ends of the stitching.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:11Z
Check the source to verify that this is the current version before use.

* 3.5.1.4 Bartacking. Unless otherwise specified, bartacking shall be 1/2 ± 1/16 inch in length, 1/8 ± 1/32 inch in width and shall contain 28 stitches. Bartacking shall be free from thread breaks and loose stitching.

* 3.5.1.5 Thread ends. All thread ends shall be trimmed to a length of not more than 1/4 inch.

* 3.5.2 Finishing of tape ends. The ends of the eyelet reinforcement tapes and the bottom reinforcement tape shall be either seared or dipped 1/8 to 1/4 inch into a melted mixture of 50 percent paraffin and 50 percent beeswax heated to a temperature of 180° ± 20°F. The searing or dipping operation shall be accomplished prior to stitching.

* 3.5.3 Setting of eyelets with washers. Holes punched to receive the eyelets shall be smaller than the outside diameter of the eyelet barrels so that the barrels must be forced through the holes. The eyelets with washers shall be securely clinched in a manner that will prevent detachment from or cutting of, the surrounding material. The eyelets shall be clinched without splitting. The washers shall be on the back side of the slide fastener unit.

* 3.5.3.1 Repair of improper placement of eyelets. When eyelets are improperly aligned, the slide fastener unit may be repaired by removing the eyelets and reinforcement tape. New reinforcement tape shall be sewn to the front and also the back of the slide fastener tape to cover all holes. New eyelets shall then be installed.

* 3.6 Replacement of defective components. During the cutting and manufacturing process, components having material defects or damages that are classified as defects in 4.4.2.1 shall be removed from production and replaced with non-defective and properly matched components.

3.7 Workmanship. The finished slide fastener unit shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:11Z
Check the source to verify that this is the current version before use.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When required (see 6.2), the first article submitted in accordance with 3.2, shall be visually inspected as specified in 4.4.2.1 and 4.4.2.2 for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition testing shall be performed on components and materials listed in table IV. When the data in the "Number of determinations per sample unit" and "Results reported as" columns are not specified in table IV, they shall be as required by the referenced test method. All test reports shall contain the individual values utilized in expressing the final results. The lot shall be unacceptable if one or more sample units fail to meet any requirement specified. The sample size shall be as follows:

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 20260-21T22:11Z
Check the source to verify that this is the current version before use.

TABLE IV. Testing of components

Component and lot size expressed in terms of	Characteristic	Requirement paragraph	Test method	No. of determinations per sample unit	Results reported as	Sample unit
Slide fastener unit (excluding 1-inch tape)	Material identification	3.3.1	1/	-	-	-
	Diameter (nylon filament)	3.3.1	1/	-	-	-
	Width (chain when closed)	3.3.1	1/	-	-	-
	Thickness	3.3.1	1/	-	-	-
Tapes 3/4 and 1 inch (yd. full width)	Material identification	3.3.1 and 3.3.2	1200 and 1530 1/ 2/	-	-	-
	Yarn size	3.3.1 and 3.3.2	1/	-	-	-
	Weight (per lin. yd.)	3.3.1 and 3.3.2	5041 2/	-	-	3-1/2 linear yards
	Breaking strength (warp)	3.3.1 and 3.3.2	4108 2/	-	-	
	Total ends warp	3.3.1 and 3.3.2	5050 2/	-	-	
	Picks per inch	3.3.1 and 3.3.2	5050 2/	-	-	
	Weave	3.3.1 and 3.3.2	Visual	-	-	
	Colorfastness to weathering	3.3.1 and 3.3.2	5671 2/ 3/	-	-	
Eyelets and washers (1 pound each)	Material identification	3.3.4	1/	-	-	-
	Outside diameter of flange and barrel	3.3.4	Gage	2	Nearest .001 inch	2 eyelets and washers
	Length under flange	3.3.4	Gage	2	Nearest .001 inch	
	Finish (eyelets)	3.3.4.1	1/	-	-	-

1/ A certificate of compliance shall be submitted and will be acceptable for the stated requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:11Z
Check the source to verify that this is the current version before use.

2/ Refers to FED-STD-191.

3/ The time exposure shall be 40 standard fading hours.

* 4.4.2 Examination of the end item. The classification of defects shall be in accordance with 4.4.2.1 and 4.4.2.2. The acceptable quality levels (AQLs) and inspection levels shall be in accordance with 4.4.2.3. The sample unit for these examinations shall be one finished slide fastener unit. The lot size shall be expressed in units of one slide fastener unit.

* 4.4.2.1 Visual examination.

Examine	Defect	Classification Major	Minor
Operation of slider and chain and opening and closing the complete chain length	Cannot close chain the full required distance.	X	
	Does not operate freely, smoothly, or positively; i.e., binds, catches, or sticks at any point, or does not function properly.	X	
	Any element which is improperly mated or does not mesh with its corresponding elements when chain is in closed position.	X	
	Slider lock ineffective; i.e., does not retain slider when pull is in down position and when the open chain above the slider is lightly pulled apart.	X	
	Slider pull becomes detached during operation.	X	
	Slider goes completely beyond stop.	X	
	Slider disengages from either row of elements when chain is in close position.	X	
Finish of metal components	Finish missing.	X	
	Type of finish or color of finish not as specified.	X	
	Mottled, stained, scaly, or not uniform.		X
	Surface gritty, peeling, blistered, appreciably chipped, or area of no film.		X
Quality of metal components	Fractured, split or broken.	X	
	Malformed, damaged, bent out of shape, or otherwise impaired:		
	- Seriously affecting serviceability or appearance.	X	
	- Affecting serviceability or appearance but not seriously.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:11Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Quality of metal components (cont'd)	Sharp burr, splinter, sharp fin, or sharp edge.	X	
Quality of tape	Cut, hole, tear, or other fabric imperfection.	X	
	Color other than specified.		X
	Oily, soiled, stained, spotted, shade bar, or streak.		X
Construction and workmanship (general)	Fastener is not type or not style specified.	X	
	Any required component missing.	X	
	Any required operation omitted or not properly performed.	X	
	Component misplaced, loose, or not in proper alignment.	X	
Chain and tape	Any element not firmly or not securely attached to tape.	X	
	Dirt or other foreign matter embedded between elements.		X
	Tape spliced.	X	
	Slider reversed or inverted.	X	
Stops	Any required stop not as specified.	X	
	Stop not in required location or incorrectly placed.		X
	Stop not firmly attached.		X
Eyelets and washers	Not specified type or size.		X
	Not securely clinched.		X
	Not spaced evenly or horizontal alignment of eyelets not as specified.	X	
	Set with face of eyelets on inside of slide fastener unit.		X
Seams and stitching	Not specified seam or stitch type.	X	
	Any row of stitching missing.	X	
	Less than 8 but not less than 6 stitches per inch.		X
	Less than 6 stitches per inch.	X	

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:11Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Seams and stitching (cont'd)	More than 10 stitches per inch.		X
	Stitching of chain broken or cut.	X	
	Needle holes or needle chew:		
	- Seriously affecting serviceability or appearance.	X	
	- Affecting serviceability or appearance but not seriously.		X
	Any open seam not repaired.	X	
	Repair of open seam not as specified.		X
	(A seam shall be classified as open when two or more continuous skipped stitches or runoffs occur or when one or more stitches joining a seam are broken. On multiple stitched seams, a seam is considered open when either one side or		
	Loose stitch tension resulting in a loosely secured seam.	X	
	Tight stitch tension resulting in a puckering of tape or slide fastener unit.	X	
	Any bartack omitted.	X	
	Bartack stitching loose, incomplete or broken.		X
Thread ends	Thread ends not trimmed throughout slide fastener unit.		X
Tape ends (3/4 inch)	Ends not seared or dipped.		X

* 4.4.2.2 Dimensional examination. The slide fastener unit shall be examined for defects in dimensions. Any dimension that is not within the established tolerance shall be classified a defect.

* 4.4.2.3 Inspection levels and AQLs. The inspection levels and AQLs expressed in defects per hundred units shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:11Z
Check the source to verify that this is the current version before use.

Examination	Inspection level	AQL Major	AQL Total
For defects applicable to 4.4.2.1	I	1.5	4.0
For defects applicable to 4.4.2.2	S-3	-	4.0

* 4.4.3 Examination of preparation for delivery requirements. An examination shall be made to determine that the packaging, packing and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Markings, exterior and interior	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing or not as specified. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components such as: incorrectly fabricated bag, crooked or non-continuous heat sealed seams, incomplete closure of polyethylene bag and container flaps, air hole in bag missing or incorrectly made, loose strapping, inadequate stapling, improper taping. Bulged or distorted container.
Content	Number of interior packages per shipping container is more or less than required. Number of slide fasteners per interior package is more or less than required. 1/

1/ For this defect, 5 interior packages from each shipping container in the sample shall be examined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:11Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

* 5.1.1 Level A. Ten pair (20 each) of slide fasteners of one size only shall be neatly bundled full length and securely tied in the center with cotton tape or twine. The bundle shall then be packaged in a close-fitting clear polyethylene film bag. The bag shall be fabricated from polyethylene film having a thickness of 0.0015 inch (± 20 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The bag may be fabricated from polyethylene film tubing or sheeting. The bag closure shall be effected by heat sealing with the heat seal made as close as possible to the open end. One corner of the bag shall have a 1/4 inch diameter hole to permit expulsion of excess air from within the bag.

5.1.2 Level C. Slide fasteners shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

* 5.2.1 Level A. Five hundred pair (50 packages) of slide fasteners of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each fiberboard container shall be fitted with a taped box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. The 50 level A packages shall be neatly arranged in a manner to insure a well-filled container. Inside dimensions of each shipping container shall approximate 31 inches in length, 14-3/4 inches in width, and 13-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of the container specification. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

5.2.2 Level B. Five hundred pair (50 packages) of slide fasteners of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped box liner conforming to class domestic, variety DW, grade 275 of PPP-B-636. The 50 level A packages shall be neatly arranged in a manner to insure a well-filled container. Inside dimensions of each shipping container shall approximate 31 inches in length, 14-3/4 inches in

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:11Z
Check the source to verify that this is the current version before use.

width, and 13-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

* 5.2.2.1 When specified (see 6.2), the fiberboard shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the container specification.

5.2.3 Level C. Slide fasteners, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

* 5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

5.3.2 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly printed or stamped thereon and under these words shall be legibly printed or stamped the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The slide fasteners are intended for use in conjunction with the tropical combat boots worn by troops in area zones I and II.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Size required (see 1.2).
(c) When a first article is required (see 3.2, 4.3 and 6.4).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 20261O-21T22:11Z
Check the source to verify that this is the current version before use.

6.3 Samples. For access to samples, address the procuring office issuing the invitation for bids.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample consisting of one slide fastener unit in any size. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for inspection and approval of the first article.

6.5 The size-09 nylon coil chain fastener manufactured by Talon, Division of Textron, Inc., Meadville, Pennsylvania meets the requirements of this document. This information is furnished only to indicate a possible source of supply. Any manufacturer's item which is equal to the referenced commercial type item will be acceptable.

6.6 The style No. 404 eyelet and style No. 202 washer, manufactured by United Shoe Machinery Corporation, Shelton, Connecticut meet the requirements of this document. This information is furnished only to indicate a possible source of supply. Any manufacturer's item which is equal to the referenced commercial type item will be acceptable.

* 6.7 Marginal identification. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - SA
Air Force - 11

Review activity:

Army - MD

User activity:


Navy - YD

Preparing activity:

Army - GL

Project No. 8430-0174

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:11Z
Check the source to verify that this is the currentversion before use.

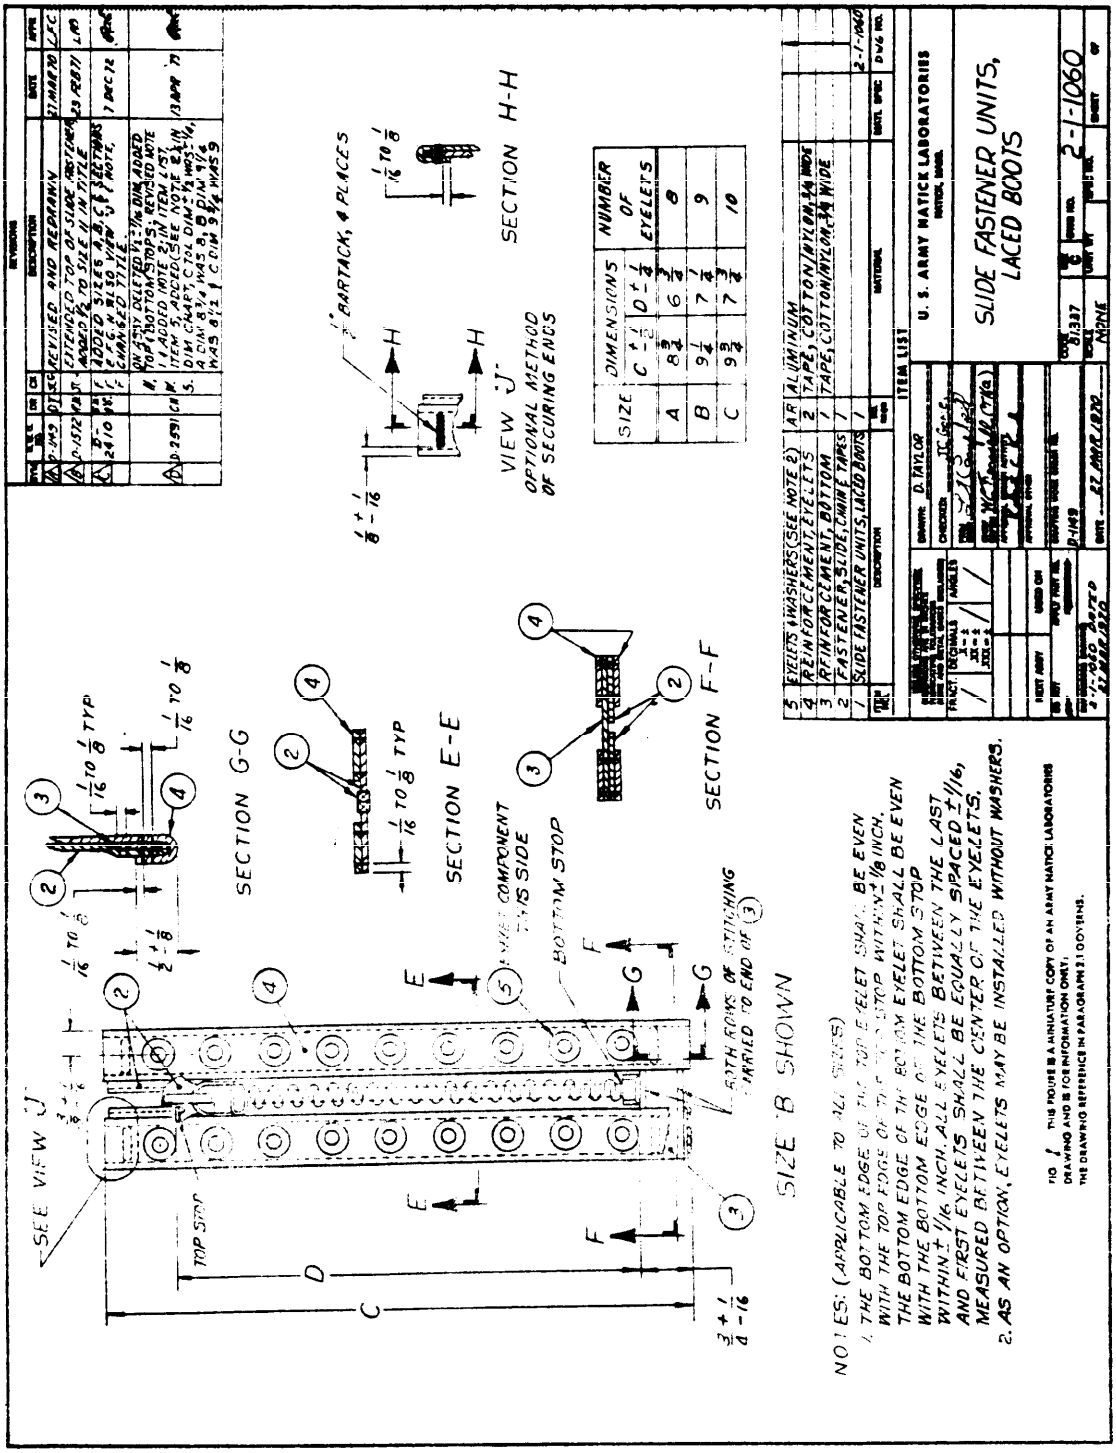

☆ U. S. GOVERNMENT PRINTING OFFICE: 1973-714-918/1345

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:11Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development
Laboratories
ATTN: DRDNA-ES (Mr. D. Luppino)
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:11Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:11Z
Check the source to verify that this is the current version before use.