MIL-M-38777A(USAF)
1 October 1969

SUPERSEDING
MIL-M-38777(USAF)
17 October 1966

MILITARY SPECIFICATION

MANUALS, TECHNICAL: INSPECTION, LUBRICATION, AND MAINTENANCE REQUIREMENTS WORK CARDS: INSPECTION, LUBRICATION, AND MAINTENANCE REQUIREMENTS

(For Ground Communication–Electronic and Meteorological (C–E–M) and Related Equipment)

1. SCOPE.

1.1 This specification provides instructions for preparing technical manuals and work cards to satisfy inspection, lubrication, and maintenance requirements for ground C–E–M equipment.

2. APPLICABLE DOCUMENTS.

2.1 The following documents, of the issue in effect on the date of invitation for bids, or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-M-38784	Manuals, Technical: General Requirements for Preparation of
MIL-M-4410	Manuals, Technical: Title Page and List of Effective Pages; Certificate of Destruction Page; Transmittal Notice; Reproduction Assembly Sheet; Photolithographic Negatives; Printing; and Binders
MIL-P-38790	Printing Production of Technical Manuals: General Requirements for

PUBLICATIONS

Technical Order

42B1-1-15	Cross Reference—NATO Interchangeability of Aviation Fuels, Lubricants and Allied Products

AFLC Manual

66-2	Maintenance — Engineering, Operations and Management

(Copies of documents required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS.

3.1 *General*

3.1.1 An inspection requirement manual shall be prepared for ground C–E–M equipment in all cases where time change or base level repair restrictions are applicable except as stated under the provisions of 3.6 and 3.6.2.

3.1.2 Manuals shall contain all inspection, lubrication, and maintenance requirements that are accomplished at scheduled intervals, including special event orientated requirements, time replacement items and base level repair restrictions.

3.1.3 Work cards shall contain all scheduled inspection, lubrication, and maintenance requirements that are contained in the inspection requirements manual arranged in checklist form to assure logical order of accomplishment and assure that no item is overlooked.

3.1.4 Indirect support equipment, e.g. public utility installations real property equipment, etc., and items of common and standard handling, test or hardware equipment, will not be included in documents provided by this specification unless otherwise specified by the procuring activity. When real property equipment is in direct support

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

of the end item of the weapon system or support system and the same maintenance activity is responsible for both, then this specification shall be followed.

3.1.5 The lubrication data shall show lubrication requirements for all parts requiring regular lubrication. Charts and figures, when used, shall cover systems, assemblies or components logically grouped together to show an easily understood and orderly presentation of the lubrication requirements.

3.2 *Recommendations and determinations.* The contractor shall recommend the components of the equipment to be inspected, serviced and lubricated. The contractor shall also recommend the inspection, servicing and lubrication requirements for these components of the equipment. These requirements shall be based on engineering/maintenance statistical data, and on the best available reliability/maintainability data. Inspection intervals shall be expressed in calendar time, limited to, but not necessarily including daily -7-14-21-28-42-56-84-168 and 364 day intervals. Equipment to be inspected, serviced or lubricated at intervals other than those listed, or at the expiration of elapsed operating hours, shall be included as special event orientated requirements. Final determination of what is to be inspected, frequency of inspections, and inclusion of standard in-service operational limits is subject to procuring activity approval.

3.2.1 The contractor shall determine and include, in accordance with a realistic frequency of inspection, the operational performance checks and tests required to maintain the equipment within minimum performance standards. Operational performance checks/tests shall be stated (with the applicable noun first for the specific operational condition sought) and shall be designed to produce tangible results in terms of units of measurement.

3.3 *Operational performance checks/tests.* When specified by the procuring activity, the inspection requirement statement for operational performance checks/tests shall be augmented by subparagraphs below the inspection requirement to include step-by-step procedures specifying how to perform the operational check/test until the specific operational condition sought is achieved.

3.3.1 The first subparagraph of the step-by-step maintenance performance procedure shall depict the test equipment, number of personnel, special tools, and materials required to accomplish the operational check/test. Subsequent subparagraphs shall contain the actual step-by-step operational procedures and shall be in the form of terse instructions written to the skill level of an operator that is familiar with the equipment operation and the test equipment involved.

3.3.2 Examples of scheduled operational performance checks/tests are:

Voltage Standing Wave Ratio Checks
Sensitivity Checks
Signal Noise Ratio Checks
Minimum Discernible Signal Checks
Frequency Checks
Electrical Mechanical Characteristics Test

3.3.3 Visual inspection requirements shall not be augmented to include the "how-to-do" maintenance performance procedures. Whenever visual inspection requirements or servicing requirements specify certification of specific torque values, clearances, tolerances, voltages, meter readings, pressures, quantities, etc, the specific value(s) sought shall be included in parentheses after the inspection requirement statement or included as subparagraph(s) below the inspection requirement statement, whichever is considered feasible. Charts, frequency diagrams, oscilloscope patterns, etc, shall also be included below the inspection requirement statement whenever information of this type is essential to illustrate or amplify the specific condition sought.

3.4 *Preparation.* Reproducible copy and negatives of text and illustrations shall be prepared in accordance with the requirements of MIL-M-4410, MIL-M-38784 and MIL-P-38790. Work cards shall be in 8 by 4 inches format (horizontal position) and prepared so that back to back pages can be printed head to foot. When the reproducible copy is prepared by a mechanized method, the requirements of AFLCM 66-14, Chapter 9, are applicable.

3.4.1 *Abbreviations.* Use of abbreviations shall be in accordance with the requirements of MIL-M-38784.

3.4.2 *Security classification.* The contents of the basic documents shall be so arranged and worded that they will be unclassified. If classified information is applicable, it shall be contained in a classified supplement. The security classification shall be determined by the procuring activity.

3.4.3 *Notes, cautions, and warnings.* Notes, cautions, and warnings in manuals and work cards shall be prepared in accordance with MIL-M-38784.

3.4.4 *Stating requirements.* Each requirement (inspection, servicing and lubrication) shall be a clear and concise statement of the condition sought or the operation required to obtain a desired condition. Inspection requirements shall reflect a realistic scope of inspection. The requirements shall not require inspection for general condition,

Source: https://assist.dla.mil -- Downloaded: 202640-21T15:26Z
Check the source to verify that this is the current version before use.

damage or include all possible conditions and minor deficiencies that can occur. The intent of inspection requirements is to inspect items for the predominant deficiencies expected through normal operational environment, which, if not corrected, will result in equipment manfulction.

3.4.4.1 The format for stating inspection requirements shall begin with the noun of the equipment to be inspected followed by the specific condition sought. Operational performance inspection requirements shall reflect the operational condition sought. Visual inspection requirements shall reflect the adverse condition sought. Servicing requirements shall reflect the actual service to be performed. Lubrication requirements shall list the noun, followed by a separate statement below the noun depicting the lube application involved, with total number of lube points shown in parentheses after the lubrication statement.

3.4.4.2 Typical examples of inspection requirements are:

a. Condensor C-108 for oil leaks.

b. Test point 219 for specified voltage (280 volts AC ± 5V).

c. Transmitter air filter for cleanliness.

d. Antenna for cracks and corrosion.

e. Receiver-transmitter RT-278( )/GR, receiver for complete sensitivity and signal plus noise-to-noise ratio performance check. (Reference TO 31R1-2GRC27-2).

(Item "c", above, is an exception to the adverse condition sought but is permissible since the word "cleanliness" produces a desired result.)

3.4.4.3 Typical examples of servicing requirement statements are:

a. Reservoir serviced. (Fill with hydraulic oil, SPEC MIL-H-5606, to top of filler port.)

b. Power supply coolant filter, remove and replace.

3.4.4.4 Typical examples of lubrication requirement statements are:

a. Antenna Gimbal:

Apply grease at fitting provided. (2 places)

b. Pedestal Arm:

Clean and lubricate with light oil, wipe excess. (1 place)

3.5. *Inspection and maintenance requirements manual.* Normally, one inspection requirements manual shall be prepared for the complete ground C-E-M equipment. However, when complex systems or sets are of sufficient magnitude to warrant more than one manual, the procuring activity shall identify the specific separate inspection requirements manuals for the set involved.

3.5.1 *Extent of coverage.* The manual(s) shall include a complete program of scheduled inspection, servicing and lubrication requirements, special inspection and maintenance requirements, acceptance inspection requirements, depot level inspection requirements, time change items and repair restrictions for those items authorized as base level repairs. The manual(s) shall identify all essential requirements at the maximum permissible intervals. No requirement shall be omitted because the requirement would not be applicable until after the expiration of a long interval of service or because it would create a heavy workload. The necessity of a requirement shall be given full consideration so that the equipment is not over-inspected.

3.5.2 *Basis.* Requirements shall be based on engineering/maintenance statistical data and the contractor's recommendations which are founded on the best available reliability/maintainability data. Requirements must permit achievement of the required degree of operational readiness. The criteria on which requirements shall be based are as follows:

3.5.2.1 Repetitive inspections which will guard against hazards that could contribute to equipment damage and adversely affect personnel safety.

3.5.2.2 Inspections which assure that systems, assemblies and components checked or removed during course of scheduled maintenance are secure or properly reinstalled.

3.5.2.3 Inspections, including power on or operation of equipment, which will assure the early detection and correction of defects before they become serious.

3.5.2.4 Inspections which will assure early recognition of corrosion or corrosion producing conditions.

3.5.2.5 Requirements which will assure that inspection, test, replacement, etc, needed on a recurring basis are accomplished.

3.5.2.6 Continuous monitored equipment which is considered self inspected will require no repetitive inspections unless, if allowed to fail, would cause damage that will affect the operational capability of the equipment or create a safety hazard.

3.5.2.7 Items that require scheduled servicing and lubrication.

3.5.2.8 The impact a component failure will have upon the remainder of a functional system and the impact of a part failure in a component. If visual inspection or other non-destructive inspection can be utilized to detect wear or other evidence of impending failure, then those factors should be weighed in determining scheduled maintenance.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:26Z
Check the source to verify that this is the current version before use.

When preparing structural inspections, consideration should be given to determining what stresses are applied to the structure and what structural components are likely to be affected.

3.5.2.9 Consideration of the geographical, environmental conditions, physical layout and design in respect to the operational and maintenance plans of the set or system, in order to state and qualify the requirements realistically. When the design of a set or system dictates requirements of a functional nature, which simultaneously involves several sets or equipment that together make up a functional system, the manual may be broken out by functionally integrated systems, as necessary, under suitable headings.

3.5.3 *Exclusions*. The following shall not be covered:

3.5.3.1 Luxury items, such as decals, paint, etc, on a recurring basis. (Paint used for corrosion prevention is not considered a luxury item and must be inspected on such systems.)

3.5.3.2 Items which do not indicate the operational capability of the end item, e.g., black boxes or brackets.

3.5.3.3 Items whose failure would not affect the operational capability of the end item; e.g., console doors (excluding safety interlocks) of equipment not constantly in use.

3.5.3.4 Items that are looked at daily, such as a gage on a console that is in use daily, a light that is monitored continuously, or a console door that is opened and closed to facilitate operation and inspection.

3.5.3.5 Inspection of subassemblies, such as printed circuit boards, air conditioning units, transmitters and related components, removed from the operational environment and returned to the repair facility.

3.5.3.6 Maintenance performance procedures which outline how to accomplish a scheduled operational performance check/test. However, if the requirement for augmented maintenance performance procedures has been authorized by the procuring activity and work cards are not to be prepared for use in conjunction with the manual, the manual shall include all requirements, maintenance performance procedures, visual inspection values, charts and illustrations that are normally associated with the work cards.

3.5.4 *Inspection frequency*. To simplify recording and scheduling of inspections, all inspection intervals (other than daily inspections) shall be divisable by the lowest interval. To the extent possible, inspection frequency shall be established to equate all requirements to the same unit of measure such as daily, 7 days, 14 days, etc.

3.5.5 *Page numbering*. The requirements of MIL-M-38784 are applicable except, since sections of the manual are divided into parts, the part letter shall be a portion of the page number; thus Section I, Part A, Page 1, shall be shown as 1A-1; Section II, Part B, Page 2, shall be shown as 2B-2. When the reproducible copy of a manual is prepared by a mechanized method, a hyphen shall precede the letter and one or two zeros, as necessary, shall precede the page number (when under 100); thus Section I, Part A, Page 1 would be 1-A-001; Section II, Part B, Page 10 would be 2-B-010. When Sections I and II are divided into parts, the page numbers for Sections III and IV shall show the letter A even though these sections are not divided into parts so that page numbering for the whole manual is consistent. (See figure 12).

3.5.6 *Arrangement*. The manual shall be arranged and divided into sections as follows:

Title Page
List of Effective Pages
Table of Contents
Introduction
Section I—Scheduled Inspection, Servicing and Lubrication Requirements
Section II—Special Inspection and Maintenance Requirements (includes Depot Level Requirements, Acceptance/Functional Checks)
Section III—Time Replacement Items
Section IV—Repair Restrictions

3.5.6.1 *Title page and list of effective pages*. These shall be prepared in accordance with the requirements of MIL-M-38784.

3.5.6.2 *Table of contents*. The Table of Contents shall be prepared in the appropriate format as shown in figure 1 and in accordance with the requirements of MIL-M-38784.

3.5.6.3 *Introduction*. The introduction shall contain the statements shown in figure 2. Additional information applicable to a specific equipment or system, or any modifications to the introduction shown in figure 2, shall require prior approval of the procuring activity.

3.5.6.4 *Section I, Scheduled Inspection, Servicing and Lubrication Requirements*. This section shall contain all inspection, servicing and lubrication requirements that must be accomplished at specified intervals by the users of the equipment. To identify the various intervals, this section shall be divided by alphabetical parts. The most frequent requirement, such as daily, shall be Part A and then

Source: https://assist.dla.mil -- Downloaded: 202640-21T15:26Z
Check the source to verify that this is the current version before use.

progress to the next higher order of inspection or interval, such as 7 day, which will become Part B. Because of varying requirements for each system or equipment, as each higher level is reached, a new alpha identifier will be assigned. Typical parts of Section I are as follows:

a. *Section I, Part A—Daily Inspection (see figure 3).*

(1) Items that, due to environment or operating characteristics, are subject to rapid deterioration.

(2) Items that, due to design characteristics, require daily inspection service or verification of service and lubrication.

b. *Section I, Part B, C, etc—Calendar/Phased Inspection (See figures 4, 5, 7, 8).* These parts shall include those requirements to be accomplished at a specified interval or multiples of the specified interval, i.e., 7 day, 14 day, 21 day, etc, and shall consist primarily of requirements that are necessary at more extended intervals, and in certain instances more searching in scope, than the daily inspection. It shall primarily include requirements that fall in the following categories:

(1) Items that are subject to developing defects after periods of operation in excess of the daily inspection inverval and may require disassembly to ascertain wear or deterioration that may cause failure of the unit.

(2) Items that require periodic removal for bench check to determine functional reliability, extent of physical wear, and evidence of failure.

(3) Items of a critical nature that are subject to developing defects which are not readily apparent to the operator.

(4) Items that due to design characteristics require calendar inspection, servicing or verification of service or lubrication.

3.5.6.4.1 Figures 3, 4 and 5 shall be used for the layout and format for Section I, Part A, B, etc, when both a manual and work card set are prepared.

3.5.6.4.2 Figures 6, 7 and 8 shall be used for the layout and format for Section I, Part A, B, etc, when only a manual is prepared

3.5.6.5 *Section II, Special Inspection and Maintenance Requirements.* The special inspection and maintenance requirements shall include those functions to be accomplished at the expiration of a specified number of equipment hours of operation, lapse of calendar time, after the occurrence of a specific or unusual condition or incident, after extensive modifications or inspections and when accepting equipment to determine item or weapon serviceability. It shall include the following typical parts:

a. *Section II, Part A—Conditional Inspection, or Inspections After a Specific Occurrence.* (See figure 9) Items that due to their physical/structural characteristics are subject to fatigue/deterioration from calendar time or environmental conditions shall be covered.

b. *Section II, Part B—Acceptance Inspection.* (See figure 10) Those conditions which require a functional check to verify maintenance performed on equipment or operational conditions shall be listed. It shall include requirements that fall in the following typical conditions:

(1) After a periodic or specific numbered phased inspection has been completed.

(2) After applicable inspection has been completed when equipment is removed from extended storage or relocated to another operating location.

(3) After major components have been replaced or removed for repairs and reinstalled.

(4) After a major structural modification or repair is accomplished.

(5) After extensive maintenance or repair is accomplished of such a scope that a test is determined to be necessary by the maintenance officer.

c. *Section II, Part C—Depot Level Inspection or Inspect and Repair As Necessary (IRAN).* (See figure 11) Those depot level or IRAN inspections to be accomplished on a scheduled or calendar time cycle basis shall be included. The complexity of these tasks requires special skills, tools and equipment that are not normally available at the using organization.

3.5.6.6 *Section III, Time Replacement Items.* (See figure 12) This section shall include those items and components that must be removed and changed for new or overhauled like items at the expiration of a specified number of operating hours, expiration of a number of cycles, and interval of calendar time. This section shall include only those items that are readily identifiable for record purposes, and that fall in the following categories:

a. Items whose failure due to location or function within a system could compromise safety of equipment or personnel beyond reasonable limits and acceptable risk.

b. Items whose failure due to location or function within a system would definitely cause an equipment failure.

c. Items whose cost is high and whose failure might cause damage beyond economical repair.

3.5.6.7 *Section IV—Repair Restrictions.* See figure 13 for format.

a. *Section IV, Part A—Base Level Repair Restrictions.* This part shall contain a listing of items by work unit code and noun, for which there are cer-

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:26Z
Check the source to verify that this is the current version before use.

tain restrictions on authorized base level repair. The section describes the type of repairs that are not authorized for base level. Items listed shall be limited to recoverable type items. Listing of part numbers will be required only when preferred items and the substitutes have different repair restrictions.

(1) Item selection shall consider all the logistic costs involved in providing specialized technical skills, including cost of tools and test equipment, especially where the predicted frequency (rate) of failure generation is such that establishmen: of a repair capability at base level is not economically sound.

(2) Repair limitations shall be stated in a manner to positively identify the repair restriction within the limitation statement without any requirement for field activities to relate the text of the introduction with the statements of the restrictions. As an example, statements such as "No Repair" and "No Repairs Requiring Disassembly" shall not be used. To permit the intent of the above statements to stand completely on their own content, the terms "No Repair Authorized" and "Repair Requiring Disassembly Not Authorized" shall be used. Repair restrictions will always be worded in the form of limitations. Statements reflecting repair authorizations will not be used as a substitute for repair restrictions to reduce the amount of coverage required.

(3) Reference to repair technical orders is permissible but shall be kept to a minimum. The reference should contain the applicable sections that prescribe the repairs authorized. Preference is to extract repair limitations from the applicable repair technical orders and present them in a condensed form in Section IV, Part A. Where it is impractical to condense repair limitations into a brief but concise statement of repair restrictions, reference to a technical order and its applicable section is permitted.

b. *Section IV, Part B—Restrictions For Contingency Operations.* This part supplements Section IV, Part A by listing additional items of equipment by work unit code and noun for which repair restrictions are established for contingency operations.

3.6 *Work cards.* The work cards shall contain the scheduled inspection, servicing and lubrication requirements, shall be arranged according to inspection interval, and listed in a logical order of accomplishment (figures 18 and 19). When an inspection requirements manual is prepared, the inspection,servicing and lubrication requirements shall be extracted from Section I of that manual and prepared in work card form under the provisions and format requirements of this specification. When an inspection requirements manual is not prepared, inspection, servicing and lubrication requirements shall be determined under the provisions of 3.1 through 3.4.4.4 of this specification and prepared in work card format accordingly.

3.6.1 *Operational performance checks/tests.* When specified by the procuring activity, scheduled operational performance checks/tests included in the work cards shall be augmented by step-by-step maintenance performance procedures as specified under the provisions of 3.2 and 3.2.1 and conform to the format illustrated in figure 20.

3.6.2 *Special Inspection, Time Replacement Items and Base Level Repair Restrictions.* When an inspection requirements manual is not prepared, the inspection work cards shall contain special, time replacement, and base level restrictions and will be developed under the provisions of 3.5.6.5, 3.5.6.6 and 3.5.6.7 and conform to the format illustrated in figures 23, 24 and 25 respectively.

3.6.3 *Preparation.* Printing and binding of inspection work cards shall be accomplished in accordance with MIL-M-4410 with a finished size of 8 × 4 inches. Printing of the work cards shall be accomplished back to back, head to foot. Inspection work cards shall be drilled to fit the pocket size binders.

3.6.3.1 Reproducible copy shall be prepared in the format of figures 18 through 25 for both mechanized and non-mechanized methods; that is, the face and the back of a card shall be prepared on one sheet. If the back of a card is to be blank, the bottom half of the sheet shall be blank. When the reproducible copy (or negatives) are sent to the printer, it will be the Government's responsibility to inform the printer that the top half of the sheet is the face of the card.

3.6.4 *Contents.* Where inspection requirements are sufficient in scope to warrant application of the phased inspection concept, two sets of work cards shall be prepared. One set shall be composed of daily requirements and the other shall contain the phased requirement. At the option of the procuring activity, the requirement for separate sets of work cards may be waived. When the phased concept is not applied, one set of work cards shall be prepared to include the daily and periodic inspection requirements.

3.6.5 *Type of work cards.* The procuring activity shall specify the type of work cards to be prepared consistent with the maintenance concept desired by the using command. Work cards sets shall reflect one of the following formats:

a. *Scheduled periodic inspection work cards.* (Inspection work cards that do not contain work areas, mechanic types, mechanic numbers or minutes.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

b. *Planned inspection work cards.* (Work cards prepared to reflect the specialized maintenance concept by use of work areas, mechanic types and mechanic numbers.)

c. *Phased inspection work cards.* (Same as planned work cards except a pre-determined maintenance cycle is used.)

3.6.6. *Arrangement.* The work card set shall be arranged in one of the following sequences as specified by the procuring activity:

Scheduled Periodic	*Planned*	*Phased*
Title Card	Title Card	Title Card
List of Effective Cards	List of Effective Cards	List of Effective Cards
Table of Contents	Table of Contents	Table of Contents
Introduction	Introduction	Introduction
	Work Area	Work Area
		Phased Inspection Schedule
Inspection Requirements	Inspection Requirements	Inspection Requirements
Service & Lube Requirements	Service & Lube Requirements	Service & Lube Requirements
*Special Inspections	*Special Inspections	*Special Inspections
*Time Replacement Items	*Time Replacement Items	*Time Replacement Items
*Repair Restrictions	*Repair Restrictions	*Repair Restrictions

*These requirements shall be included in the work cards when an inspection requirements manual is not prepared.

3.6.6.1 *Title card and list of effective cards.* These shall be the first cards of each separate work card set. MIL-M-4410 is applicable for preparation requirements. When preparing changes, the title card, with the appropriately completed list of effective cards, shall be the first cards of the set of changed cards.

3.6.6.2 *Table of contents.* The appropriate table of contents shall be used. See figure 14.

3.6.6.3 *Introduction.* The introduction card(s) shall contain the heading and text as shown in figure 15.

3.6.6.4 *Work area diagram.* If applicable, the Work Area Diagram (figure 16) shall be prepared to reflect the work area breakdown for each set or system required for each type of inspection. The work area diagram for each type of inspection for a particular set or system need not be the same since the scope of the inspection will determine the area breakdown required.

3.6.6.5 *Phased inspection schedule.* If applicable, a phased inspection schedule (figure 17) shall be prepared.

NOTE: All cards of a work card set are printed head to foot. Accordingly, the publication number and page numbers shown on the list of Effective Cards through the Phased Inspection Schedule (when applicable) shall be shown in the upper and lower right corner respectively, of all such cards. The Table of Contents through Phased Inspection Schedule cards shall be numbered with lower case Roman numerals. (Upper case acceptable for mechanized printout).

3.6.6.6 *Inspection, servicing and lubrication.* When an inspection requirements manual is prepared, the remainder of the work card set shall be composed of the inspection, servicing and lubrication requirements. When an inspection requirements manual is not prepared, work cards shall be prepared for special inspections, time replacement items and repair restrictions.

3.6.6.7 *Grouping.* Grouping of inspection work cards within a work card set shall be accomplished as follows:

a. *Daily inspection work card sets.* Daily inspection work card sets used with phased inspection work card sets shall be arranged so as to provide the inspection work cards first, followed by the servicing and lubrication work cards. When work areas and mechanic types are used in daily inspection work card sets, the inspection, servicing and lubrication work cards shall be further subdivided by work area/mechanic type; e.g.: work area 1, radio; work area 2, radio; work area 1, radar; work area 2, radar.

b. *Scheduled periodic work card sets.* When scheduled periodic work card sets are required which do not use work areas and mechanic types, the work cards shall be sectionalized to provide separate sections for inspection, servicing and lubrication information. Section I of a work card set shall contain the scheduled inspection requirements and shall be arranged according to intervals with the most frequent inspections appearing first and progressing in increments through the next most frequent intervals, e.g., daily, 7 day, 14 day, etc. Section II of a work card set shall contain the servicing and lubrication requirements and shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

be arranged according to the interval arrangement described for Section I.

c. *Planned inspection work card sets.* Planned inspection work card sets shall be arranged by work area, mechanic type and interval. The work card set shall be further subdivided into sections. Section I shall contain all scheduled inspection work cards; e.g., daily, 7 day, 14 day, etc, with each of these groups divided by work areas and the mechanic types as required for each work area. Section II shall contain all servicing and lubrication requirements and shall be grouped the same as Section I. For example:

Section I	*Section II*
Work Area 1	Work Area 1
Radio, Daily, 7-14 day	Radio, Daily, 7-14 day
Radar, Daily, 7-14 day	Radar, Daily, 7-14 day
Work Area 2	Work Area 2
Radio, Daily, 7-14 day	Radio, Daily, 7-14 day
Radar, Daily, 7-14 day	Radar, Daily, 7-14 day

d. *Phased inspection work card sets.* Phased inspection work card sets shall be arranged by work area, mechanic type and interval, as described for planned inspection work cards. Phased inspection work cards shall not be sectionalized except when an inspection requirements manual is not prepared. Each group of work cards; e.g., 7 day, 14 day, 21 day, etc, shall consist of inspection, servicing and lubrication work cards and shall be arranged in this order. When phased inspection work cards are sectionalized, they shall be sectionalized in accordance with 3.6.6

e. *Special inspections, time replacement items, repair restrictions.* When an inspection requirements manual is not prepared, sections shall be included in the work card sets to cover special inspections, time replacement items and repair restrictions (Refer to 3.5.6.5, 3.5.6.6 and 3.5.6.7). For scheduled periodic and planned inspection work card sets, these sections shall be identified as Section III, IV and V, respectively. For phased inspection work card sets, these sections shall be identified as Section II, III and IV, respectively.

3.6.6.8 *Treatment.* Each inspection requirement shall be treated individually and specifically. Work card requirements for planned and phased inspection work card sets shall be confined to requirements on a card that can be accomplished by one type mechanic or specialist within a specific work area or in a convenient combination of work areas. Work card requirements calling for coordinated effort shall be cross referenced on the cards involved.

3.6.6.9 *Sequence.* Requirements on each work card shall be sequenced in the order of accomplishment. Each line item shall be numbered beginning with number one and shall be continued on the back of the card as applicable.

3.6.6.10 *Power and service.* Application of "electrical power on" and "electrical power off" on the work cards in relation to "service in" and "service out" shall be accomplished as follows:

a. Work cards that require inspection of equipment while the equipment is in use shall be designated as "service in", "electrical power on". Work cards with each numbered inspection requirement statement shall be further identified in the work card body with the symbol "4" shown immediately preceding the inspection requirement item number.

b. Work cards that require inspection of equipment when service is interspersed and "electrical power on" is not required to accomplish the requirements contained therein shall be designated as "service out/electrical power off". Service out cards that require both "electrical power on/electrical power off" applications to accomplish a series of inspection requirements to achieve a specific sequence, or to retain continuity of inspection shall be designated as "electrical power on/off". Each "electrical power on" requirement shall be identified, with the symbol @ preceding the inspection requirement item number. See figure 19 for sample illustration of electrical power application.

3.6.6.11 *Lubrication.* The lubrication work cards shall show lubrication requirements for all parts requiring periodic lubrication. Cards shall cover systems, assemblies, or components logically grouped together to shown an easily understood and orderly presentation of lubrication requirements. Lubrication cards shall contain the appropriate lubrication requirement statements on the face of the card and the reverse side will contain the lubrication diagram. This diagram shall reflect the locations (numerically identified) requiring lubrication, the lubricants required for each location, and a symbol indicating the method of application (figures 21 and 26). Lubrication cards shall convey to their user the complete lubrication requirements without referring to supplemental material in the parent manual or other documents. However, it is permissible that all information of a general nature, such as keys, symbols, and explanatory notes be shown on a page preceding the diagram. The text of the diagram shall be brief and explicit, providing necessary and special instructions to be observed in the use of the diagram. Supplemental drawings, showing enlarged and detailed views, shall be used to identify otherwise obscured lubricated items.

3.6.6.12 *Lubricating symbols.* (See figure 26). A lubrication symbol shall consist of a North Atlantic

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

Treaty Organization (NATO) number (reference TO 42B1-1-15), an application symbol, as required, in that order from top to bottom, enclosed in a circle. Special note numbers may be included when necessary. The lubrication symbol shall have a leader line extending to the lubrication point on the diagram or drawing. Several leader lines may branch from the main leader to designate multiple lubrication points.

3.6.6.13 *Servicing.* Servicing work cards shall be prepared to cover all items that require scheduled service (figure 22).

3.6.7 *Work card entries.* Heading blocks shall be completed as follows:

3.6.7.1 *Inspection requirements.* An entry shall be made in this block to indicate the work card requirement interval and type of inspection; i.e., daily inspection, 7 day inspection, 7 day servicing, 7 day lubrication, phased inspection, special inspection, time replacement items, and repair restrictions.

3.6.7.2 *Electrical power.* If it is mandatory that power be on during the accomplishment of the tasks listed on the card, ON shall be entered in this block. If it is mandatory that power be off during the accomplishment of the tasks listed on the card, OFF shall be entered in this block. When it is necessary to state power on and power off requirements on the same card, ON/OFF shall be entered in this block.

3.6.7.3 *Service.* If service is interrupted during accomplishment of the tasks listed on the card, "OUT" shall be entered in this block. If service is not interrupted, "IN" shall be entered in this block. When accomplishment of the tasks result in an in service and out of service condition, IN/OUT shall be entered in this block.

3.6.7.4 *Card numbering.* When work card sets are not sectionalized, the work cards shall be numbered consecutively. When reproducible copy is prepared by a mechanized method a three digit number, i.e. 001 through 999 shall be used. When work cards sets are sectionalized, a prefix number shall be shown preceding the work card number signifying the work card section: i.e. 1-1, etc, or 1-001 through 1-999; 2-1, etc, or 2-001 through 2-999; 3-1, etc, or 3-001 through 3-999. The back of a work card shall show the same work card number as shown on the front of a work card.

3.6.7.5 *Work area(s).* This block shall list the work area or areas in which the requirements listed on the card will be performed. The work area numbers are obtained from the work area diagram. When more than one work area is involved, the work area numbers shall be listed in the order in which the areas will be occupied. Use of this block is optional and will be specified by the procuring activity and the using command.

3.6.7.6 *Type mechanic required.* This entry shall identify the type mechanic, inspector, or specialist required to accomplish the inspection requirements listed on the card. Use of this block is optional at the discretion of the procuring activity and the using command.

3.6.7.7 *Mechanic number.* This entry shall identify the recommended quantity of specialists required to accomplish the work outlined on the work card. Use of this block is optional at the discretion of the procuring activity.

3.6.7.8 *Card time.* This entry shall indicate the elapsed time in man minutes needed to accomplish the work prescribed by the card.

3.6.7.9 *Publication number.* The publication number assigned by the procuring activity shall be entered in the publication number block.

3.6.7.10 *Man minutes column.* Entries shall be made in this column to indicate the minutes required for each individual inspection item. On inspection work cards which contain a series of short time items (one minute or less), a horizontal dash may be placed on the line for the first and last items of the group and the time may be made as a single entry midway between the two horizontal dashes. Use of this column is optional at the discretion of the procuring activity.

3.6.7.11 *Work area column.* Entries shall be made in this column to denote the work area in which each individual item or items on the card will be accomplished. Use of this column is optional at the discretion of the procuring activity.

3.6.7.12 *Work unit (code) (WUC) system column.* Entries shall be made in this column to denote the system WUC number for each item. (These are obtained from Work Unit Code Manuals.)

3.6.7.13 *Work unit (code) (WUC) subsystem column.* Entries shall be made in this column to denote the WUC subsystem and component number for each item. This may be to the 3rd, 4th, or 5th digit. (These are obtained from Work Unit Code Manuals.)

4. QUALITY ASSURANCE PROVISIONS

4.1 Quality assurance provisions shall be in accordance with MIL-M-38784 and MIL-P-38790.

5. PREPARATION FOR DELIVERY.

5.1 Packaging, packing and marking for shipment shall be in accordance with MIL-M-38784 and MIL-P-38790.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 *Intended use.* Technical data prepared to this specification is intended for use by Air Force organizational, intermediate and depot level maintenance activities for performing preventive maintenance on related ground C-E-M equipment.

6.2. *Additional information.* Additional information relative to Air Force inspection systems, policies, and procedures may be obtained from the 00-20 series technical orders.

6.3 *Coordination.* The procuring activity after coordination with the using command(s) shall specify the publication(s) required. Normally an Inspection Requirements Manual and work card set shall be developed for each ground C-E-M set. Waiver of the requirement for either the work cards or the Inspection Requirements Manual shall require concurrence of the using command. In the event that two or more commands use the same equipment and one command desires step-by-step inspection procedures and the other command does not require this type format, the command having the larger inventory of the equipment shall determine the format. The contract shall reflect the procuring activity's decision.

6.4 *Definitions.*

6.4.1 *Accessibility.* A measure of the relative ease of admission to the various areas of an item.

6.4.2 *Application symbol.* A conventional sign, such as a character, letter, or an abbreviation, used instead of a word or words to identify a type of lubrication (See figure 26).

6.4.3 *Assemblies.* A number of components or subassemblies, or any combination thereof, joined together to perform a specific function.

6.4.4 *Component (unit).* A group of parts, or subassemblies, electrically or mechanically connected to perform a specific function

Examples: Radio Receiver, Radio Transmitter, Sonar Transducer, Modulator.

6.4.5 *Daily inspection.* An inspection which is accomplished each calendar day. Some sets or systems may require this inspection to be repeated prior to certain missions. In this event, such inspections will be listed in the manual under Section II, Special Inspection Requirements, referencing appropriate work cards. The inspection consists of checking the equipment by performing visual examination and will include those requirements that will assure the equipment is ready for operation or operating properly. It includes primarily those requirements that are subject to damage by outside forces such as maintenance crews. It includes items that require servicing or need for verification of servicing, such as fuel, lubricants, hydraulic systems.

6.4.6 *Damage.* A condition caused by an abnormal force or object and which requires corrective action.

6.4.7 *End item.* An entity of C-E-M equipment which is not to be installed in another piece of equipment. For supporting equipment, it will be that configuration of equipment not installed in, nor physically attached to, another piece of equipment to the extent that it loses its end item identity.

6.4.8 *Evidence.* Proof of a suspected or existing unsatisfactory condition.

6.4.9 *Functional system.* Those units which make up a system without regard to whether the units are hydraulic, electrical, pneumatic, electronic, or mechanical in nature. The components which comprise a functional system are those components which contribute to the actual function or activation of the system.

6.4.10 *Inspect and repair as necessary (IRAN) inspection.* Depot level modification/maintenance of ground C-E-M equipment/facilities normally scheduled on a calendar time cyclic basis. (See TO 00-25-108.)

6.4.11 *Phased inspection.* A concept which is a consolidation of the basic inspection (7 day inspection) and other periodic inspection requirements into small packages having approximately the same work content and involving approximately the same number of clock hours. The objective of the phased inspection concept is to reduce the length of time that a set or system is out-of-commission for any given scheduled inspection. The repackaging of the total workload requirements into balanced workload segments eliminates extended out-of-commission periods for any given inspection and permits accomplishment of the inspection during periods when a set or system is not scheduled for operation. This eliminates extended out-of-commission periods for any given inspection, increases operational and maintenance scheduling flexibility and assures the availability of more equipment for operational commitments. The number of phased packages is established by dividing the lowest inspection interval into a selected maintenance cycle. As an example, if the lowest inspection interval is 7 days and the maintenance cycle selected is 182 days, there would be 26 phased packages (182 ÷ 7 = 26). Inspection requirements falling due at 7, 14, 21, 28 days, etc, would be spread among the 26 phased packages.

(1) The phased inspection concept will not be applied for any type, set, or system for which a

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

reasonably equal distribution of the total workload requirements cannot be achieved. It also will not be normally applied if the length of time required to perform a given task or related tasks exceeds the time required to perform all the other inspection requirements. These factors, with due consideration to operational mission requirements, will be the determining factors as to whether the phased inspection concept will be applied for a particular type, set, or system.

(2) Applicability of the phased inspection concept will be denoted by the issuance of phased inspection work cards. The number of phased packages will vary for each different set, or system, and will depend on the inspection requirements involved, man-hours required to perform any given package, and the requirements for preparation and pre-positioning of equipment needed to accomplish each phased package. Through the application of this concept, a portion of the total recurring inspection requirements is accomplished at each phase and the cycle will be repeated after completion of the last package.

6.4.12 *Planned inspection.* A method of performing specific preventive maintenance inspection requirements on a scheduled basis of predetermining the numbers and skills of maintenance personnel required to accomplish the predictable portion of the inspection. Its primary purpose is the efficient use of maintenance personnel to accomplish work card maintenance on a time schedule basis through the application of work areas and mechanic types or specialists required.

6.4.13 *Preventive maintenance.* That maintenance performed to retain an item in satisfactory condition. It is accomplished by systematic inspection and care, which detects and prevents failures, and corrects minor deficiencies.

6.4.14 *Scheduled periodic inspection.* Inspection requirements which must be accomplished to assure the satisfactory physical and operational condition of the ground C-E-M equipment. This inspection contains the basic requirements. Additional information from the Special Inspections and Time Replacement Items may be necessary to complete the inspection. For example, if a 168 day periodic inspection is to be accomplished, the 84 day periodic inspection requirements will be included.

6.4.15 *Service in.* Inspections that can be performed while the equipment is in operation.

6.4.16 *Service out.* Inspections that can only be performed with equipment turned off.

6.4.17 *Servicing.* The maintenance required to restore longevity to fluids and pneumatic systems, batteries, coolant and pressure supply systems.

6.4.18 *Set.* A grouping of items having the same basic name for use in connection with, or for performance of closely related operations; or a number of groups, units or a combination thereof, not all having the same basic name, which are required for the performance of an operational function. This may exclude certain operating units supplied separately or already present at the point of usage. In some cases, a set may be a single major unit capable of performing an operational function.

6.4.19 *Site.* A physical location of ground C-E-M equipment or facilities such as: station, base, depot, AMA, field, fort, launching area, camp, installation or arsenal. AFM 300-4, Volume I, Part Five, contains the installation and location code for sites.

6.4.20 *Special inspections.* Inspections necessitated by specific circumstances or upon occurrence of specific conditions or events. These inspections supplement other inspections, i.e., daily, periodic, etc. This may also include those requirements having a prescribed interval or frequency which does not coincide with the scheduled periodic inspections.

6.4.21 *Storage inspection.* Inspection which contains the requirements for items in ready storage under cognizance of intermediate and organizational maintenance personnel. Such items may either be in an installed or uninstalled configuration.

6.4.22 *Support system.* A system composed of techniques, skills and equipment, the composite of which is not an instrument of combat but which is in support of a weapon system, an operational role or mission, e.g., training systems, instrument landing system, major communications system, etc.

6.4.23 *Supporting equipment.* All equipment required to install, launch, arrest, guide, control, direct, inspect, test, adjust, appraise, gage, measure, assemble, disassemble, handle, transport, safeguard, store, actuate, service, repair, overhaul, maintain, or operate the system, subsystem, end item, or component. This comprises special tools and test devices, including measurement standards required for support of items of supporting equipment.

6.4.24 *Work area.* An item of equipment, groups or components of a set or system, or a site location where the inspection requirement will be performed.

6.4.25 *Work unit code.* The code used to identify ground C-E-M equipment system by system, subsystem and component breakout, consisting of a combination of five alpha-numeric characters.

6.5 *Ordering data.* Procurement documents should specify:

a. Title, number, and date of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

b. Whether indirect support equipment shall be included (3.1.4).

c. Whether augmenting subparagraphs are required (3.3).

d. Whether separate manuals are required (3.5).

e. Whether augmenting step-by-step procedures are required (3.6.1).

f. Whether separate sets of cards are not required (3.6.4).

g. The type of work cards required (3.6.5).

h. The work card arrangement (3.6.6.).

i. Whether the Work Area block is to be utilized (3.6.7.5).

j. Whether the Type Mechanic block is to be utilized (3.6.7.6).

k. Whether the Mechanic Number block is to be utilized (3.6.7.7).

l. Whether the Man Minutes column is to be utilized (3.6.7.10).

m. Whether the Work Area column is to be utilized (3.6.7.11).

CUSTODIAN:
Air Force—16

PREPARING ACTIVITY:
Air Force—16

Air Force—01, 10, 13

Project TMSS-F315

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS

Section	Part	Title	Page
		INTRODUCTION	III
I		SCHEDULED INSPECTION, SERVICING AND LUBRICATION REQUIREMENTS	
	A	Daily Inspection	1-A-001
	B	7 Day Inspection	1-B-001
	C	14 Day Inspection	1-C-001
	D	21 Day Inspection	1-D-001
	E	28 Day Inspection	1-E-001
	F	42 Day Inspection	1-F-001
	G	56 Day Inspection	1-G-001
	H	84 Day Inspection	1-H-001
	I	168 Day Inspection	1-I-001
	J	364 Day Inspection	1-J-001
II		SPECIAL INSPECTION AND MAINTENANCE REQUIREMENTS	
	A	Conditional Inspection, or Inspection After a Specific Occurrence	2-A-001
	B	Acceptance Inspection	2-B-001
	C	Depot Level Inspection or Inspect and Repair as Necessary (IRAN)	2-C-001
III		TIME REPLACEMENT ITEMS	
	A	Time Change	3-A-001
IV		REPAIR RESTRICTIONS	
	A	Repair Restrictions	4-A-001
	B	Restrictions for Contingency Operations	4-B-001

Figure 1. Sample Table of Contents for a Scheduled Periodic/Planned Inspection. (Sheet 1 of 2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS

Section	*Part*	*Title*	*Page*
		INTRODUCTION	III
I		SCHEDULED INSPECTION, SERVICING AND LUBRICATION REQUIREMENTS	
	A	Daily Inspection	1-A-001
	B	Phased Inspection	1-B-001
II		SPECIAL INSPECTION AND MAINTENANCE REQUIREMENTS	
	A	Conditional Inspection, or Inspections After a Specific Occurrence	2-A-001
	B	Depot Level Inspection, or Inspect and Repair as Necessary (IRAN)	2-B-001
III		TIME REPLACEMENT ITEMS	
	A	Time Change	3-A-001
IV		REPAIR RESTRICTIONS	
	A	Base Level Repair Restrictions	4-A-001

Figure 1. Sample Table of Contents for a Phased Inspection. (Sheet 2 of 2)

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:26Z
Check the source to verify that this is the current version before use.

INTRODUCTION

1. This manual contains complete requirements for accomplishing scheduled maintenance on this C-E-M equipment during its entire service life. It establishes inspection, accessory replacement, depot level, or inspect and repair as necessary (IRAN), and base level repair requirements and restrictions. The requirements prescribed by this manual are primarily those which are technical in nature and the conditions listed are intended to direct attention to known problem areas where defects or malfunctions would prevent the items from performing their designed functions within prescribed limits. These requirements are developed for new C-E-M equipment through maintenance engineering and comparison of similar installations, or in-service C-E-M equipment, by continually evaluating the performance of the equipment, results of scheduled maintenance, and through study of factual operating data for the primary use of the C-E-M equipment. The interval between the accomplishment of a requirement is intended to be the longest period of time that an item or component can safely operate without an inspection or observation. When the C-E-M equipment is operated in other than the primary purpose, or major use class, the necessary requirements have been adjusted accordingly, and the requirements identified as to class of operation. These requirements and inspection intervals are the maximum and should never by exceeded. Local conditions (type of missions, special utilization, geographical locations, etc) may dictate more frequent inspection or replacement or more thorough inspections. Therefore, commands, local commanders, and their maintenance officers have the prerogative to increase the frequency of scope of any requirements, and are expected to exercise this prerogative.

2. This manual may pertain to part, or all types and series, of a model of C-E-M equipment and may, therefore, contain requirements applicable to specific equipment that is not installed on individual C-E-M equipment. When this situation is encountered, those requirements that are not applicable should be disregarded.

3. The inspections prescribed by this manual will be accomplished at specified periods by Air Force organizational activities with assistance provided by Air Force intermediate maintenance activities and specialized repair activities, when required. Compliance with the provisions of this manual is required to assure that latent defects are discovered and corrected before malfunctioning or serious trouble results.

4. The inspection requirements are stated in such a manner as to establish what equipment is to be inspected, when it is to be inspected, and what conditions are to be sought. In scope, the requirements are designed to direct the attention of maintenance personnel to components and areas where defects may exist as a result of usage under normal operating conditions. They are not intended to provide coverage for routine cleaning, washing, etc, nor are they designed to lead to the detection of isolated discrepancies that may occur on a one time basis, or discrepancies that are the result of carelessness, abuse or poor maintenance practices. During accomplishment of the specific requirements directed by this manual, maintenance personnel should observe both the equipment being inspected and the components in the surrounding area for defects or irregularities not within the scope of the requirements. Requirements requiring the use of electrical power for accomplishment are identified by a commercial "at" (@) symbol preceding the paragraph number for the requirements.

5. The replacement schedule directs replacement of items at a specific time whose failure would compromise safety or operation beyond reasonable limits or definitely cause a mission failure. Also considered are any high cost items whose failure would result in condemnation and any short life items which would require frequent occurrence of unscheduled maintenance. Items not listed will be known as "condition items" and will be replaced only when necessary.

6. Section IV, Base Level Repair Restrictions, lists items (by work unit code, nomenclature, FSC and part number) for which base level repair restrictions have been established, and describes the repairs which are not authorized.

Figure 2. Sample Introduction (Sheet 1 of 2)

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:26Z
Check the source to verify that this is the current version before use.

7. The times in man-minutes for accomplishment of requirements in Sections I and II reflect only the time required for inspection or replacements. These times do not include time required to gain access to the equipment to facilitate accomplishment. Those factors (personnel and equipment shortages, lack of parts, adverse working conditions, and qualifications of personnel) which will directly affect the length of time for any scheduled maintenance are not included because they cannot be accurately predicted. Because the computer is limited to showing minutes at 999, when this figure is exceeded the additional minutes will be shown below the 999; thus 1500 will be shown as 999 followed by 501; 2000 will be shown as 999, 999, 002.

8. This manual does not contain detailed instructions for troubleshooting to find causes for malfunctioning, nor does it contain instructions for repair, adjustment, or other means of rectifying defective conditions. Proper installation of a piece of equipment or accessory is not necessarily within the scope of this manual as adequacy and completeness of installation will have been determined at the time of installation. Applicable portions of the appropriate maintenance manual should be consulted to obtain "how to" maintenance instructions as they are beyond the scope of this manual.

9. For the purpose of clarification of terms used in this manual, the following definitions are given:
   a. Specified—Refers to a definite amount, operation, or limitation which has been established and is contained in applicable directives.
   b. Evidence—Is proof of a suspected or existing unsatisfactory condition.
   c. Secure—Means the component is properly mounted or attached to related equipment, including applicable safetying.
   d. Accessible—Is the term applied to equipment that may be inspected without further disassembly or removal of covers, closures, panels, etc, other than those required to accomplish the more specific requirements applicable to the particular inspections.

10. Changes and revisions to this manual will be published when necessary to add, delete, or change frequency or scope of requirements. Such changes will be based on factual data accumulated as a result of maintenance experience with the equipment. Recommendations proposing changes to this manual should be submitted on AFTO Form 22 in accordance with TO 00-5-1 to the using command headquarters.

Figure 2. Sample Introduction (Sheet 2 of 2)

Source: https://assist.dla.mil -- Downloaded: 202640-21T15:26Z
Check the source to verify that this is the currentversion before use.

SECTION I

SCHEDULED INSPECTION REQUIREMENTS

PART A

DAILY INSPECTION

1. The maintenance officer will establish an appropriate schedule to assure the daily inspection is accomplished once each 24 hours. The inspection consists of checking the equipment by performing visual examination and will include requirements to assure the equipment is ready for operation, and no defect or maladjustment exists that could cause accidents or mission failure.

2. All the requirements listed herein are identical to those contained in the corresponding inspection work cards. The format provides a cross reference to the work card and paragraph number where the inspection is shown. Therefore, paragraph numbers will not appear in consecutive sequence. Subparagraphs of work cards will not appear in this section.

DAILY INSPECTION

Work Unit Code	*Work Card No.*	*Paragraph*		*Minutes*	*Work Area*	*Mech Code*
BCAOO	005	●1	Receiver-Transmitter, OA-3607, for specified power output check. (Reference TO 31P4-2UPX14-2)	010	2	A
BCAOO	005	●2	Receiver-Transmitter, OA-3607, for minimum discernible signal check. (Reference TO 31P4-2UPX14-2)	010	2	A
BCAAO	006	●3	Receiver, for normal gate time control (GTC) level check. (Reference TO 31P4-2UPX14-2)	015	2	A

1-A-001

Figure 3. Sample Section I, Part A, Daily Inspection of Requirements (Scheduled Periodic/Planned/Phased) Inspection Manual

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:26Z
Check the source to verify that this is the current version before use.

SECTION I

SCHEDULED INSPECTION REQUIREMENTS

PART E

28 DAY INSPECTION

1. The maintenance officer will establish an appropriate schedule to assure this inspection is accomplished every 28 days. The inspection consists of checking the equipment by performing visual examination and will include requirements to assure the equipment is ready for operation, and no defect or maladjustment exists that could cause accidents or mission failure.
2. All the requirements listed herein are identical to those contained in the corresponding inspection work cards. The format provides a cross reference to the work card and paragraph number where the inspection is performed. Therefore, paragraph numbers will not appear in consecutive sequence. Subparagraphs of work cards will not appear in this section.

28 DAY INSPECTION

Work Unit Code	*Work Card No.*	*Paragraph*		*Minutes*	*Work Area*	*Mech Code*
BCALO	010	●3	Receiver cabinet motors for strong air-flow with no indication of excessive noise.	005	2	A
BCCOO	010	1	Receiver-Transmitter for cleanliness	010	2	A
BCCOO	010	2	Receiver-Transmitter cabinet blower filter for cleanliness. (Reference TO 31P4-2UPX14-2 for cleaning procedure)	005	2	A

1-E-001

Figure 4. Sample Section I, Part E, 28 Day Inspection Requirements of (Scheduled Periodic/Planned) Inspection Manual

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:26Z
Check the source to verify that this is the current version before use.

SECTION I

SCHEDULED INSPECTION REQUIREMENTS

PART B

PHASED INSPECTIONS

1. These inspections will be accomplished at the specified interval or at multiples of the specified interval. It will consist of requirements that are necessary at more extended intervals than the daily inspection and in certain instances more searching than in the daily inspection. The accomplishment of this inspection should determine that no conditions remain uncorrected which could result in failure of a component or system malfunction prior to the next scheduled inspection.
2. The phased inspections will be broken out into 26 equal time periods of 7 day intervals. (Two complete cycles per annum.)
3. All the requirements listed herein are identical to those contained in the corresponding inspection work cards. The format provides a cross reference to the work card and paragraph number where the inspection is performed. Therefore, paragraph numbers will not appear in consecutive sequence.

PHASED INSPECTIONS

Work Unit Code	*Work Card No.*	*Paragraph*	*Antenna (System AA000)*	*Minutes*	*Work Area*	*Mech Code*
			7 DAY INSPECTIONS			
AA000	1	1	Bull gear for excessive or abnormal wear; (See Card 2 for wear patterns).	030	61	A
AADLC	1	3	Main gear reducers for leaks and correct oil level.	030	61	A
AADYA	1	2	Bearing lube stand, UD921, magnetic filter for cleanliness.	030	52	A
			14 DAY INSPECTIONS			
AADYA	22	1	Bearing lube stand, UD921, for oil sample analysis. (Forward AFTO Form 119B and sample to SMAMA, Attn: SMNQL)	015	52	A
			28 DAY INSPECTIONS			
AADJO	31A	1	Gear reducer hold-down bolts for specified torque. (200 ft lbs).	090	61	A
AADJO	31A	2	Vertical drive coupling bolts for specified torque (250 ft lbs).	090	61	A
			84 DAY INSPECTIONS			
AADLK	57	1	1hp lube pump motors for proper clearance between copper bar and brush housing (.25 inch minimum)	120	61	A
			168 DAY INSPECTIONS			
AADVB	87	1	Slip rings, UD885, for continuity between terminal and ring.	005	57	A

1-B-001

Figure 5. Sample Section I, Part B, Phased Inspection Requirements of Inspection Manual

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:26Z
Check the source to verify that this is the currentversion before use.

SECTION I

SCHEDULED INSPECTION REQUIREMENTS

PART A

DAILY INSPECTION

The maintenance officer will establish an appropriate schedule to assure the daily inspection is accomplished once each 24 hours. The inspection consists of checking the equipment by performing visual examination and will include requirements to assure the equipment is ready for operation, and no defect or maladjustment exists that could cause accidents or mission failure.

DAILY INSPECTION

Work Unit Code	*Service*	*Paragraph*		*Minutes*	*Work Area*	*Mech Type*
BCAOO	In	@1	Receiver-Transmitter, OA-3607, for specified power output. Minimum of 1.5KW in low power operation. (Reference TO 31P4-2UPX14-2)	010	2	Radar
BCAOO	In	@2	Receiver-Transmitter, OA-3607, for minimum discernable signal (MDS). Minimum of 106.0 DBV required. (Reference TO 31P4-2UPX14-2)	010	2	Radar

1A-1

Figure 6. Sample Section I, Part A, Daily Inspection Requirements of (Scheduled Periodic/Planned/Phased) Inspection Manual

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:26Z
Check the source to verify that this is the current version before use.

SECTION I

SCHEDULED INSPECTION REQUIREMENTS

PART E

28 DAY INSPECTION

The maintenance officer will establish an appropriate schedule to assure the inspection is accomplished every 28 days. The inspection consists of checking the equipment by performing visual examination and will include requirements to assure the equipment is ready for operation, and no defect or maladjustment exists that could cause accidents or mission failure.

28 DAY INSPECTION

Work Unit Code	*Service*	*Paragraph*		*Minutes*	*Work Area*	*Mech Type*
BCCOO	Out	1	Receiver-Transmitter for cleanliness.	010	2	Radar
BCCOO	Out	2	Receiver-Transmitter cabinet blower filter for cleanliness. (Reference TO 31P4-2UPX14-2 for cleaning procedure)	005	2	Radar
BCALO	Out	3	Receiver cabinet blower motors for strong airflow with no indication of excessive noise.	005	2	Radar

Figure 7. Sample Section I, Part E, 28 Day Inspection Requirements of (Scheduled Periodic/Planned) Inspection Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

SECTION I

SCHEDULED INSPECTION REQUIREMENTS

PART B

PHASED INSPECTIONS

1. These inspections will be accomplished at the specified interval or at multiples of the specified interval. It will consist of requirements that are necessary at more extended intervals than the daily inspection and in certain instances more searching than in the daily inspection. The accomplishment of this inspection should determine that no conditions remain uncorrected which could result in failure of a component or system malfunction prior to the next scheduled inspection.
2. The phased inspections will be broken out into 26 equal time periods of 7 day intervals. (Two complete cycles per annum.)

PHASED INSPECTIONS

Work Unit Code	*Service*	*Paragraph*	*Antenna (System AA000)*	*Minutes*	*Work Area*	*Mech Code*
			7 DAY INSPECTIONS			
AAOOO	In	1	Bull gear for excessive or abnormal wear	030	61	A
AADLC	In	2	Main gear reducers for leaks and correct oil level	030	61	A
AADYA	In	3	Bearing lube stand, UD921, magnetic filter for cleanliness	030	52	A
			14 DAY INSPECTIONS			
AADYA	In	1	Bearing lube stand, UD921, for oil sample analysis. (Forward AFTO Form 119B and sample to SMAMA, Attn: SMNQL)	015	52	A
			28 DAY INSPECTIONS			
AADJO	In	1	Gear reducer hold-down bolts for specified torque. (200 ft lbs).	090	61	A
AADJO	In	2	Vertical drive coupling bolts for specified torque (250 ft lbs).	090	61	A
			84 DAY INSPECTIONS			
AADLK	Out	1	1 hp lube pump motors for proper clearance between cooper bar and brush housing (.25 inch minimum)	120	61	A
			168 DAY INSPECTIONS			
AADVB	In	1	Slip rings, UD885, for continuity between terminal and ring.	005	57	A 1-B-001

Figure 8. Sample Section I, Part B, Phased Inspection Requirements of Inspection Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

SECTION II

SPECIAL INSPECTION REQUIREMENTS

PART A

CONDITIONAL INSPECTION, OR INSPECTIONS AFTER A SPECIFIC OCCURRENCE

This part contains requirements to be accomplished at the expiration of a specified number of equipment hours of operation, lapsed calendar time or after the occurrence of a specific or unusual condition or incident. The inspection will be added to and accomplished at the next inspection. However, a requirement which represents a heavy workload and involves multiple installations may be accomplished in appropriate segments at consecutive inspections. The conditional requirements, when due, may require accomplishment as soon as possible after the occurrence of the condition or prior to further operation.

SPECIAL INSPECTIONS

Work Unit Code	*Paragraph*		*Minutes*
AAOOO	1	Whenever icing conditions have been encountered that restricted antenna operational limits or resulted in excessive loads (200A) to antenna drive motors, inspect: a. Antenna for cracks and distortion. b. Antenna drive motors for evidence of overheating.	120
AKOOO	2	Whenever power amplifier (PA) tube is removed or every 12 months, whichever occurs first, disassemble and inspect the following: a. Lower grid assembly for accumulation of dirt, corrosion, and evidence of overheating. b. Output loading assembly for accumulation of dirt, corrosion, bent loops, and evidence of overheating.	*999 351
AXDOO	3	Every 12 months, inspect sagen hoist assembly as follows: a. Hoist cables for broken or frayed strands and evidence of wear: clamps for corrosion and loose connections: wire rope sheaves and moving parts for proper lubrication (Use standard 30 weight, non-detergent oil).	060

*When time exceeds 999 minutes, it may be shown in this manner since the computer limit is 999; for non-mechanized method 1350 would be inserted.

2-A-001

Figure 9. Sample Section II, Part A, Special Inspection Requirements of (Scheduled Periodic/Planned/Phased) Inspection Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

SECTION II

SPECIAL INSPECTION REQUIREMENTS

PART B

ACCEPTANCE INSPECTION

This section contains the conditions which require verification of maintenance performed by the accomplishment of a functional check and the inspection requirements that are to be accomplished to make the verification. The inspection requirements are those considered necessary to assure that the equipment is capable of accomplishing its mission. When a functional check is accomplished for verification of maintenance performed on a specific equipment or system, those inspection requirements not related to that specific equipment or systems should be disregarded.

CONDITIONS REQUIRING FUNCTIONAL CHECK

1. After a periodic or specific numbered phased inspection has been completed.
2. After applicable inspection has been completed when equipment is removed from extended storage or relocated to another operating location.
3. After major components have been replaced or removed for repair and reinstalled.
4. After a major structural modification or repair is accomplished.
5. After extensive maintenance or repair is accomplished of such a scope that a test is determined to be necessary by the maintenance officer.

2-B-001

Figure 10. Sample Section II, Part B, Acceptance Inspection Requirements of (Scheduled Periodic/Planned/Phased) Inspection Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

SECTION II

SPECIAL INSPECTION REQUIREMENTS

PART C

DEPOT LEVEL INSPECTION OR INSPECT AND REPAIR AS NECESSARY (IRAN)

This part contains inspection and maintenance requirements which, due to their complexity, skill, tools, equipment, or facilities required, will be accomplished during depot level work (IRAN).

SPECIAL INSPECTIONS

Work Unit Code	*Para-Graph*		*Min-utes*
AAOOO	1	AN/FPS-24 Antenna and structure for complete corrosion treatment and refinish (zinc shield application).	*999 441
AAAOO	2	AN/FPS-24 Antenna drive gear train for evidence of excessive wear and backlash. (Reference TO 31P6-2FPS24-2 for gear wear pattern and backlash limits).	999 *999 402

*When time exceeds 999 minutes, it may be shown in this manner since the computer limit is 999; for non-mechanized method 1440 and 2400 respectively would be inserted.

2-C-001

Figure 11. Sample Section II, Part C, Depot Level/IRAN Inspection and Maintenance Requirements of (Scheduled Periodic/Planned/Phased) Inspection Manual.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:26Z
Check the source to verify that this is the current version before use.

SECTION III

TIME REPLACEMENT ITEMS

This section lists units of equipment that are to be replaced upon the accrual of a specific number of equipment hours of operation or a lapse of calendar time. Replacement means removal of the item and installation of a serviceable item in its place. The hourly and calendar requirements, when due, will be added to and be accomplished at the daily or periodic inspection, whichever is more appropriate. The conditional requirements, when due, may require accomplishment as soon as possible after the occurence of the condition or prior to further operation.

REPLACEMENT SCHEDULE

Work Unit Code	*Paragraph*		*Minutes*
AADLJ	1	Every 9000 hours, replace: a. Pump, rotary P/N 1015754	030
AACMO	2	Every 3000 hours replace: a. Pump assy, centrifugal, P/N 1034962	120
AKEDO	3	Every 18 months replace: a. Pump assy, centrifugal, P/N 775588	120
AKEBO	4	Whenever overheat condition has occurred and metal particles are found in pressure filter, replace: a. Intake pump assy, P/N 102908	240

Figure 12. Sample Section III, Replacement Schedule Items of (Scheduled Periodic/Planned/ Phased) Inspection Manual.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

SECTION IV
REPAIR RESTRICTIONS

PART A

1. This section lists those items (by work unit code and noun) for which base level repair is authorized but contain some restrictions on the type of repair to be performed. All other repairs required to return the item to a serviceable condition will be accomplished at base level consistent with the authorizations for repair level contained in the appropriate illustrated parts breakdown manual.

2. The repair restrictions contained in this section will be reviewed periodically by utilizing AFM 66-1 data and other maintenance and supply information to determine whether base level repair authorizations can be extended.

3. For AFM 66-1 maintenance data reporting purpose, NRTS Code 1 (Repair not Authorized) will be used only when repairs required to make the item serviceable include one or more of the conditions listed in this section for that particular item.

REPAIR RESTRICTIONS

Work Unit Code	*Paragraph*	
AAACO	1	Dipole Assembly: a. Repair beyond corrosion treatment not authorized
AAAHO	2	Frequency divider: a. Repair beyond corrosion treatment and replacement of external attaching parts not authorized.
AKDBA	3	Gage, pressure: a. Repair not authorized.
AKDDA	4	Fan, Centrifugal: a. Repair beyond brush replacement not authorized.

4-A-001

Figure 13. Sample Section IV, Part A, Repair Restrictions of (Scheduled Periodic/Planned/ Phased) Inspection Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

SCHEDULED PERIODIC/PLANNED

TO 31P6-2FPS35-6WC-1

TABLE OF CONTENTS

Section		*Page*
	Introduction	III
	Work Area Diagrams	IV
I	Inspection Requirements	1-001
II	Servicing and Lubrication Requirements	2-001

PHASED

TO 31P6-2FPS35-6WC-1PH

TABLE OF CONTENTS

Section		*Page*
	Introduction	III
	Work Area Diagrams	IV
	Phased Inspection Schedule	VII
I	Inspection, Servicing and Lubrication Requirements	1-001

Figure 14. Sample Table of Contents Work Cards

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:26Z
Check the source to verify that this is the current version before use.

TO 31P6-2FPS35-6WC-1PH

INTRODUCTION

These inspection work cards provide the requirements for inspection/lubrication and will be used as a guide in performing the inspection to insure that no item is overlooked. The card size affords convenient handling by maintenance personnel while performing an inspection. Work assignment information is provided at the bottom of each card to permit establishment of a convenient filing system for the set of cards and in making work assignments to maintenance personnel. [To afford more efficient maintenance planning and assignment of work, the requirements are arranged by work areas utilizing separate cards for requirements to be accomplished during a specific inspection frequency.]

[The inspection requirements on each card are arranged to provide a logical sequence of performance of the requirements pertaining to the area or areas to which the card applies.] Detailed instructions for the use of these cards and the description and application of other forms and charts to be used in conjunction with these cards are contained in 00-20 series technical orders.

Changes and revisions to these work cards will be published when necessary to add, delete, revise, or change requirements. Such changes and revisions will be based on factual data as a result of experience with equipment. Data will be gathered through AFM 66-1 data, field evaluation, unsatisfactory reports, and other factual failure data.

NOTE: Sentences inclosed in brackets [ ] shall be omitted when the work card set does not require work areas.

Figure 15. Sample Introduction to Phased Inspection Work Card Set (Sheet 1 of 2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.


INTRODUCTION (Cont'd)

ATTENTION

Recommended changes to this set of work cards shall be submitted on AFTO Form 22, thru command headquarters in accordance with TO 00-5-1. Requirements requiring the use of electrical power for accomplishment are identified by a commercial "at" (@) symbol preceding the paragraph number for the requirement.

Figure 15. Sample Introduction to Phased Inspection Work Card Set (Sheet 2 of 2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

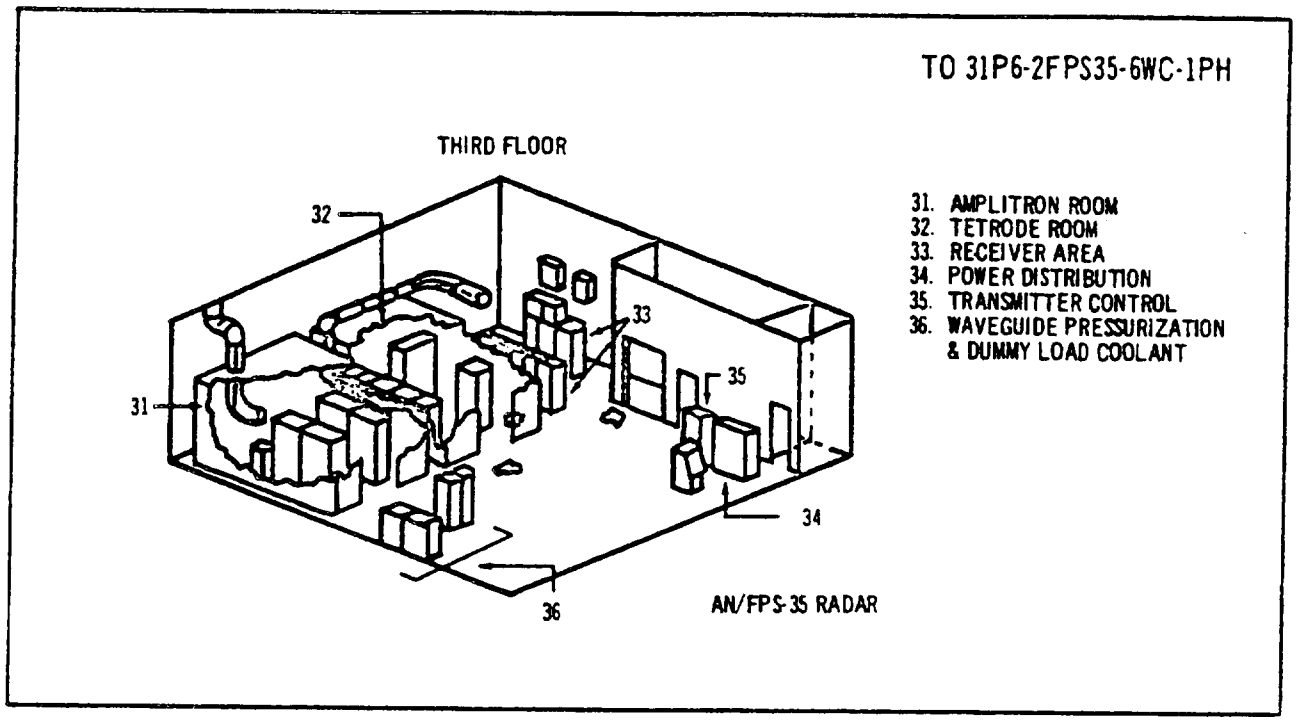

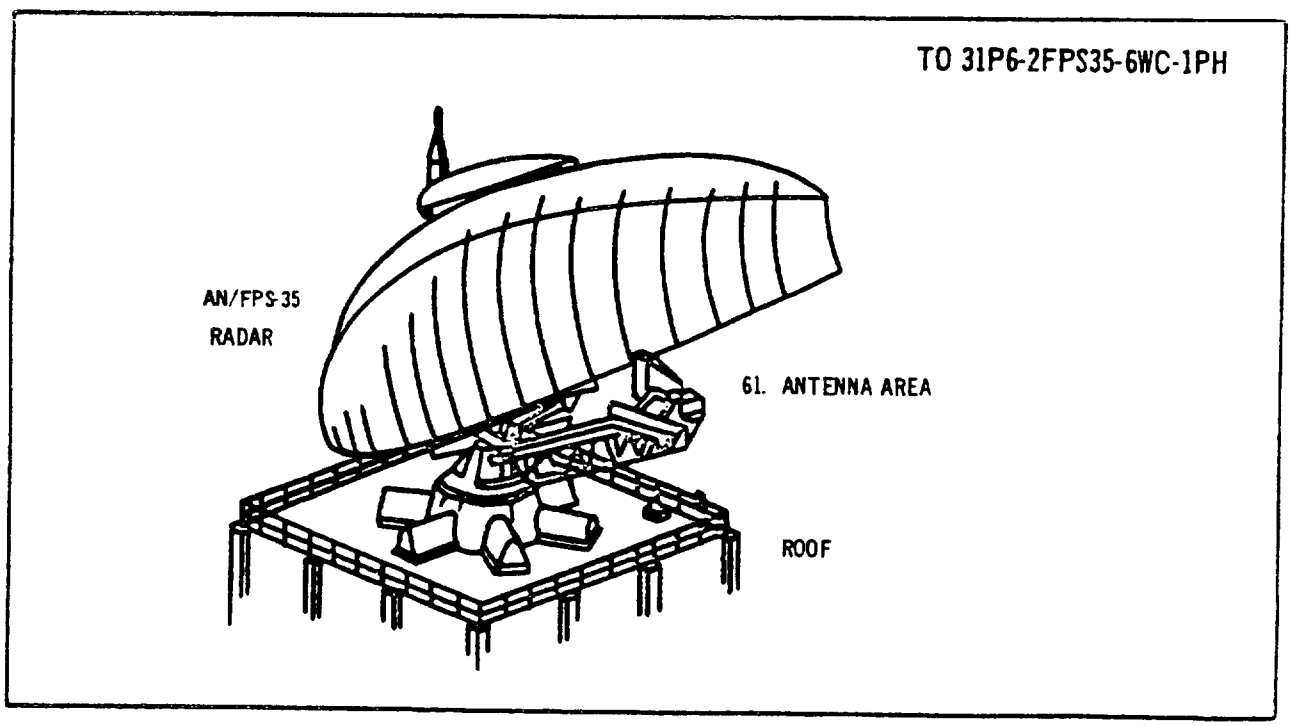


Figure 16. Sample Work Area Diagram Work Card

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

TO 31P6-2FPS35-6WC

PHASED INSPECTION SCHEDULE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9
10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13
14	14	14	14	14	14	14	14	14	14	14	14	14	14	14	14	14	[illegible]	14	14	14	14	14	14	14
15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15
20	17	20	17	20	17	20	17	20	17	20	17	20	17	20	17	20	17	20	17	20	17	20	17	20
22	21	22	21	22	21	22	21	22	21	22	21	22	21	22	21	22	21	22	21	22	21	22	21	22
25	26	29	23	25	23	28	23	25	23	28	23	25	23	29	23	25	23	28	23	25	23	28	23	25
27	33	30	24	27	26	29	24	27	26	29	24	27	26	30	24	27	26	29	24	27	26	29	24	27
63	64	44	31A	74	33	30	31A	73	33	30	31A	63	33	44	31A		33	30	31A		33	30	31A	
			40		78		40			84	40	71	64		40				40				40	
			41				41				41	72			41				41				41	
			66				80				42	57			66				85				42	
			69												69				87				91	
			89												97				88				96	
			90																					

NOTE: 91 Do on first cycle only
96 Do on second cycle only
97 Do on first cycle only


Figure 17. Sample Phased Inspection Schedule Work Card

Source: https://assist.dla.mil -- Downloaded: 20260-21T15:26Z
Check the source to verify that this is the current version before use.

MAN MIN	WORK AREA	WORK UNIT SYS	WORK UNIT SUB SYS	(Phased) 28 Day Inspection — INSPECTION REQUIREMENTS	ELECTRICAL POWER: OFF	SERVICE: OUT	CARD NO: 009
				Receiver System			
020	1	AP	000	1. Receiver air-filters for cleanliness.			
005	1	AP	000	2. Receiver cabinet electrical ground connections for tightness and continuity.			
005	1	AP	000	3. Receiver cabinet cable connections for corrosion (external).			
005	1	AP	000	4. Receiver amplifier for evidence of overheating.			
010	1	AP	BTC	5. Blower motor, lubricate (2 places) until new grease appears.			

CARD NO	WORK AREA(S)	TYPE MECH ROR	MECH NO	CARD TIME	PUBLICATION NUMBER
009	1	RADAR		0045	TO 31P3-2FPS6-6WC-1PH

TO 31P3-2FPS6-6WC-1PH — CARD NO. 009

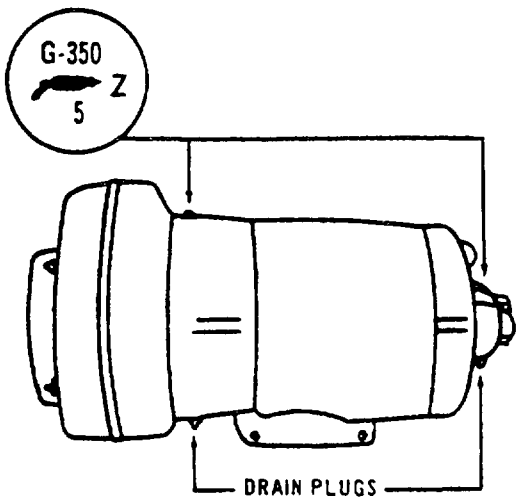

Blower Motor Lubrication

SYMBOL	SPECIFICATION	TYPE OF LUBRICANT
G-350	MIL-G-3278	GREASE, GEN PURPOSE

Figure 18. Sample Phased Inspection and Lubrication Points Work Card

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

MAN MIN	WORK AREA	WORK UNIT SYS	WORK UNIT SUB SYS	Daily Inspection — INSPECTION REQUIREMENTS	ELECTRICAL POWER	SERVICE	CARD NO
					ON	IN	005
				AN/UPX-14			
010	2	BC	A00	@1. Receiver-transmitter, OA-3607, for specified power output check. (Reference TO 31P4-UPX14-2)			
				A. Minimum 1.5 KW required in low power operation.			
010	2	BC	A00	@2. Receiver-transmitter, OA-3607, for minimum discernible signal check. (Reference TO 31P4- "PX14-2).			
				A. Minimum of 106.0 DBV required.			

CARD NO	WORK AREA(S)	TYPE MECH ROR	MECH NO.	CARD TIME	PUBLICATION NUMBER
005	2	RADAR		0020	TO 31P4-2UPX14-6WC-1

MAN MIN	WORK AREA	WORK UNIT SYS	WORK UNIT SUB-SYS	28 Day Inspection — INSPECTION REQUIREMENTS	ELECTRICAL POWER	SERVICE	CARD NO
					ON/OFF	OUT	010
				AN/UPX-14			
005	2	BC	000	1. Receiver-transmitter cabinet blower filter for cleanliness. (Reference TO 31P4-2UPX14-2 for cleaning procedure).			
005	2	BC	AL0	@2. Receiver cabinet blower motor for strong airflow, with no indication of excessive noise.			

CARD NO	WORK AREA(S)	TYPE MECH ROR	MECH NO.	CARD TIME	PUBLICATION NUMBER
010	2	RADAR		0010	TO 31P4-2UPX14-6WC-1

Figure 19. Sample Daily and 28 Day Inspection Work Card

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:26Z
Check the source to verify that this is the current version before use.

MAN MIN	WORK AREA	WORK UNIT SYS	WORK UNIT SUB-SYS	14 Day Inspection — INSPECTION REQUIREMENTS	ELECTRICAL POWER	SERVICE	CARD NO
					ON	IN	1-001
015	11	AA	EA0	@1. Receiver-transmitter, RT-441, for voltage measure checkout.			

A. Microphone M-29A/U and special purpose cable assy CX-6186(U) are required to accomplish this check.

B. Turn the R-T unit on, set meter switch to line V. Meter should indicate in the normal range.

C. Select a preset channel with meter switch set to line V. Meter should indicate midscale +/-20 percent.

D. Continue on preset channel and set meter switch to low B+ then to high B-. Each meter reading should indicate midscale +/-20 percent.

E. Set squelch control to off, meter switch to S-meter. Meter should indicate zero when no signal is present.

CARD NO	WORK AREA(S)	TYPE MECH ROR	MECH NO	CARD TIME	PUBLICATION NUMBER
1-001	11	RADIO	1	0015	TO 31R2-2GRA-116WC-1

MAN MIN	WORK AREA	WORK UNIT SYS	WORK UNIT SUB-SYS	14 Day Inspection — INSPECTION REQUIREMENTS	ELECTRICAL POWER	SERVICE	CARD NO
					ON	IN	1-001

F. Connect microphone M-29A/U to adapter cable CX-6186/U and connect cable to J-703 on R-T unit.

NOTE: Antenna must be connected to receiver-transmitter antenna connector. AN/GRA-53A/54A chained connector at broad band jack must be connected if jack is not otherwise used.

G. Set meter switch to % mod and speak into microphone. Meter should indicate midscale +/-20 percent.

H. Set meter switch to DVR IB. Meter should indicate midscale +/-20 percent.

I. Set meter switch to FRE. Meter should indicate midscale +/-20 percent.

(Cont'd on next card)
TO 31R2-2GRA-116WC-1


Figure 20. Sample Inspection Work Card That Contains Maintenance Performance Procedures (Optional)

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:26Z
Check the source to verify that this is the current version before use.

MAN MIN	WORK AREA	WORK UNIT SYS	WORK UNIT SUB-SYS	28 Day Lubrication	INSPECTION REQUIREMENTS	ELECTRICAL POWER	SERVICE	CARD NO
						OFF	OUT	2-001
015	3	AA	G00	1. Amplidyne generator bearings: Apply grease until lubricant appears through dust seal. (2 places)				

CARD NO	WORK AREA(S)	TYPE MECH ROR	MECH NO	CARD TIME	PUBLICATION NUMBER
2-001	3	RADAR		0015	TO 31P3-2FPS6-6WC-1

TO 31P3-2FPS6-6WC-1 CARD 2-001

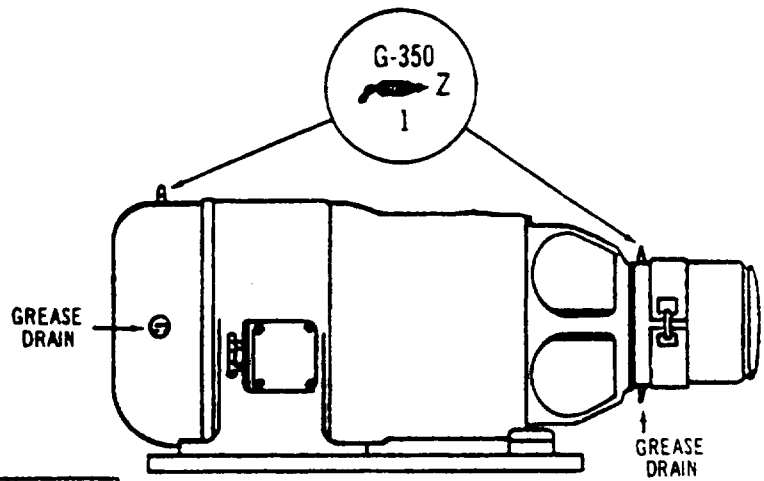

SYMBOL	SPECIFICATION	TYPE OF LUBRICANT
G-350	MIL-G-3278	GREASE, GEN. PURPOSE

Amplidyne Generator, Lubrication Points

Figure 21. Sample Lubrication Requirement (Narrative) and Lubrication Points Work Card

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

MAN MIN	WORK AREA	WORK UNIT SYS	WORK UNIT SUB-SYS	14 Day Servicing — INSPECTION REQUIREMENTS	ELECTRICAL POWER	SERVICE	CARD NO
					OFF	OUT	2-010
005	2	AA	AA0	1. Antenna reservoir for proper fluid level (fill with fluid, Spec MIL-H-5605 to top of filler port).			
010	2	AA	AC0	2. Receiver dehydrator dessicant replaced.			
030	2	AA	AB0	3. Power supply coolant filter removed and replaced.			
010	2	AA	AD0	4. Battery for proper electrolyte level. (Use distilled water: Do not overfill).			

CARD NO	WORK AREA(S)	TYPE MECH ROR	MECH NO	CARD TIME	PUBLICATION NUMBER
2-101	2	RADAR		0055	TO 31P4-2UPS14-6WC-1

MAN MIN	WORK AREA	WORK UNIT SYS	WORK UNIT SUB-SYS	INSPECTION REQUIREMENTS	ELECTRICAL POWER	SERVICE	CARD NO
				NOTE: Bottom half of sheet shall be blank when back of card is to be blank.			

Figure 22. Sample Servicing Work Card

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

MAN MIN	WORK AREA	WORK UNIT SYS	WORK UNIT SUB-SYS	Special Inspection — INSPECTION REQUIREMENTS	ELECTRICAL POWER	SERVICE	CARD NO
					OFF	OUT	3-001
120	1	AA	000	1. Whenever icing conditions have been encountered that restricted antenna operational limits or resulted in excessive loads (200A) to antenna drive motors, inspect: A. Antenna for cracks and distortion. B. Antenna drive motors for evidence of overheating.			
1350	1	AK	000	2. Whenever power amplifier (PA) tube is removed or every 12 months, whichever occurs first, disassemble and inspect the following: A. Lower grid assembly for accumulation of dirt, corrosion, and evidence of overheating. B. Output loading assembly for accumulation of dirt, corrosion, bent loops, and evidence of overheating.			

CARD NO	WORK AREA(S)	TYPE MECH ROR	MECH NO	CARD TIME	PUBLICATION NUMBER
3-001	1	RADAR		1530	TO 31P6-2FPS24-6WC-1

MAN MIN	WORK AREA	WORK UNIT SYS	WORK UNIT SUB-SYS	Special Inspection — INSPECTION REQUIREMENTS	ELECTRICAL POWER	SERVICE	CARD NO
					OFF	OUT	3-001
060	1	AX	D00	3. Every 12 months, inspect sagen hoist assembly as follows: A. Hoist cables for broken or frayed strands and evidence or wear, clamps for corrosion and loose connections: Wire rope sheaves and moving parts for proper lubrication (use standard 30 weight, non-detergent oil). TO 31P6-2FPS24-6WC-1			

Figure 23. Sample Special Inspection Work Card

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

MAN MIN	WORK AREA	WORK UNIT SYS	WORK UNIT SUBSYS	Time Replacement Items	INSPECTION REQUIREMENTS	ELECTRICAL POWER	SERVICE	CARD NO
						OFF	OUT	4-001
030	3	AA	DLJ	1. Every 9000 hours, replace:				
				A. Pump, rotary P/N 1017574				
120	3	AA	CMO	2. Every 3000 hours replace:				
				A. Pump assy, centrifugal P/N 1034962				
120	3	AK	EDO	3. Every 18 months, replace:				
				A. Pump assy, centrifugal P/N 775588				

CARD NO	WORK AREA(S)	TYPE MECH ROR	MECH NO	CARD TIME	PUBLICATION NUMBER
4-001	3	RADAR		0270	TO 31P6-2FPS35-6WC-1

MAN MIN	WORK AREA	WORK UNIT SYS	WORK UNIT SUBSYS	INSPECTION REQUIREMENTS	ELECTRICAL POWER	SERVICE	CARD NO.

NOTE: Bottom half of sheet shall be blank when back of card is to be blank.

Figure 24. Sample Time Replacement Items Work Card

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

MAN MIN	WORK AREA	WORK UNIT SYS	WORK UNIT SUB SYS	Repair Restrictions	INSPECTION REQUIREMENTS	ELECTR.CAL POWER ON	SERVICE IN	CARD NO 5-001
	1	AA	AC0	1. Dipole assembly A. Repair beyond corrosion treatment not authorized.				
	1	AA	AH0	2. Frequency divider A. Repair beyond corrosion treatment and replacement of external attaching parts not authorized.				

CARD NO	WORK AREA(S)	TYPE MECH ROR	MECH NO.	CARD TIME	PUBLICATION NUMBER
5-001	1	RADAR			TO 31P6-2FPS35-6WC-1

MAN MIN	WORK AREA	WORK UNIT SYS	WORK UNIT SUB-SYS	INSPECTION REQUIREMENTS	ELECTRICAL POWER	SERVICE	CARD NO
				NOTE: Bottom half of sheet shall be blank when back of card is to be blank.			

Figure 25. Sample Repair Restriction Work Card

Source: https://assist.dla.mil -- Downloaded: 202640-21T15:26Z
Check the source to verify that this is the current version before use.

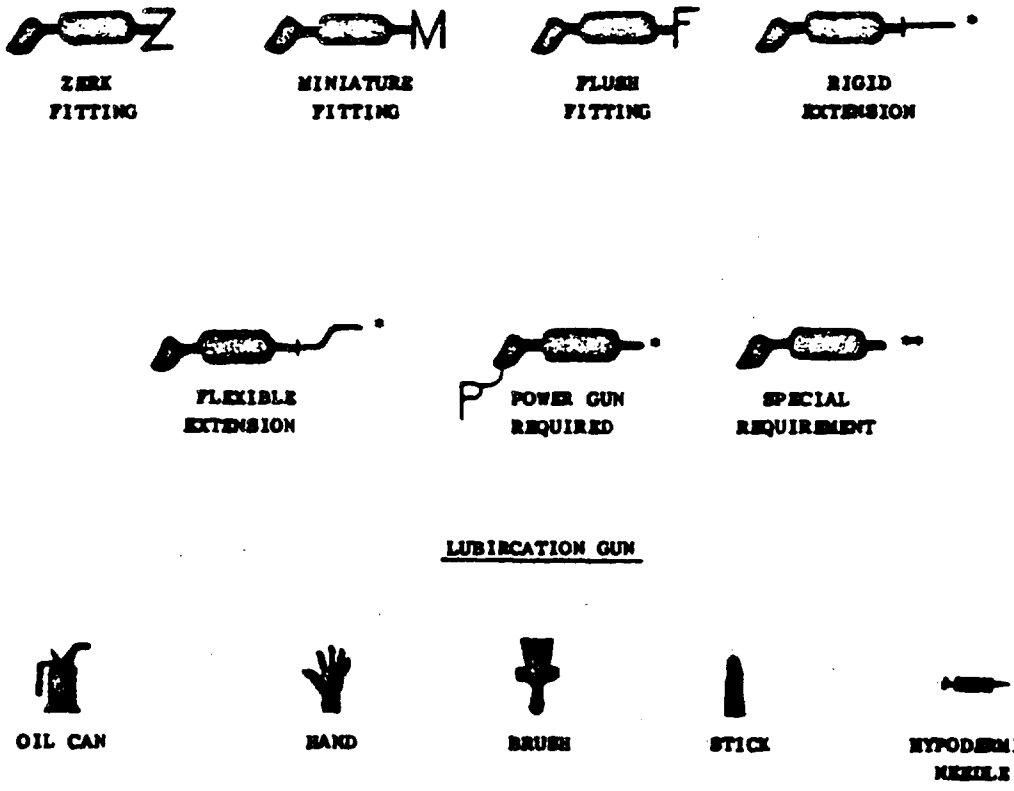


Figure 26. Application Method Symbols

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:26Z
Check the source to verify that this is the current version before use.

ALPHABETICAL INDEX

Paragraph No.

A

Abbreviations 3.4.1
Accessibility 6.4.1
Applicable documents 2
Application symbol 6.4.2
Arrangement 3.5.6; 3.6.6

B

Basis for inspection 3.5.2

C

Card numbering 3.6.7.4
Card time 3.6.7.8
Component (Unit) 6.4.4
Contents 3.6.4
Coordination 6.3

D

Daily inspection 6.4.5
Damage 6.4.6
Definitions 6.4

E

Electrical power 3.6.7.2
End item 6.4.7
Evidence 6.4.8
Exclusions 3.5.3
Extent of coverage 3.5.1

F

Functional system 6.4.9

G

General 3.1
Grouping work cards 3.6.6.7

H

I

Indirect support equipment 3.1.4
Inspect and repair as necessary inspection 6.4.10
Inspection frequency 3.5.4
Inspection requirements 3.6.7.1
Intended use 6.1
Introduction 3.5.6.3

J

K

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:26Z
Check the source to verify that this is the current version before use.

ALPHABETICAL INDEX (Cont'd.)

Paragraph No.

L

Lubrication 3.15; 3.6.6.11
Lubrication symbols 3.6.6.12

M

Manuals 3.1.2; 3.5
Man minutes column 3.6.7.10
Mechanic number 3.6.7.7

N

Notes, cautions and warnings 3.4.3

O

Ordering data 6.5
Operational performance check/tests 3.3; 3.6.1

P

Page numbering 3.5.5
Phased inspection 6.4.11
Phased inspection schedule 3.6.6.5
Planned inspection 6.4.12
Preparation 3.4
Preparation for delivery 5
Preventive maintenance 6.4.13
Power and service 3.6.6.10
Publication number 3.6.7.9

Q

Quality assurance 4

R

Recommendations and determinations 3.2
Reproducible copy 3.6.3.1

S

Scope 1
Scheduled periodic inspection 6.4.14
Section 3.5.6.4
Security classification 3.4.2
Sequence 3.6.6.9
Service 3.6.7.3
Servicing 3.6.6.13; 6.4.17
Service in 6.4.15
Service out 6.4.16
Set 6.4.18
Site 6.4.19
Special inspections 3.6.2; 6.4.20
Stating requirements 3.4.4
Storage inspection 6.4.21
Subparagraph 3.3.1
Support system 6.4.22
Supporting equipment 6.4.23

Source: https://assist.dla.mil -- Downloaded: 202640-21T15:26Z
Check the source to verify that this is the current version before use.

ALPHABETICAL INDEX (Cont'd.)

Paragraph No.

T

Table of contents 3.5.6.2; 3.6.6.2
Title card and list of effective cards 3.6.6.1
Title page and list of effective pages 3.5.6.1
Treatment 3.6.6.8
Type mechanic required 3.6.7.6
Type of work cards 3.6.5

U

V

Visual inspection requirement 3.3.3

W

Work area(s) 3.6.7.5; 6.4.24
Work area column 3.6.7.11
Work area diagram 3.6.6.4
Work cards 3.1.3; 3.6
Work card entries 3.6.7
Work unit code 6.4.25
Work unit subsystem column 3.6.7.13
Work unit system column 3.6.7.12

X

Y

Z

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

(Fold along this line)

EPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

AFLC (MCNOMP)
Wright-Patterson AFB, Ohio 45433

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

Source: https://assist.dla.mil -- Downloaded: 202640-21T15:26Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Inc! Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil – Downloaded: 2026-10-21T15:20Z
Check the source to verify that this is the current version before use.