MILITARY SPECIFICATION
INDICATOR, TEMPERATURE, THERMOCOUPLE
EHU-38/A

This amendment forms a part of Military Specification MIL-I-83262/2(USAF) dated 25 May 1977.

PAGE 3

3.4k: Change "leak" to "lead".

3.4o: Change "175±5V" to "195±5V".

PAGE 4

3.7.2: Delete and substitute:

"3.7.2 Subdial pointer. The subdial pointer shall be as shown on figure 2. The minimum lighted length of the pointer shall be 0.187 inch. The lighting shall be in accordance with MIL-L-27160. The length of the pointer is the distance from the tip to the center of the pivot point. The pointer may be constructed in such a way as to have an overhang or a hub section which is black. This section shall not be considered part of the specified length of the pointer."


PAGE 6

Add Figure 2.

3.9.3: Second sentence: Change "835°C" to read "845°C".

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:44Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.

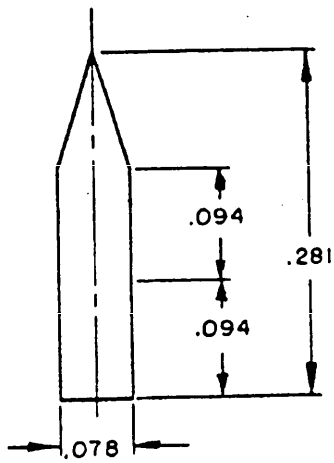

DIMENSIONS IN INCHES.
TOLERANCES: ±.016

FIGURE 2. Subdial pointer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.

PAGE 7

3.10: Delete "b. Sleeve bearings."

PAGE 9

4.1.4.9.1: Add: "This test shall be part of the individual tests of MIL-I-83262."

4.1.4.9.2: First sentence: Change "835°C" to read "845°C".

PAGE 10

TABLE IV: Last column: Change "835°C" to read "845°C".

Add:

"6.2 Ordering data. In addition to the ordering data specified by MIL-I-83262, the procurement documents should specify the output switch set point."

Custodian:
Air Force - 11

Reviewer activity:
Air Force - 99

Preparing activity:
Air Force - 11

(Project 6685-F600)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.