[INCH-POUND]
A-A-50581
June 12, 1997
SUPERSEDING
MIL-F-3268E
17 July 1992

COMMERCIAL ITEM DESCRIPTION

FITTINGS; PIPE, STEEL, SPECIAL (FOR TANKER UNLOADING INSTALLATIONS)

The General Services Administration has authorized the use of this commercial item description for all Federal agencies.

1. SCOPE. This commercial item description covers special fabricated steel pipe spool pieces and 90-degree elbows for use with submerged loading line installations in conjunction with tanker unloading operations of liquid fuels. The spool piece is used for hoisting and securing the hose which connects the submerged pipeline to the ship receiving or discharging fuel.

2. CLASSIFICATION. Fittings are of the following types and sizes (see 7.2):

Type A - Spool piece.
Type B - Spool piece and elbow.
Type C - Spool piece with tap-in.
Type D - Spool piece with tap-in and elbow.
Type E - Elbow.

Size 6 - 6-inch (150 millimetre (mm)) nominal pipe size (NPS).
Size 8 - 8-inch (200 mm) NPS.
Size 12 - 12-inch (300 mm) NPS.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Commanding Officer (Code 1581), Naval Construction Battalion Center, 1000 23rd Avenue, Port Hueneme, CA 93043-4301, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Design. The fittings covered by this commercial item description shall be fabricated as specified herein. Each fabricated fitting shall withstand an internal hydrostatic pressure of 350 pounds per square inch (psi) (2 413 kilopascal).

3.2 Standard commercial product. The fittings shall, as a minimum, be in accordance with the requirements of this commercial item description and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this commercial item description but which are a part of the manufacturers standard product, shall be included in the fittings being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.3 Fitting types.

3.3.1 Type A spool piece. The type A spool piece shall include a standard weight steel pipe, approximately 2 feet (0.608 metre) long, with a slip-on flange welded to each end. Two lifting ears of plate steel spaced 180 degrees apart, shall be welded longitudinally to the pipe body midway between the flange faces, and approximately in line with the midpoints between the pairs of bolt holes in each flange.

3.3.2 Type B spool piece and elbow. The type B spool piece and elbow shall include a welded neck flange, a standard weight, black steel, 90-degree long radius buttwelded elbow; a buttwelded lap-joint stud end; and a lap-joint loosely fitted to the stub end. A lifting ear of plate steel shall be welded longitudinally to the long radius of the 90-degree elbow in accordance with manufacturer's standard commercial practice.

3.3.3 Type C spool piece with tap-in. The type C spool piece with tap-in shall have two 1.25-inch (32 mm) outside diameter by 0.25-inch (6.35 mm) thick bosses, welded 5.5 inches (140 mm) from one end. The two bosses shall be spaced 180 degrees apart. A hole shall be drilled through the bosses and the pipe, and tapped with a 0.25-inch (6.35 mm) American Standard taper pipe thread (NPT). Fittings with 0.25-inch (6.35 mm) NPT threaded connections and contoured at the base may be used to provide threaded outlets in lieu of bosses, upon approval of the contracting officer. Each threaded outlet shall be fitted with a 0.25-inch (6.35 mm) steel plug.

3.3.4 Type D spool piece with tap-in and elbow. The type D spool piece with tap-in and elbow shall be in accordance with paragraphs 3.3.3 and 3.3.5.

3.3.5 Type E elbow. The type E elbow shall include a welded neck flange, a standard weight, black steel, 90-degree long radius buttwelded elbow; a buttwelded lap-joint stud end; and a lap-joint flange loosely fitted to the stub end. A lifting ear of plate steel shall be welded

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

longitudinally to the long radius of the 90-degree elbow in accordance with manufacturer's standard commercial practice.

3.3.6 Gaskets. Unless otherwise specified (see 7.2), gaskets shall be furnished for all flanges, except when spool piece (with or without tap-in) and elbow are required. When the spool piece and elbow are required and gaskets are to be furnished, one gasket for the elbow end, one gasket for the piece end, and one gasket between the mating ends of the spool piece and elbow shall be furnished. When the spool piece and elbow are required, and gaskets are not to be furnished, one gasket between the mating ends of the spool piece and elbow shall be furnished. The gaskets shall be pre-cut and shall have the following inside and outside diameters for the specified NPS (see table I):

TABLE I. Gasket size and tolerance.

NPS	Inside diameter (inches) (mm)	Outside diameter (inches) (mm)	Tolerance (inches) (mm)
6 (150 mm)	6 (154.1)	6.625 (168.3)	-0 +0.0625 (1.58)
8 (200 mm)	8 (202.7)	8.625 (219.1)	-0 +0.0625 (1.58)
12 (300 mm)	12 (304.0)	16.000 (406.4)	-0 +0.0625 (1.58)

3.4 Identification marking. The manufacturer's name, initials, or trademark shall be legibly cast or die-stamped on each fitting.

3.5 Cleaning, treatment, and painting. Exterior surfaces of fittings, except flange faces, shall be cleaned, treated, and painted in accordance with manufacturer's standard practice. Color of finish coat shall be as specified (see 7.2).

4. REGULATORY REQUIREMENTS.

4.1 Materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR). Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this commercial item description are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. Unless otherwise specified, none of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description.

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest version of ASTM E 380, and all other requirements of this commercial item description including form, fit, and function are met. If a product is manufactured to metric dimensions and these dimensions exceed the tolerances

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PACKAGING. The preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 Source of documents.

7.1.1 Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.

7.1.2. The Federal Acquisition Regulation (FAR) may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

7.1.3 ASTM Standards are available from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this CID.
b. Type and size of fitting required (see 2.).
c. When gaskets are required (see 3.3.6).
d. Color of finish coat (see 3.5).

7.3 Part Identification Number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor. The PINs to be used for items acquired to this description are created as follows:

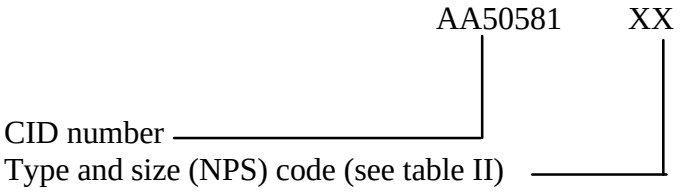

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

TABLE II. Code number to type and size.

Type of fitting	Size 6	Size 8	Size 12
Type A	01	02	03
Type B	04	05	06
Type C	07	08	09
Type D	10	11	12
Type E	13	14	15

7.4 Subject term (key word) listing.

Elbow
Gasket
Spool piece

MILITARY INTERESTS:

Custodians:
Navy - YD1
Air Force - 99

Review Activities:
Air Force - 82
DLA - CS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY
Navy - YD1

(Project 4730-0590)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** A-A-50581	**2. DOCUMENT DATE (YYMMDD)** 970612

3. DOCUMENT TITLE FITTINGS; PIPE, STEEL, SPECIAL (FOR TANKER UNLOADING INSTALLATIONS)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	**7. DATE SUBMITTED** (YYMMDD)

8. PREPARING ACTIVITY

a. NAME G. M. KRALIK	b. TELEPHONE *Include Area Code)* (1) Commercial (805) 982-5741 (2) AUTOVON 551-5471
c. ADDRESS *(Include Zip Code)* COMMANDING OFFICER, NCBC CODE 15E2R 1000 23RD AVENUE PORT HUENEME, CA 93043-4301	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** DEFENSE QUALITY AND STANDARDIZATION OFFICE 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22401-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.