15 May 1970
SUPERSEDING
MIL-C-1161C
8 July 1966

# MILITARY SPECIFICATION

## COLLAR, DOG, LEATHER

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 This specification covers the requirements for one type of leather dog collar.

## 2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

| | | |
|---|---|---|
| V-T-285 | - | Thread, Polyester |
| FF-R-556 | - | Rivet, Solid, Small; Rivet, Split, Small; Rivet, Tubular, Small; and Cap, Rivet; General Purpose |
| KK-L-201 | - | Leather, Cattlehide, Lace and Cut Laces |
| UU-P-268 | - | Paper, Kraft, Untreated, Wrapping |
| QQ-W-405 | - | Wire, Steel Carbon and Alloy (for Cold Heading and Cold Forging) |
| QQ-P-416 | - | Plating, Cadmium (Electrodeposited) |
| PPP-B-636 | - | Box, Fiberboard |
| PPP-F-320 | - | Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes |

FSC 3770

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:44Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attribute.
MIL-STD-129 - Marking for Shipment and Storage

DRAWING

ARMY NATICK LABORATORIES

2-4-62 - Collar, Dog, Leather; Assembly and Details

(Miniature copy of Drawing 2-4-62, identified as figure 1, is attached for information purposes only.)

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC.

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Attn: Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:44Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

* 3.1 Alternate components.- Components offered as equivalent to components specified herein and on the referenced drawings as a specific manufacturer's part or model number, or equal, shall be functionally equal to the manufacturer's part or model number identified, and shall be of equal or better quality. The incorporation and inclusion of such a component in the end product shall not require modification or change to any other specified component, and shall not reduce ease of maintenance to it or any other component, unless such change is specifically approved by the contracting officer. Prior to manufacture of the preproduction sample, or if none, the initial production unit, the supplier shall submit, for the contracting officer's approval, a list identifying each proposed alternate component, together with proof that each listed component complies with requirements above. The contracting officer, at his option, may require a physical sample of the proposed substitution. Approval of the submitted listing, together with necessary supporting data, authorizes commencement of manufacture of the preproduction sample or initial production unit, as applicable, but does not relieve the supplier of the responsibility that these components perform in accordance with specified requirements when incorporated into the end product.

3.2 Materials and components.-

* 3.2.1 Leather.- The leather shall be commercial, chrome-vegetable, retanned latigo, backs only, natural color. The chrome vegetable retanned latigo shall meet the elongation and breaking force requirments of KK-L-201, except elongation shall be measured under a load of 140 pounds and breaking force value shall be not less than 210 pounds. The width and thickness shall be as specified on Drawing 2-4-62.

3.2.2 Thread, polyester.- The thread for all stitching shall conform to type I or II, class 1, size No. 3 of V-T-285.

* 3.2.3 Gum, tragacanth.- Tragacanth gum for burnishing edges of leather shall be natural and conform to commercial grade No. 3.

* 3.2.4 Ring, dee.- The dee ring shall be steel wire, cadmium plated, size 1-1/4 inch, conforming to North and Judd Mfg. Co., No. 3250; Covert Mfg. Co., No. 3250, or equal.

* 3.2.5 Buckle, end bar.- The end bar buckle shall be steel wire, cadmium plated, size 1-1/4 inch conforming to North and Judd Mfg. Co., No. 999; Covert Mfg. Co., No. 999; or equal.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:44Z
Check the source to verify that this is the current version before use.

* 3.2.6 Rivets with caps.- Tubular rivets shall conform to type XII, class 3, grade E, 9/64 inch nominal diameter and caps shall conform to type II of FF-R-556, except that the rivets and caps shall be fabricated from low carbon, condition 3 steel, conformed to QQ-W-405. Rivets and caps shall be given a cadmium plated finish in accordance with class 2, type II of QQ-P-416. The length of the rivets shall be sufficient to allow full spread and anchorage within the cap.

3.3 Construction.- The construction shall conform to Drawing No. 2-4-62 and as specified herein.

3.3.1 Stitching, machine.- All stitching shall conform to type 301, 5 to 7 stitches per inch of FED-STD-751.

3.4 Marking.- The letters "U.S.", the manufacturer's name and the year of manufacture shall be indented in the size characters and in the location shown on Drawing 2-4-62.

3.5 Setting of rivets.- The cap and head shall be set tight against the leather surface and there shall be no exposed rivet ends. The shank of the tubular rivets shall be fully spread and anchored within the cap. Rivets shall be set straight and not imbedded in the leather. Rivets shall not be reversed on the assembly.

* 3.6 Workmanship.- Leather components shall be clean, free of holes, cuts, tears, brand marks, grub holes, scar tissue, hip marks, brittle or bony areas, abrasions, scratches, flanky, spongy or stretchy leather, or fat wrinkles. Leather edges and thread tension shall be maintained so that there will be no loose stitching. All thread ends shall be pulled through to back of collar and heat sealed. Buckles, rivets, and rings shall be free from rough edges, burrs, or corroded areas, and shall not be broken or malformed.

## 4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:44Z
Check the source to verify that this is the current version before use.

* 4.2.1 Components and materials.- In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, standards, and drawings unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

* 4.2.1.1 Chrome-vegetable, retanned, latigo leather examination.- An examination shall be made to determine that the leather is backs and is natural color, as required by 3.3.1. Any nonconformance shall be considered a defect. The lot shall consist of all collars offered for examination at one time. The sample unit shall be one collar. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

* 4.2.2 Process examination.- Examination shall be made to determine that edges of collar leather are made smooth by burnishing with a natural gum (see 3.3.3). Whenever nonconformance is noted, correction shall be made to the item affected and to the process.

* 4.2.3 End item inspection.- The lot shall consist of all completely fabricated collars offered for inspection at one time. The sample unit shall be one collar.

* 4.2.3.1 Visual examination.- The completely fabricated collar shall be examined for defects in table I and dimensional requirements of 4.2.3.2. The inspection level and acceptable quality levels (AQL's) shall be as specified in 4.2.3.3.

TABLE I.- Classification of defects for visual characteristics

| Examine | Defect | Classification Major | Minor |
|---|---|---|---|
| Leather | | | |
| Quality | Any hole, except where specified | X | |
| | Any cut or rupture | X | |
| | Brandmark, grub hole, scar tissue, hip mark, brittle or bony area | X | |
| | Abraded, scratched, or other grain damage | | X |
| | Flanky, spongy or stretchy leather | X | |
| | Fat wrinkles | | X |
| Cleanness | Grease or oil stains | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:44Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects for visual characteristics (cont'd)

| Examine | Defect | Classification Major | Minor |
|---|---|---|---|
| Hardware | Any hardware component incorrect type or finish; broken or malformed; protective finish omitted or corroded. (Unless otherwise classified herein) | X | |
| | Any burr or sharp edge | | X |
| Construction and workmanship | | | |
| Rivets | Not set tight, i.e., cap and head set off from leather surface | X | |
| | Cap loosely set, i.e., shank not fully spread and anchored within cap | X | |
| | Rivets not set straight causing one side of head or cap to be imbedded in leather | | X |
| | Reversed on assembly | | X |
| Buckle | Not type or finish as specified | X | |
| | Body or tongue malformed, or bent out of shape | X | |
| | Not assembled to strap as specified | X | |
| Seams and stitching | Any row of stitching omitted | X | |
| | Less than five or more than seven stitches per inch | | X |
| | Any open seam | X | |
| Stitching ends | Thread ends not pulled through to back of collar and heat sealed where required | | X |
| Seam and stitch type | Not specified stitch type | X | |
| Stitch tension | Loose, resulting in a loosely secured seam, or locks exposed on surface of leather | X | |
| | Tight, causing stitches to rupture leather | X | |
| Cleanness | Thread ends not heat sealed | | X |
| Marking | Omitted, incomplete, incorrect, not legible, not specified size, not in proper location or not accomplished as specified | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:44Z
Check the source to verify that this is the current version before use.

* 4.2.3.2 Dimensional examination.- Any dimension not meeting the specified requirements shall be classified as a defect. The inspection level and AQL shall be as specified in 4.2.3.3.

* 4.2.3.3 Inspection levels and AQL's.- The inspection levels and AQL's expressed in terms of defects per hundred units shall be as follows:

| Examination | Inspection levels | AQL's |
|---|---|---|
| For defects applicable to table I. | II | 2.5 Major<br>6.5 Total (major and minor defects combined) |
| For defects applicable to 4.2.3.2 | S-3 | 4.0 (one class) |

* 4.2.4 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing, and marking requirements are in compliance with section 5. Defects shall be scored in accordance with table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

TABLE II.- Examination of preparation for delivery

| Examine | Defect |
|---|---|
| Marking | Omitted, incorrect, illegible, of improper size, location, sequence, or method of application. |
| Materials | Any component missing or damaged. |
| Workmanship | Inadequate application of component such as: incomplete closure of container flaps, loose strapping, improper application of tape banding.<br>Bulging or distortion of containers. |
| Content | Number per container is more or less than specified. |

* 4.2.5 Examination of shipping container.- When shipping containers are required to be in accordance with PPP-B-636, examination for closure, waterproofing, and reinforcing shall be made in accordance with the appendix of that specification.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:44Z
Check the source to verify that this is the current version before use.

## 5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.- Five collars, each with its Dee ring folded back, shall be alternated end for end, stacked flat one on another, and securely tied at each end with cotton tape or twine to form a compact package measuring approximately 27 inches in length, 3-1/4 inches in width, and 2 inches in depth.

5.1.2 Level C.- Collars shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A.- One hundred and sixty collars, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, class weather resistant, variety DW, grade V15c, of PPP-F-320. Level A packages shall be packed on their side one in length, eight in width, and four in depth within a shipping container. Inside dimensions of each shipping container shall approximate 27-1/2 inches in length, 16-1/2 inches in width, and 13 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be closed, waterproofed, and reinforced with flat strapping or tape banding in accordance with the appendix of the container specification.

5.2.2 Level B.- One hundred and sixty collars, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF or SF, (variety SW,) class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-F-320. Level A packages shall be packed on their side one in length, eight in width, and four in depth within a shipping container. Inside dimensions of each shipping container shall approximate 27-1/2 inches in length, 16-1/2 inches in width, and 13 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be closed in accordance with method II, as specified in the appendix of the container specification.

* 5.2.2.1 When specified, (see 6.2) the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:44Z
Check the source to verify that this is the current version before use.

* 5.2.3 Level C.- Collars, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The dog collar covered by this specification is intended for use at dog training centers and military bases. The collar is adjustable and is equipped with a ring for attachment of a leash.

* 6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Selection of the applicable levels of packaging and packing required (see 5.1 and 5.2).
(c) When weather-resistant boxes are required for level B shipments (see 5.2.2.1).

* 6.3 The margins of this specification are marked with an asterisk(*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 84

Review activity:

Air Force - 84

User Activity:

Navy - MC


Preparing activity:

Army - GL

Project No. 3770-0083



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:44Z
Check the source to verify that this is the current version before use.

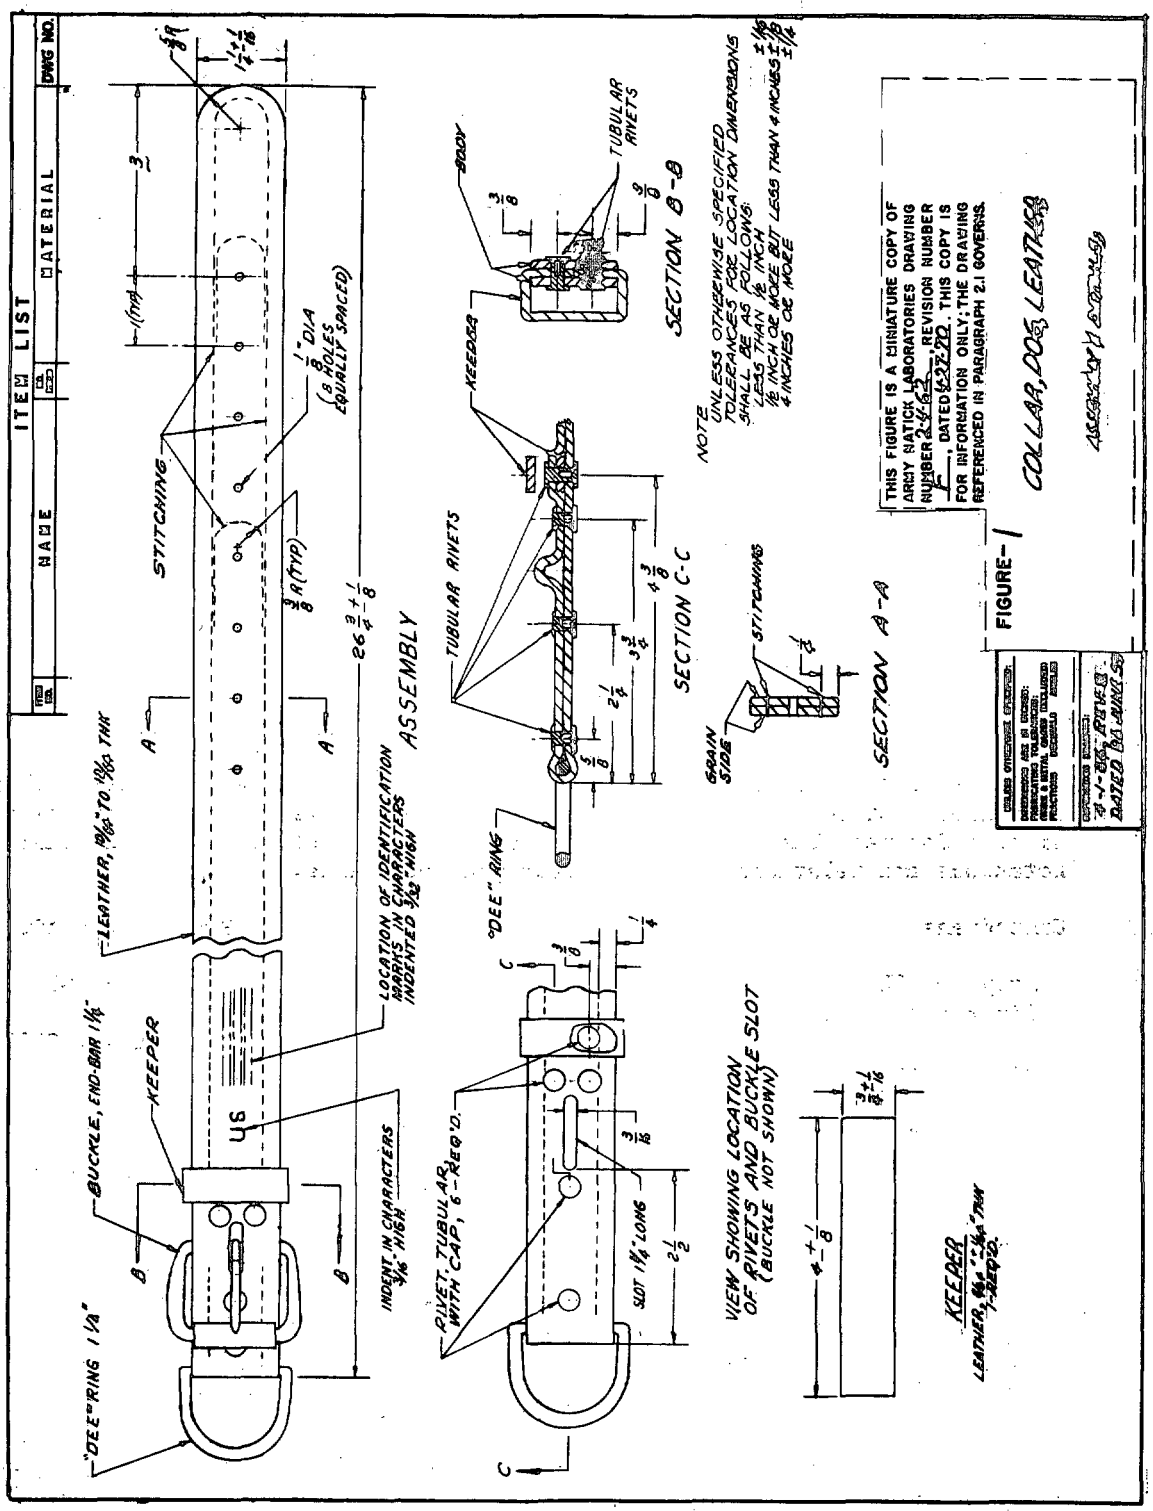




Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:44Z
Check the source to verify that this is the current version before use.

# SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

**INSTRUCTIONS:** This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-C-1161D COLLAR, DOG, LEATHER

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:44Z
Check the source to verify that this is the current version before use.