INCH-POUND
MIL-DTL-1183/12A
20 December 2016
SUPERSEDING
MIL-F-1183/12
17 June 1983

DETAIL SPECIFICATION SHEET

FITTINGS, PIPE, CAST BRONZE, SILVER-BRAZING; WITH FLANGED END(S)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-1183.

REQUIREMENTS:

1. Design.

a. On Type A fittings with flanged ends, the flange shall be attached to the fitting by brazing a nipple between the fitting and flange.

b. Integral flanges shall not be supplied on Type A fittings.

c. Integral flanges may be furnished on Type B fittings only in special cases where absolutely necessary due to space considerations.

d. Any standard or reducing MIL-DTL-1183 fitting (except caps, plugs, and unions) may have flanged end(s).

e. Typical flanged fittings with three or two flange ends are shown on figures 1 and 2.

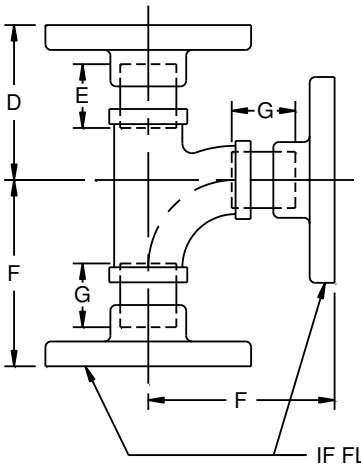


FIGURE 1. Typical fitting flanged on three ends.

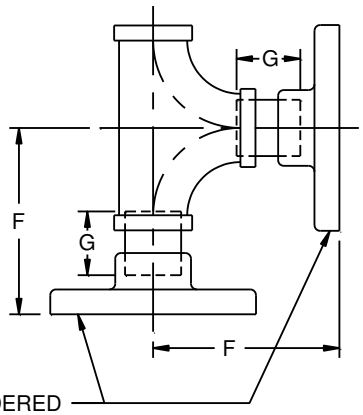


FIGURE 2. Typical fitting flanged on two ends.

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:51Z
Check the source to verify that this is the current version before use.

2. Dimensions. Nipple lengths, center-to-end dimensions, and nominal pipe sizes for flanged ends specified in table I are only typical and may be changed to meet the actual piping requirements.

TABLE I. Typical nipple length and center-to-flanged end dimensions.

Nominal pipe size (inches)	D (inches)	E (inches)	F (inches)	G (inches)
¼	2.00	0.91	2.38	0.78
⅜	2.19	1.00	2.69	0.88
½	2.38	1.13	3.00	1.00
¾	2.63	1.19	3.44	1.19
1	2.81	1.25	3.81	1.25
1¼	3.25	1.38	----	----
1½	3.63	1.63	----	----
2	3.88	1.69	----	----

3. Tolerance. Tolerances for center-to-flange face dimensions shall be the same as for center-to-end dimensions of socket fittings, as specified in table II of MIL-DTL-1183.

4. Notes.

a. MIL-DTL-1183/12 flanged fittings shall not be assigned National Stock Numbers (NSN) and are not stocked in the Federal Supply System.

b. MIL-DTL-1183/12 flanged fittings do not have a definitive military specification sheet part number.

c. MIL-DTL-1183/12 flanged fittings must be purchased on special order.

d. Requirements for the nipples and flanges shall be provided when a MIL-DTL-1183/12 flanged fitting is ordered.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army – CR4
Navy – SH
Air Force – 99

Preparing activity:
Navy – SH
(Project 4730-2016-100)

Review activity:
DLA – CC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:51Z
Check the source to verify that this is the current version before use.