
MILITARY SPECIFICATION SHEET

FITTINGS, PIPE, CAST BRONZE, SILVER-BRAZING; BEND, PIPE, RETURN


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the bends described herein shall consist of this document and the latest issue of MIL-F-1183.

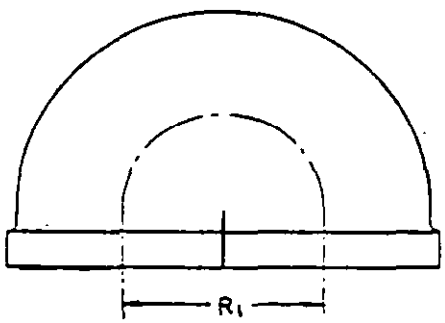

SH 12157

FIGURE 1. Close pattern.

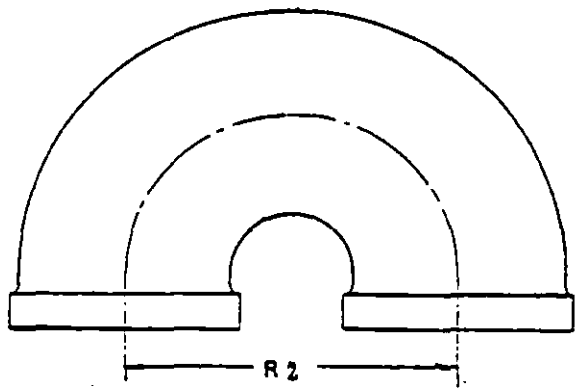

SH 12158

FIGURE 2. Open pattern.

TABLE I. Center-to-center dimensions.

Nominal pipe size	R_1	R_2
	Center-to-center, close pattern	Center-to-center, open pattern
Inches	Inches	Inches
1/2	1.00	1.50
3/4	1.25	2.00
1	1.50	2.50
1-1/4	1.88	3.00
1-1/2	2.19	3.50
2	2.63	4.00

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:47Z
Check the source to verify that this is the current version before use.

1. Close pattern bend type. Close pattern bends (see figure 1) shall be type A (streamlined interior) except for 3/4 and 1-1/4 inch nominal pipe sizes which shall be type B (interior not streamlined).

2. Open pattern bend type. Open pattern bends (see figure 2) shall be type A (streamlined interior) except for 1-1/2 and 2-inch nominal pipe sizes which shall be type B (interior not streamlined).

3. Center-to-center dimensions. The center-to-center dimensions for close pattern and open pattern bends are specified in table I.

4. Military specification sheet part number. Return bends covered by this specification sheet shall be designated in the following form (see 6.2(b) of MIL-F-1183).

M1183/1 - XX X

Military specification sheet code number
Pipe size, type and pattern code number (see requirement 5 herein)
Brazing ring groove and brazing ring code letter (see requirement 6 herein)

5. Pipe size, type and pattern. The nominal pipe size, interior contour type and pattern of bends are identified by two digits (see table II).

TABLE II. Code number to pipe size, type and pattern.

Type A		Type B		Nominal pipe size
Close	Open	Close	Open	
01	02	--	--	1/2
--	03	04	--	3/4
05	06	--	--	1
--	07	08	--	1-1/4
09	--	--	10	1-1/2
11	--	--	12	2

6. Brazing ring groove and brazing ring. Face fed (no groove), grooved without brazing ring, grooved with brazing ring inserted in groove, grooved with brazing ring(s) separately packaged and attached to the bend or grooved with brazing ring(s) separately packaged and shipped with but not attached to the bend socket ends are identified by a single letter (see table III).

Source: https://assist.dla.mil -- Downloaded: 202640-16T12:47Z
Check the source to verify that this is the current version before use.

TABLE III. Code letter to socket condition.

Code letter	Condition of socket
N	No groove (face fed)
G 1/	Grooved (no brazing ring)
R 1/	Grooved with brazing ring inserted
A 2/	Grooved with brazing ring separately packaged and attached
S 1/	Grooved with brazing ring separately packaged and shipped with

1/ No National Stock Number (NSN) shall be established or exist in the Federal Supply System for bend with the code letter of G, R or S.

2/ When the socket condition code letter is A, the brazing rings are not to be inserted in the grooves but packaged separately and either included within each individual bend package or physically attached to the bend.

7. Military specification part number definition. The military specification sheet part number is a definitive part number which is formed by combining the military specification sheet code number (M1183/1 for MIL-F-1183/1) with a dash after it, the pipe size, type and pattern code number and the brazing ring groove and brazing ring code letter as specified in requirement 4.

Custodians:
Army - ME
Navy - SH
Air Force - 99

Review activity:
DLA - CS

Preparing activity:
Navy - SH

Agent:
DLA - CS

(Project 4730-0044)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:47Z
Check the source to verify that this is the current version before use.