INCH-POUND
MIL-DTL-1183/2A
20 December 2016
SUPERSEDING
MIL-F-1183/2
17 June 1983

DETAIL SPECIFICATION SHEET

FITTINGS, PIPE, CAST BRONZE, SILVER-BRAZING; CAP, PIPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-1183.

REQUIREMENTS:

1. Cap type. Caps shall be Type B (interior not streamlined).

2. Cap design. Cap design may be flat top with internal recess, flat top without internal recess (see figure 1), crowned top with internal recess (see figure 2), or crowned top without internal recess. For each design, the side and top wall thicknesses shall be not less than that given in table I for the required nominal pipe size. Caps may be furnished with or without ribs.

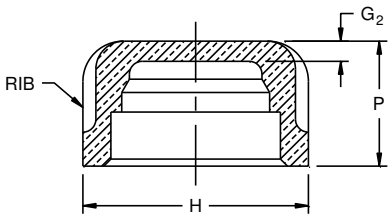


FIGURE 1. Flat cap (without recess).

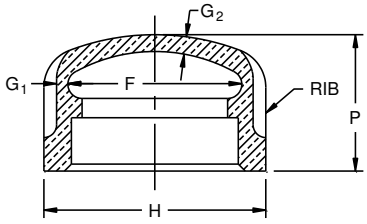


FIGURE 2. Crowned cap (with recess).

TABLE I. Cap dimensions, inches.

Nominal pipe size	F	G_1	G_2	H	P (reference)	Thickness of ribs (min)
	Inside diameter of fittings (max)	Metal thickness of sides (min)	Metal thickness of top (min)	Band diameter (min)	Height 1/	
¼	0.58	0.08	0.10	0.81	0.59	0.08
⅜	0.72	0.09	0.11	1.00	0.64	0.09
½	0.90	0.09	0.12	1.17	0.76	0.09
¾	1.11	0.10	0.13	1.42	0.84	0.10
1	1.39	0.11	0.15	1.72	0.99	0.11
1¼	1.73	0.12	0.17	2.10	1.10	0.12

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:48Z
Check the source to verify that this is the current version before use.

TABLE I. Cap dimensions, inches – Continued.

Nominal pipe size	F	G_1	G_2	H	P (reference)	Thickness of ribs (min)
	Inside diameter of fittings (max)	Metal thickness of sides (min)	Metal thickness of top (min)	Band diameter (min)	Height 1/	
1½	1.97	0.13	0.19	2.28	1.15	0.13
2	2.45	0.15	0.22	2.92	1.32	0.15
2½	2.98	0.17	0.25	3.49	1.70	0.17
3	3.60	0.19	0.29	4.20	1.80	0.19
3½	4.10	0.20	0.32	4.75	1.90	0.20
4	4.60	0.22	0.36	5.31	2.08	0.22
5	5.66	0.30	0.45	6.29	2.32	0.30
6	6.72	0.34	0.55	7.42	2.50	0.34
8	8.725	0.40	0.60	9.425	3.00	0.50
10	10.850	0.48	0.70	11.70	3.50	0.50
12	12.85	0.575	0.80	13.84	4.00	0.50

NOTE:
1/ Height dimensions of sizes ¼ through 2 inches do not include allowance for draft or crown of top.

3. Cap dimensions. Dimensions for caps are specified in table I.

4. Specification sheet part number. The specification sheet part number is a definitive part number that is formed by combining the specification sheet code number (M1183/2 for MIL-DTL-1183/2) with a dash after it, the nominal pipe size code number, and the brazing ring groove and code letter. Caps covered by this specification sheet shall be designated in the following form (see 6.2.b of MIL-DTL-1183):

M1183/2 – XX X

Specification sheet code number

Nominal pipe size code number (see requirement 5 herein)

Brazing ring groove and brazing ring code letter (see requirement 6 herein)

5. Nominal pipe size. The nominal pipe size of caps is identified by two digits (see table II).

TABLE II. Code number to size.

Code number	Nominal pipe size
01	¼
02	⅜
03	½
04	¾
05	1
06	1¼
07	1½

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:48Z
Check the source to verify that this is the current version before use.

TABLE II. Code number to size – Continued.

Code number	Nominal pipe size
08	2
09	2½
10	3
11	3½
12	4
13	5
14	6
15	8
16	10
17	12

6. Brazing ring groove and brazing ring. Face fed (no groove), grooved without brazing ring, grooved with brazing ring inserted in groove, or grooved with brazing ring(s) separately packaged and shipped with but not attached to the cap socket ends are identified by a single letter (see table III).

TABLE III. Code letter to socket condition.

Code letter	Condition of socket
N	No groove (face fed)
G 1/	Grooved (no brazing ring)
R 1/	Grooved with brazing ring inserted
S 2/	Grooved with brazing ring separately packaged and shipped with

NOTES:

1/ No National Stock Number (NSN) shall be established or exist in the Federal Supply System for cap with the code letter of G or R.

2/ When the socket condition code letter is S, the brazing ring is not to be inserted in groove, but packaged separately and included within each individual cap package.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army – CR4
Navy – SH
Air Force – 99

Preparing activity:
Navy – SH
(Project 4730-2016-090)

Review activity:
DLA – CC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:48Z
Check the source to verify that this is the current version before use.