INCH-POUND
MIL-DTL-1183/2A
w/AMENDMENT 1
20 August 2019
SUPERSEDING
MIL-DTL-1183/2A
20 December 2016

DETAIL SPECIFICATION SHEET

FITTINGS, PIPE, CAST BRONZE, SILVER-BRAZING; CAP, PIPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-1183.

REQUIREMENTS:

1. Cap type. Caps shall be Type B (interior not streamlined).

2. Cap design. Cap design may be flat top with internal recess, flat top without internal recess (see figure 1), crowned top with internal recess (see figure 2), or crowned top without internal recess. For each design, the side and top wall thicknesses shall be not less than that given in table I for the required nominal pipe size. Caps may be furnished with or without ribs.

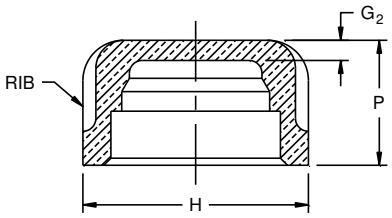


FIGURE 1. Flat cap (without recess).

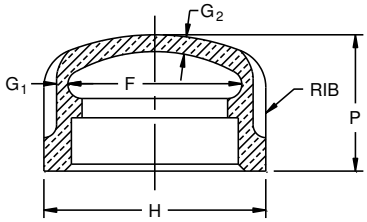


FIGURE 2. Crowned cap (with recess).

TABLE I. Cap dimensions, inches.

Nominal pipe size	F	G_1	G_2	H	P (reference)	Thickness of ribs (min)
	Inside diameter of fittings (max)	Metal thickness of sides (min)	Metal thickness of top (min)	Band diameter (min)	Height 1/	
¼	0.58	0.08	0.10	0.81	0.59	0.08
⅜	0.72	0.09	0.11	1.00	0.64	0.09
½	0.90	0.09	0.12	1.17	0.76	0.09
¾	1.11	0.10	0.13	1.42	0.84	0.10
1	1.39	0.11	0.15	1.72	0.99	0.11

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:47Z
Check the source to verify that this is the current version before use.


TABLE I. Cap dimensions, inches – Continued.

Nominal pipe size	F	G_1	G_2	H	P (reference)	Thickness of ribs (min)
	Inside diameter of fittings (max)	Metal thickness of sides (min)	Metal thickness of top (min)	Band diameter (min)	Height 1/	
1¼	1.73	0.12	0.17	2.10	1.10	0.12
1½	1.97	0.13	0.19	2.38	1.15	0.13
2	2.45	0.15	0.22	2.92	1.32	0.15
2½	2.98	0.17	0.25	3.49	1.70	0.17
3	3.60	0.19	0.29	4.20	1.80	0.19
3½	4.10	0.20	0.32	4.75	1.90	0.20
4	4.60	0.22	0.36	5.31	2.08	0.22
5	5.66	0.30	0.45	6.29	2.32	0.30
6	6.72	0.34	0.55	7.42	2.50	0.34
8	8.725	0.40	0.60	9.425	3.00	0.50
10	10.850	0.48	0.70	11.70	3.50	0.50
12	12.85	0.575	0.80	13.84	4.00	0.50

NOTE:
1/ Height dimensions of sizes ¼ through 2 inches do not include allowance for draft or crown of top.

3. Cap dimensions. Dimensions for caps are specified in table I.

4. Specification sheet part number. The specification sheet part number is a definitive part number that is formed by combining the specification sheet code number (M1183/2 for MIL-DTL-1183/2) with a dash after it, the nominal pipe size code number, the brazing ring groove and code letter, and an optional dash and lead-free fitting identifier. Caps covered by this specification sheet shall be designated in the following form (see 6.2.b of MIL-DTL-1183):

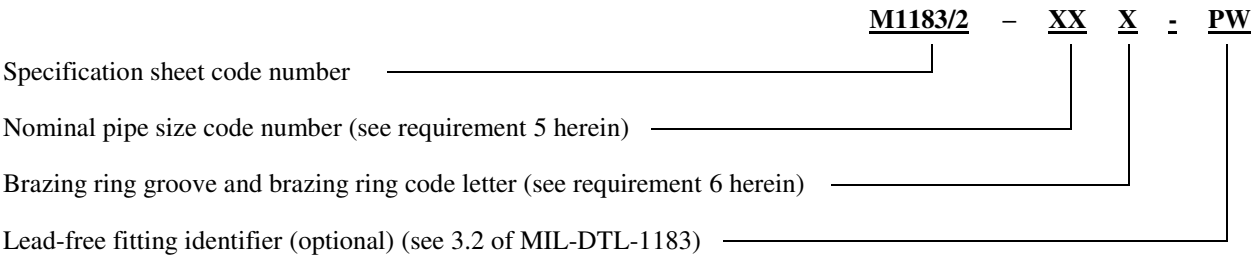

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:47Z
Check the source to verify that this is the current version before use.

5. Nominal pipe size. The nominal pipe size of caps is identified by two digits (see table II).

TABLE II. Code number to size.

Code number	Nominal pipe size
01	¼
02	⅜
03	½
04	¾
05	1
06	1¼
07	1½
08	2
09	2½
10	3
11	3½
12	4
13	5
14	6
15	8
16	10
17	12

6. Brazing ring groove and brazing ring. Face fed (no groove), grooved without brazing ring, grooved with brazing ring inserted in groove, or grooved with brazing ring(s) separately packaged and shipped with but not attached to the cap socket ends are identified by a single letter (see table III).

TABLE III. Code letter to socket condition.

Code letter	Condition of socket
N	No groove (face fed)
G 1/	Grooved (no brazing ring)
R 1/	Grooved with brazing ring inserted
S 2/	Grooved with brazing ring separately packaged and shipped with

NOTES:

1/ No National Stock Number (NSN) shall be established or exist in the Federal Supply System for cap with the code letter of G or R.

2/ When the socket condition code letter is S, the brazing ring is not to be inserted in groove, but packaged separately and included within each individual cap package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:47Z
Check the source to verify that this is the current version before use.

AMENDMENT NOTATIONS. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

CONCLUDING MATERIAL

Custodians:
Army – CR4
Navy – SH

Preparing activity:
Navy – SH
(Project 4730-2019-022)

Review activity:
DLA – CC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:47Z
Check the source to verify that this is the current version before use.