INCH-POUND
MIL-DTL-1183/4A
20 December 2016
SUPERSEDING
MIL-F-1183/4
17 June 1983

DETAIL SPECIFICATION SHEET

# FITTINGS, PIPE, CAST BRONZE, SILVER-BRAZING; CROSS, PIPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-1183.

REQUIREMENTS:

1. Cross type. Regular crosses (see figure 1) shall be Type A (streamlined interior).

2. Reducing cross type. Reducing crosses (see figure 2) shall be Type B (interior not streamlined).

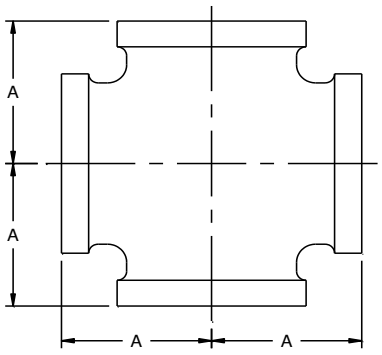



FIGURE 1. Cross.

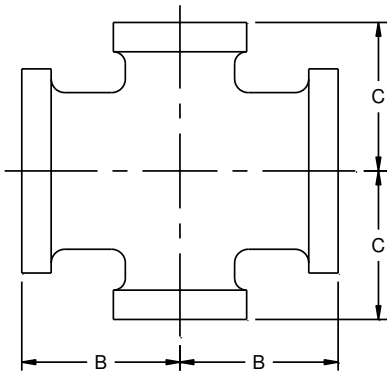



FIGURE 2. Reducing cross.



DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:48Z
Check the source to verify that this is the current version before use.

3. Identification of reducing cross end sizes. In identifying reducing cross end sizes, the run ends are given first and then the outlet ends are given last. A cross with reducing outlets, as shown on figure 3, is identified as a 4- by 3-inch nominal pipe size reducing cross. A cross with reduced run and outlets, as specified on figure 4, is identified as a ½- by ⅜- by ⅜- by ⅜-inch nominal pipe size reducing cross.





FIGURE 3. Reduced outlet.

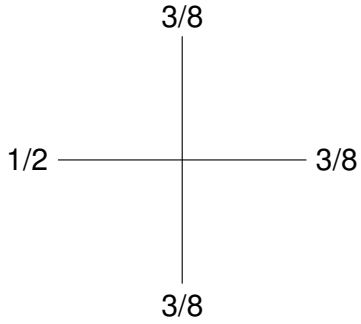



FIGURE 4. Reduced run and outlet.

4. Center-to-end dimensions. The center-to-end dimensions for crosses and reducing crosses shall be as specified in table I.

TABLE I. Center-to-end dimensions, inches.

| Nominal pipe size | Center-to-end | | |
|---|---|---|---|
| | A | B | C |
| ¼ (all ends) | 0.71 | | |
| ⅜ x ¼ | | 0.75 | 0.78 |
| ⅜ (all ends) | 0.82 | | |
| ½ x ⅜ x ⅜ x ⅜ | | 0.81 | 0.90 |
| ½ x ⅜ | | 0.93 | 0.90 |
| ½ (all ends) | 1.01 | | |
| ¾ x ⅜ | | 1.00 | 1.00 |
| ¾ x ½ | | 1.08 | 1.11 |
| ¾ (all ends) | 1.18 | | |
| 1 x ⅜ | | 1.20 | 1.24 |
| 1 x ½ | | 1.20 | 1.24 |
| 1 x ¾ | | 1.30 | 1.31 |
| 1 (all ends) | 1.43 | | |
| 1¼ x ½ | | 1.29 | 1.41 |
| 1/ 1¼ x ¾ | | 1.52 | 1.60 |
| 1¼ x 1 | | 1.52 | 1.60 |
| 1¼ (all ends) | 1.69 | | |
| 1½ x ¾ | | 1.42 | 1.60 |
| 1½ x 1 | | 1.55 | 1.72 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:48Z
Check the source to verify that this is the current version before use.

TABLE I. Center-to-end dimensions, inches – Continued.

| Nominal pipe size | Center-to-end | | |
|---|---|---|---|
| | A | B | C |
| 1½ x 1¼ | | 1.72 | 1.81 |
| 1½ (all ends) | 1.84 | | |
| 2 x ¾ | | 1.47 | 1.84 |
| 2 x 1 | | 1.59 | 1.95 |
| 2/ 2 x 1¼ | | 1.89 | 2.07 |
| 2 x 1½ | | 1.89 | 2.07 |
| 2 (all ends) | 2.12 | | |
| 2½ x 2 | | 2.39 | 2.60 |
| 2½ (all ends) | 2.70 | | |
| 3 x 2½ | | 2.83 | 2.99 |
| 3 (all ends) | 3.08 | | |
| 3½ (all ends) | 3.42 | | |
| 4 x 3 | | 3.30 | 3.60 |
| 4 (all ends) | 3.79 | | |
| 5 x 4 | | 4.00 | 4.41 |
| 5 (all ends) | 4.50 | | |
| 6 (all ends) | 5.13 | | |
| 8 (all ends) | 6.56 | | |

NOTES:
1/ Bushed from 1¼ x 1.
2/ Bushed from 2 x 1½.

5. Specification sheet part number. The specification sheet part number is a definitive part number that is formed by combining the specification sheet code number (M1183/4 for MIL-DTL-1183/4) with a dash after it, the cross style and pipe size code number, and the brazing ring groove and code letter. Crosses covered by this specification sheet shall be designated in the following form (see 6.2.b of MIL-DTL-1183):

**M1183/4 – XX X**

Specification sheet code number

Cross style and pipe size code number (see requirement 6 herein)

Brazing ring groove and brazing ring code letter (see requirement 7 herein)

6. Cross style and pipe size. The cross style (cross or reducing cross) and nominal pipe size(s) are identified by two digits (see table II).



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:48Z
Check the source to verify that this is the current version before use.

TABLE II. Code number to style and size.

| Cross (Type A) | Reducing cross (Type B) | Nominal pipe size (inches) |
|---|---|---|
| 01 | | ¼ (all ends) |
| | 21 | ⅜ x ¼ |
| 02 | | ⅜ (all ends) |
| | 22 | ½ x ⅜ x ⅜ x ⅜ |
| | 23 | ½ x ⅜ |
| 03 | | ½ (all ends) |
| | 24 | ¾ x ⅜ |
| | 25 | ¾ x ½ |
| 04 | | ¾ (all ends) |
| | 26 | 1 x ⅜ |
| | 27 | 1 x ½ |
| | 28 | 1 x ¾ |
| 05 | | 1 (all ends) |
| | 29 | 1¼ x ½ |
| | 30 | 1¼ x ¾ |
| | 31 | 1¼ x 1 |
| 06 | | 1¼ (all ends) |
| | 32 | 1½ x ¾ |
| | 33 | 1½ x 1 |
| | 34 | 1½ x 1¼ |
| 07 | | 1½ (all ends) |
| | 35 | 2 x ¾ |
| | 36 | 2 x 1 |
| | 37 | 2 x 1¼ |
| | 38 | 2 x 1½ |
| 08 | | 2 (all ends) |
| | 39 | 2½ x 2 |
| 09 | | 2½ (all ends) |
| | 40 | 3 x 2½ |
| 10 | | 3 (all ends) |
| 11 | | 3½ (all ends) |
| | 41 | 4 x 3 |
| 12 | | 4 (all ends) |
| | 42 | 5 x 4 |
| 13 | | 5 (all ends) |
| 14 | | 6 (all ends) |
| 15 | | 8 (all ends) |



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:48Z
Check the source to verify that this is the current version before use.

7. Brazing ring groove and brazing ring. Face fed (no groove), grooved without brazing ring, grooved with brazing ring inserted in groove, grooved with brazing ring(s) separately packaged and attached to the cross, or grooved with brazing ring(s) separately packaged and shipped with but not attached to the cross socket ends are identified by a single letter (see table III).

TABLE III. Code letter to socket condition.

| Code letter | Condition of socket |
|---|---|
| N | No groove (face fed) |
| G 1/ | Grooved (no brazing ring) |
| R 1/ | Grooved with brazing ring inserted |
| A 2/ | Grooved with brazing ring separately packaged and attached |
| S 1/ 2/ | Grooved with brazing ring separately packaged and shipped with |

NOTES:

1/ No National Stock Number (NSN) shall be established or exist in the Federal Supply System for cross with the code letter of G, R, or S.

2/ When the socket condition code letter is A or S, the brazing rings shall not be inserted in the grooves, but packaged separately. For condition code letter A, the packaged brazing ring shall be either included within each individual cross package or physically attached to the cross. For condition code letter S, the brazing ring shall be included within each individual bend package.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army – CR4
Navy – SH
Air Force – 99

Preparing activity:
Navy – SH
(Project 4730-2016-092)

Review activity:
DLA – CC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:48Z
Check the source to verify that this is the current version before use.