
MILITARY SPECIFICATION SHEET


FITTINGS, PIPE, CAST BRONZE, SILVER-BRAZING; ELBOW, PIPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for acquiring the elbows described herein shall consist of this document and the latest issue of specification MIL-F-1183.

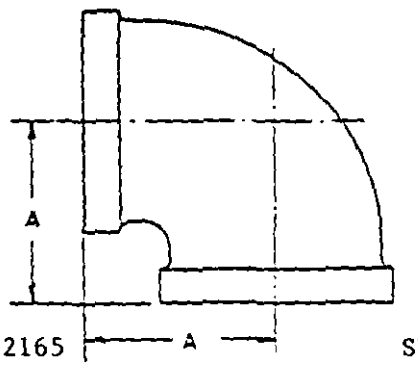

SH 12165

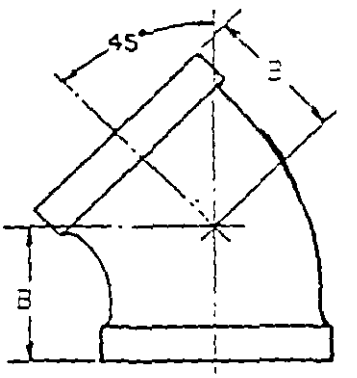

SH 12166

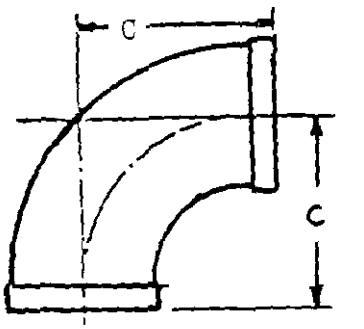

SH 12167

FIGURE 1. Elbow, 90 degree. FIGURE 2. Elbow, 45 degree. FIGURE 3. Elbow, 90 degree, long turn.

TABLE I. Center-to-end dimensions.

Nominal pipe size (Inches)	Center-to-end (Inches)		
	A	B	C
1/4	0.71	0.56	1.25
3/8	.82	.63	1.50
1/2	1.01	.78	1.75
3/4	1.18	.89	2.00
1	1.43	1.06	2.31
1-1/4	1.69	1.22	2.75
1-1/2	1.84	1.30	3.13
2	2.12	1.45	3.75
2-1/2	2.70	1.95	4.50
3	3.08	2.17	5.44
3-1/2	3.42	2.39	6.19
4	3.79	2.61	6.94
5	4.50	3.05	8.13
6	5.13	3.46	9.00
8	6.56	4.28	10.00
10	8.08	5.16	11.00
12	9.50	5.97	---

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:48Z
Check the source to verify that this is the current version before use.

1. Elbow type. Forty-five degree (see figure 2), 90 degree (see figure 1) and 90 degree long turn (see figure 3) elbows shall be type A (streamlined interior).

2. Center-to-end dimensions. The center-to-end dimensions for 45 degree, 90 degree and 90 degree long turn elbows shall be specified in table I.

3. Military specification sheet part number. Elbows covered by this specification sheet shall be designated in the following form (see 6.2(b) of MIL-F-1183).

MIL183/5 - XX X

Military specification sheet code number
Elbow style and pipe size code number (see requirement 4 herein)
Brazing ring groove and brazing ring code letter (see requirement 5 herein)

4. Elbow style and pipe size. The elbow style (45 degree, 90 degree or 90 degree long turn) and nominal pipe size are identified by two digits (see table II.)

TABLE II. Code number to style and size.

90 degree	45 degree	90 degree long turn	Nominal pipe size
01	21	41	1/4
02	22	42	3/8
03	23	43	1/2
04	24	44	3/4
05	25	45	1
06	26	46	1-1/4
07	27	47	1-1/2
08	28	48	2
09	29	49	2-1/2
10	30	50	3
11	31	51	3-1/2
12	32	52	4
13	33	53	5
14	34	54	6
15	35	55	8
16	36	56	10
17	37		12

5. Brazing ring groove and brazing ring. Face fed (no groove), grooved without brazing ring, grooved with brazing ring inserted in groove, grooved with brazing ring(s) separately packaged and attached to the elbow or grooved with brazing rings(s) separately packaged and shipped with but not attached to the elbow socket ends are identified by a single letter (see table III).

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:48Z
Check the source to verify that this is the current version before use.

TABLE III. Code letter to socket condition.

Code letter	Condition of socket
N	No groove (face fed)
G 1/	Grooved (no brazing ring)
R 1/	Grooved with brazing ring inserted
A 2/	Grooved with brazing ring separately packaged and attached
S 1/	Grooved with brazing ring separately packaged and shipped with

1/ No National Stock Number (NSN) shall be established or exist in the Federal Supply System for elbow with the code letter of G, R or S.

2/ When the socket condition code letter is A, the brazing rings are not to be inserted in the grooves but packaged separately and either included within each individual elbow package or physically attached to the elbow.

6. Military specification part number definition. The military specification sheet part number is a definitive part number which is formed by combining the military specification sheet code number (M1183/5 for MIL-F-1183/5) with a dash after it, the elbow style and pipe size code number and the brazing ring groove and brazing ring code letter as specified in requirement 3.

Custodians:
Army - ME
Navy - SH
Air Force - 99

Review activity:
DLA - CS

Preparing activity:
Navy - SH

Agent:
DLA - CS

(Project 4730-0048)

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:48Z
Check the source to verify that this is the current version before use.